





T5 Watt-Miser™ - High Efficiency, G5 Cap FT5/26W/840/GE/WM/SL1/30

61078

Product information

T5 Watt-Miser™ lamps are energy saving triphosphor fluorescent lamps with 16mm outer diameter for general T5 lighting applications.

Application areas



Retail



Office



(III) Education



Industrial









Product data

Bulb Diameter [mm] 16 Bulb maximum overall diameter [mm] 16 Cap to Cap Length (Max) [mm] 1149 Net weight per piece [g] 105 Gross weight per piece [g] 130 Mercury Content [mg] 2.5 UV radiance Exempt	Cap/Base	G5
Bulb maximum overall diameter [mm] 16 Cap to Cap Length (Max) [mm] 1149 Net weight per piece [g] 105 Gross weight per piece [g] 130 Mercury Content [mg] 2.5 UV radiance Exempt	Bulb Shape	Tubular
Cap to Cap Length (Max) [mm] 1149 Net weight per piece [g] 105 Gross weight per piece [g] 130 Mercury Content [mg] 2.5 UV radiance Exempt	Bulb Diameter [mm]	16
Net weight per piece [g] 105 Gross weight per piece [g] 130 Mercury Content [mg] 2.5 UV radiance Exempt	Bulb maximum overall diameter [mm]	16
Gross weight per piece [g] 130 Mercury Content [mg] 2.5 UV radiance Exempt	Cap to Cap Length (Max) [mm]	1149
Mercury Content [mg] 2.5 UV radiance Exempt	Net weight per piece [g]	105
UV radiance Exempt	Gross weight per piece [g]	130
- '	Mercury Content [mg]	2.5
Pagulatary comment	UV radiance	Exempt
Regulatory comment EUP related	Regulatory comment	EUP related
Brand General Electric (GE)	Brand	General Electric (GE)

Performance data

Nominal correlated colour temperature (CCT) [K] 4000 Nominal lumens [lm] 2900 Lumen at 25°C [lm] 2640 Rated efficacy [lm/W] 110 Energy efficiency class (EEC) A+ Rated Life [h] 25000 Rated median life on electronic (HF) ballast on IEC 12-hour cycle Rated median life on electronic (HF) ballast on IEC 3-hour cycle	Colour Code	840
Nominal lumens [lm] 2900 Lumen at 25°C [lm] 2640 Rated efficacy [lm/W] 110 Energy efficiency class (EEC) A+ Rated Life [h] 25000 Rated median life on electronic (HF) ballast on IEC 12-hour cycle Rated median life on electronic (HF) ballast on IEC 3-hour cycle	Colour Rendering Index (CRI) [Ra]	85
Lumen at 25°C [lm] Rated efficacy [lm/W] Energy efficiency class (EEC) A+ Rated Life [h] 25000 Rated median life on electronic (HF) ballast on IEC 12- hour cycle Rated median life on electronic (HF) ballast on IEC 3- hour cycle	Nominal correlated colour temperature (CCT) [K]	4000
Rated efficacy [lm/W] 110 Energy efficiency class (EEC) A+ Rated Life [h] 25000 Rated median life on electronic (HF) ballast on IEC 12- hour cycle Rated median life on electronic (HF) ballast on IEC 3- hour cycle	Nominal lumens [lm]	2900
Energy efficiency class (EEC) Rated Life [h] Rated median life on electronic (HF) ballast on IEC 12- hour cycle Rated median life on electronic (HF) ballast on IEC 3- hour cycle 25000	Lumen at 25°C [lm]	2640
Rated Life [h] 25000 Rated median life on electronic (HF) ballast on IEC 12-30000 hour cycle Rated median life on electronic (HF) ballast on IEC 3-40000 hour cycle	Rated efficacy [lm/W]	110
Rated median life on electronic (HF) ballast on IEC 12- 30000 hour cycle Rated median life on electronic (HF) ballast on IEC 3- 25000 hour cycle	Energy efficiency class (EEC)	A+
hour cycle Rated median life on electronic (HF) ballast on IEC 3- 25000 hour cycle	Rated Life [h]	25000
hour cycle	Rated median life on electronic (HF) ballast on IEC 12-hour cycle	30000
Weighted energy consumption [kWh/1000h] 29.51	Rated median life on electronic (HF) ballast on IEC 3-hour cycle	25000
	Weighted energy consumption [kWh/1000h]	29.51





Electrical data

Nominal power [W]	26
Design Ambient Temperature [°C]	35
Design Lamp ambient temperature [°C]	35
Starting ambient temperature range	-15
Dimming Capability	No


Logistic data


DUN Code	10043168610787
EAN Code	0043168883566
Pack Quantity	30
Inner pack type	SLEEVE
Outer pack type	OUTER BOX
Layer quantity	180 EUR, 240 UK
Layer quantity EUR	180
Layer quantity UK	240
Pallet quantity EUR (PC)	1800
Pallet quantity UK (PC)	2400
Outer case size	1190 × 120 × 102 (mm)
Product status	Available






Technical drawing

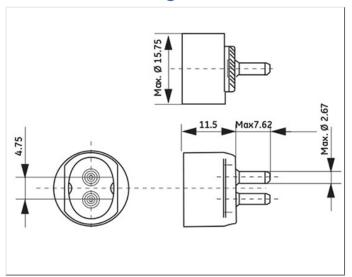

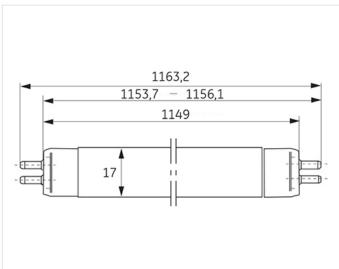


Lumen maintenance data

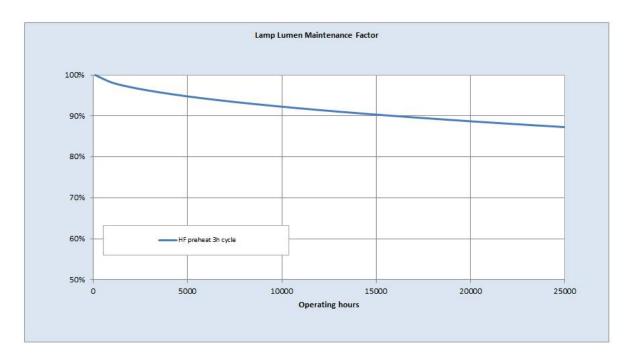






Survival data

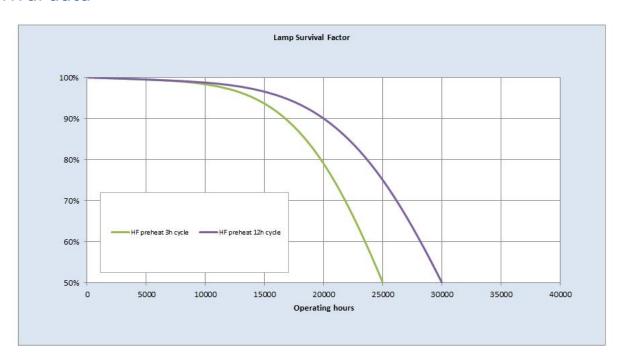

Service life data

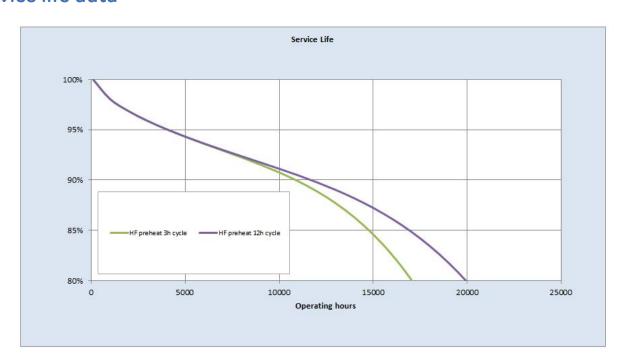





T5 Watt-Miser™ - High Efficiency, G5 Cap FT5/26W/840/GE/WM/SL1/30

61078

Downloads & Links

Go to the catalog site (HTTP)

Linear Fluorescent Lamps Catalogue (PDF)

LFL T5 Watt-Miser™ Lamps Data sheet (EN) (PDF)

Lighting design tools & calculators (HTTP)

High-res images / Technical drawings (HTTP)

Certificate for the Quality Management System of GE Lighting EMEA (PDF)

Certificate for the Environmental Management System of GE Lighting EMEA (PDF)