





T5 LongLast™ - High Output, G5 Cap FT5/54W/840/GE/LL/SL1/30

61111

Product information

T5 LongLast™ lamps are triphosphor fluorescent lamps with 16mm outer diameter (5/8 of an inch). These lamps feature "Starcoat™ Technology" that delivers high quality triphosphor performance. GE produces two ranges of T5 LongLast™ lamps in 4 different lengths:

- High Efficiency offering high lumens per watt
- High Output offering improved lumen package

Application areas





Office



Education



Industrial









Product data

Cap/Base	G5
Bulb Shape	Tubular
Bulb Diameter [mm]	16
Bulb maximum overall diameter [mm]	16
Cap to Cap Length (Max) [mm]	1149
Net weight per piece [g]	101
Gross weight per piece [g]	130
Mercury Content [mg]	2.5
UV radiance	Exempt
Regulatory comment	EUP related
Brand	General Electric (GE)

Performance data

Nominal correlated colour temperature (CCT) [K] 4000 Nominal lumens [Im] 5000 Lumen at 25°C [Im] 4460 Rated efficacy [Im/W] 93 Energy efficiency class (EEC) A+ Rated Life [h] 30000 Rated median life on electronic (HF) ballast on IEC 12-hour cycle Rated median life on electronic (HF) ballast on IEC 3-30000	Colour Code	840
Nominal lumens [Im] 5000 Lumen at 25°C [Im] 4460 Rated efficacy [Im/W] 93 Energy efficiency class (EEC) A+ Rated Life [h] 30000 Rated median life on electronic (HF) ballast on IEC 12-hour cycle Rated median life on electronic (HF) ballast on IEC 3-hour cycle	Colour Rendering Index (CRI) [Ra]	85
Lumen at 25°C [lm] Rated efficacy [lm/W] 93 Energy efficiency class (EEC) A+ Rated Life [h] 30000 Rated median life on electronic (HF) ballast on IEC 12- hour cycle Rated median life on electronic (HF) ballast on IEC 3- hour cycle	Nominal correlated colour temperature (CCT) [K]	4000
Rated efficacy [lm/W] Energy efficiency class (EEC) Rated Life [h] Rated median life on electronic (HF) ballast on IEC 12- hour cycle Rated median life on electronic (HF) ballast on IEC 3- hour cycle	Nominal lumens [lm]	5000
Energy efficiency class (EEC) Rated Life [h] Rated median life on electronic (HF) ballast on IEC 12- hour cycle Rated median life on electronic (HF) ballast on IEC 3- hour cycle 30000	Lumen at 25°C [lm]	4460
Rated Life [h] 30000 Rated median life on electronic (HF) ballast on IEC 12- 36000 hour cycle Rated median life on electronic (HF) ballast on IEC 3- 30000 hour cycle	Rated efficacy [lm/W]	93
Rated median life on electronic (HF) ballast on IEC 12- 36000 hour cycle Rated median life on electronic (HF) ballast on IEC 3- 30000 hour cycle	Energy efficiency class (EEC)	A+
hour cycle Rated median life on electronic (HF) ballast on IEC 3- 30000 hour cycle	Rated Life [h]	30000
hour cycle	Rated median life on electronic (HF) ballast on IEC 12-hour cycle	36000
Weighted energy consumption [kWh/1000h] 58.69	Rated median life on electronic (HF) ballast on IEC 3-hour cycle	30000
	Weighted energy consumption [kWh/1000h]	58.69





Electrical data

Nominal power [W]	54
Design Ambient Temperature [°C]	35
Design Lamp ambient temperature [°C]	35
Starting ambient temperature range	-15
Dimming Capability	Yes


Logistic data


DUN Code	10043168611111
EAN Code	0043168902755
Pack Quantity	30
Inner pack type	SLEEVE
Outer pack type	OUTER BOX
Layer quantity	180 EUR, 240 UK
Layer quantity EUR	180
Layer quantity UK	240
Pallet quantity EUR (PC)	1800
Pallet quantity UK (PC)	2400
Outer case size	1190 × 120 × 102 (mm)
Product status	Available






Technical drawing

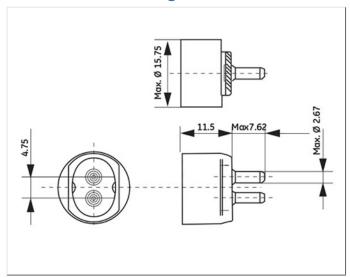




Lumen maintenance data

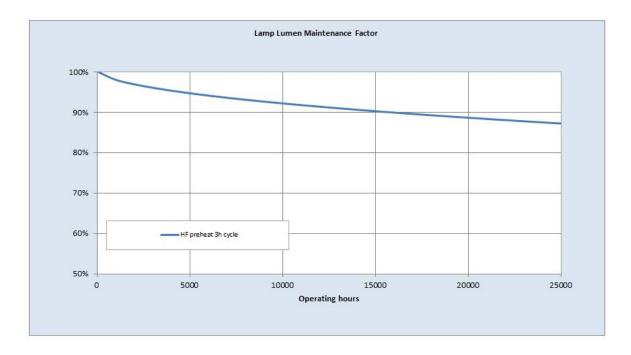






Survival data

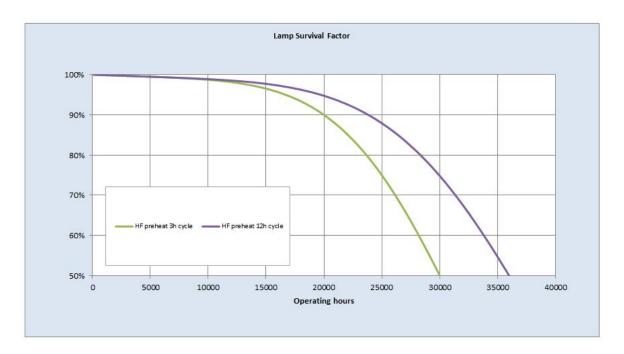

Service life data

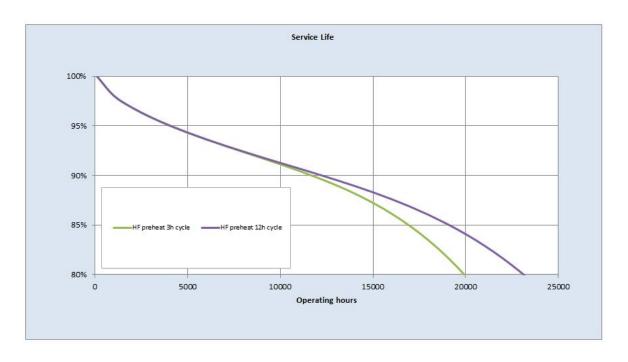





T5 LongLast™ - High Output, G5 Cap FT5/54W/840/GE/LL/SL1/30

61111

Downloads & Links

Go to the catalog site (HTTP)

Linear Fluorescent Lamps Catalogue (PDF)

LFL T5 LongLast™ Lamps - Data sheet (EN) (PDF)

Lighting design tools & calculators (HTTP)

High-res images / Technical drawings (HTTP)

Certificate for the Quality Management System of GE Lighting EMEA (PDF)

Certificate for the Environmental Management System of GE Lighting EMEA (PDF)