







GE Start GLS

LED7/A60/865/100-240V/E27/F HBX 1/6

71141

Product information

A new range of highly competitive LED GLS products with up to an incredible 1500 lumen output. Consuming only 7W, 10W and 13W and 16W power, they are a fantastic energy saving alternative to traditional GLS lamps with new, high quality aesthetics.

Application areas





(日本) Hospitality









Product data

Cap/Base	E27
Bulb Shape	GLS
Bulb Finish	White
Bulb Diameter [mm]	60
Bulb maximum overall diameter [mm]	62
Maximum Overall Length [mm]	109
Net weight per piece [g]	64
Gross weight per piece [g]	133
Brand	General Electric (GE)

Performance data

Colour Rendering Index (CRI) [Ra]	80
Nominal correlated colour temperature (CCT) [K]	6500
Nominal lumens [lm]	500
Rated Lumens [lm]	500
Nominal useful lumens [lm]	500
Energy efficiency class (EEC)	A+
Rated life L70/B50 [h]	25000
Weighted energy consumption [kWh/1000h]	7





Electrical data

Nominal power [W]	7
Rated power [W]	7.0
Nominal lamp power factor	0.9
Nominal lamp voltage [V]	230
Lamp Current [A]	0.081
Operating Temperature (MAX) [°C]	80
Run-up time (sec)	<0.5
Starting time (sec)	<0.5
Number of switching cycles	100000
Dimming Capability	No


Logistic data

DUN Code	10043168711415
EAN Code	0043168711418
Pack Quantity	6
Inner pack type	HANGING BOX
Outer pack type	OUTER BOX
Layer quantity	150 EUR, 192 UK
Layer quantity EUR	150
Layer quantity UK	192
Pallet quantity EUR (PC)	1050
Pallet quantity UK (PC)	1344
Outer case size	229 x 153 x 154 (mm)
Product status	Available





Technical drawing

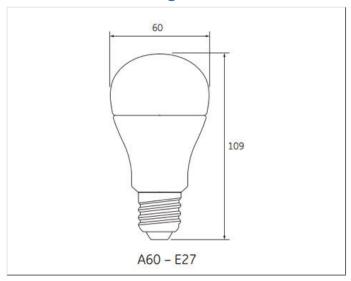

Downloads & Links

Go to the catalog site (HTTP)

Product datasheet (PDF)

LED Lighting Solutions - Catalogue (EN) (PDF)

Lighting design tools & calculators (HTTP)

Datasheets (HTTP)

High-res images / Technical drawings (HTTP)

Certificate for the Quality Management System of GE Lighting EMEA (PDF)

Certificate for the Environmental Management System of GE Lighting EMEA (PDF)