




GE
Lighting

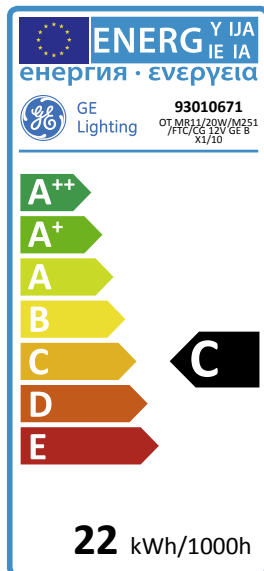

22
kWh/1000h

C
energy class

10
lumens/watt

MR11 - Closed

OT MR11/20W/M251/FTC/CG 12V GE
BX1/10

93010671

Product information

GE's halogen reflector range provides compact, high output light sources with a wide scope for creative lighting.

As with other GE halogen lamps, they combine the advantage of very high light quality, intensity and control with efficient use of energy. Extra compact form, making it ideal where space is at premium.

Application areas



Home



Hospitality

Product data

Cap/Base	GU4
Bulb Shape	Mirrored reflector
Bulb Diameter [mm]	35
Maximum Overall Length [mm]	40
Net weight per piece [g]	20
Gross weight per piece [g]	30
Brand	General Electric (GE)

Performance data

Colour Rendering Index (CRI) [Ra]	100
Nominal correlated colour temperature (CCT) [K]	2800
Nominal beam angle [°]	20
Rated beam angle [°]	20
Nominal center beam candlepower (CBCP) [cd]	1800
Rated peak intensity in [Cd]	1800
Nominal lumens [lm]	205
Rated Lumens [lm]	205
Rated efficacy [lm/W]	10
Energy efficiency class (EEC)	C
Rated Life [h]	4000
Nominal Lifetime [h]	3500
Weighted energy consumption [kWh/1000h]	21.35

Electrical data

Nominal power [W]	20
Rated power [W]	20.0
Nominal lamp voltage [V]	12
Number of switching cycles	16000
Coil type	C-6
Dimming Capability	Yes

Logistic data

DUN Code	10064894501972
EAN Code	0064894501975
Pack Quantity	10
Inner pack type	BOX
Outer pack type	OUTER BOX
Layer quantity	320 EUR, 400 UK
Layer quantity EUR	320
Layer quantity UK	400
Pallet quantity EUR (PC)	4800
Pallet quantity UK (PC)	6000
Outer case size	246 x 100 x 68 (mm)
Product status	Available

Downloads & Links

[Go to the catalog site \(HTTP\)](#)

[Halogen Lamps Spectrum Catalogue \(PDF\)](#)

[Lighting design tools & calculators \(HTTP\)](#)

[High-res images / Technical drawings \(HTTP\)](#)

[Certificate for the Quality Management System of GE Lighting EMEA \(PDF\)](#)

[Certificate for the Environmental Management System of GE Lighting EMEA \(PDF\)](#)