TP-LINK[®]

AC1750 Wireless Dual Band Gigabit ADSL2+ Modem Router Archer D7

• Features:

- Supports 802.11ac The next generation of Wi-Fi
- Simultaneous 2.4GHz 450Mbps and 5GHz 1300Mbps connections for 1.75Gbps of total available bandwidth
- 3 external dual band antennas provide maximum Omni-directional wireless coverage and reliability
- · Full gigabit ports ensure ultrafast data transfer speeds
- Dual USB Ports easily share printers, files or media with your friends or family locally or over the Internet
- Ethernet WAN (EWAN) offers another broadband connectivity option for connecting cable, VDSL or fiber modems
- Guest Network Access provides secure Wi-Fi access for guests sharing your home or office network
- Parental Control allow parents or administrators to establish restricted access policies for children or staff
- IPv6 supported, meeting the demands for the next generation of Internet
- SPI and NAT firewall protects end-user devices from potential attacks from the Internet
- · WPA-PSK/WPA2-PSK encryptions provide user networks with active defense against security threats
- · Easy one-touch WPA wireless security encryption with the WPS button
- · Wi-Fi On/Off Button allows users to turn their wireless radio on or off
- Easy Setup Assistant with multi-language support

• Description:

TP-LINK's Archer D7 AC1750 Wireless Dual Band Gigabit ADSL2+ Modem Router is a combined wired/wireless network connection device with integrated wireless router and ADSL modem, reducing hassle of configuration and saving space.

Coming with the next generation Wi-Fi standard – 802.11ac, 3 times faster than wireless N speeds, Archer D7 delivers a combined wireless data transfer rate of up to 1.75Gbps. With 1300Mbps wireless speeds over the crystal clear 5GHz band and 450Mbps over the 2.4GHz band, the Archer D7 is the superior choice for seamless HD streaming, online gaming and other bandwidth-intensive tasks. Equipped with two multifunctional USB ports, you can share printers, files and media across the local network or the Internet. What's more, Archer D7 features an Ethernet WAN port, which allows for another broadband connectivity technology instead of ADSL to be connected, giving you the flexibility to access the Internet using whichever method is most convenient.



www.tp-link.com

• Specifications:

| HARDWARE FEATURES | |
|------------------------|---|
| Interface | 1 10/100/1000Mbps RJ45 WAN/LAN Port |
| | 3 10/100/1000Mbps RJ45 LAN Ports |
| interface | 1 RJ11 Port |
| | 2 USB 2.0 Ports |
| | 1 Power On/Off Button |
| Button | 1 WPS Button |
| | 1 Wi-Fi On/Off Switch |
| | 1 RESET Button |
| External Power Supply | 12VDC/2.5A |
| Dimensions (W X D X H) | 9.0 x 6.3 x 1.5 in. (229 x 160 x 37mm) |
| IEEE Standards | IEEE 802.3, 802.3u, 802.3ab |
| | Full-rate ANSI T1.413 Issue 2 |
| ADSL Standards | ITU-T G.992.1(G.DMT), ITU-T G.992.2(G.Lite) |
| | ITU-T G.994.1 (G.hs), ITU-T G.995.1 |
| ADSL2 Standards | ITU-T G.992.3 (G.DMT.bis), ITU-T G.992.4 (G.lite.bis) |
| ADSL2 Standards | ITU-T G.992.5 |
| | Three dual band detachable antennas (RP-SMA) |
| Antenna | 3x2 dBi for 2.4GHz and 3x3 dBi for 5GHz |
| WIRELESS FEATURES | |
| Wireless Standards | IEEE 802.11ac/n/a 5GHz |
| | IEEE 802.11n/g/b 2.4GHz |
| | 5 |
| Wireless Speed | 5GHz: up to 1300Mbps |
| F | 2.4GHz: up to 450Mbps |
| Frequency | 2.4GHz and 5GHz |
| EIRP | <20dBm (EIRP) |
| Wireless Function | Enable/Disable Wireless Radio, WDS Bridge, WMM, Wireless Statistics |
| Wireless Security | Support 64/128 bit WEP, WPA /WPA2, WPA-PSK/WPA2-PSK |
| , | Wireless MAC Filtering |
| Wireless Schedule | support 2.4GHz and 5GHz Wireless Schedule |
| SOFTWARE FEATURES | |
| Operation Mode | ADSL Modem Router, Wireless Router |
| ATM/PPP Protocols | ATM Forum UNI3.1/4.0 |
| | PPP over ATM (RFC 2364) |
| | PPP over Ethernet (RFC2516) |
| | IPoA (RFC1577/2225) |
| | MER\IPoE (RFC 1483Routed) |
| | Bridge (RFC 1483Routed) |
| | PVC - Up to 8 PVCs |
| DHCP | Server, Client, DHCP Client List, Address Reservation, DHCP relay |
| Quality of Service | ATM QoS, Traffic Control (IP QoS) |
| Port Forwarding | Virtual server, Port Triggering, UPnP, DMZ, ALG |
| VPN Passthrough | PPTP, L2TP, IPSec Passthrough |
| Dynamic DNS | DynDns, No-IP |
| IPSec VPN | Supports up to 10 IPSec VPN tunnels |
| USB Sharing | Storage Sharing, FTP Server, Media Server, Print Server |
| | 2.4GHz guset network x 1 |
| Guest Network | 5 |


www.tp-link.com

Archer D7

• Specifications:

| Security | NAT Firewall, Access Control, MAC/IP/URL Filtering, Denial of Service (DoS), SYN Flooding, Ping of Death, IP and MAC Address Binding |
|---------------------|---|
| Management | Web Based Configuration(HTTP), Remote management, Command Line Interface, SSL for TR-069, SNMP v1/2c, Web Based Firmware Upgrade, Diagnostic Tools |
| IPv6 | IPv6 and IPv4 dual stack |
| Advanced Features | Parental Control Network Address Translation (NAT); Port Mapping (Grouping), Static Routing, RIP v1/v2 (optional); DNS Relay, DDNS, IGMP V1/V2/V3 |
| OTHERS | |
| Certification | CE, FCC, RCM, RoHS |
| Package Content | AC1750 Wireless Dual Band Gigabit ADSL2+ Modem Router External Splitter RJ-11 Telephone Cable RJ-45 Ethernet Cable Quick Installation Guide Resource CD Power Adapter |
| System Requirements | Windows 8/7/Vista/XP, Mac OS or Linux-based operating system |
| Environment | Operating Temperature: $0 \ C \sim 40 \ C$ (32 $\mathbb{F} \sim 104 \ \mathbb{F}$) Storage Temperature: $-40 \ C \sim 70 \ C$ ($-40 \ \mathbb{F} \sim 158 \ \mathbb{F}$) Operating Humidity: $10\% \sim 90\%$ non-condensing Storage Humidity: $5\% \sim 90\%$ non-condensing |

• Diagram:

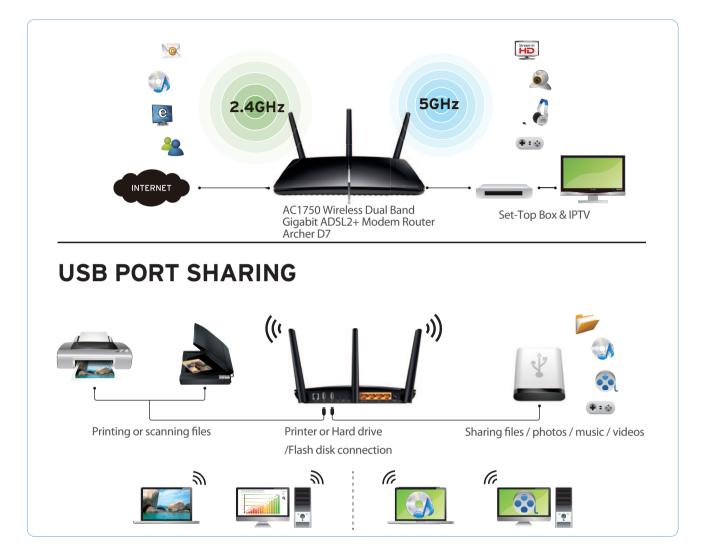

Package:

- AC1750 Wireless Dual Band Gigabit ADSL2+ Modem Router Archer D7
- External splitter (Optional)
- RJ-11 Telephone Cable
- RJ-45 Ethernet Cable
- Power Adapter
- Resource CD
- Quick Installation Guide

Related Products:

- AC1200 Wireless Dual Band USB Adapter Archer T4U
- N900 Wireless Dual Band PCI Express Adapter TL-WDN4800

www.tp-link.com

⁴ Some USB hard drive that works at a high power without using any external power adapter might not be supported.