


Cross Section:

ELECTRONIC TEST:

- 1.OPEN/SHORT/INTERMITTENCE: 100%.
- 2.HD-TV:1080P@60Hz

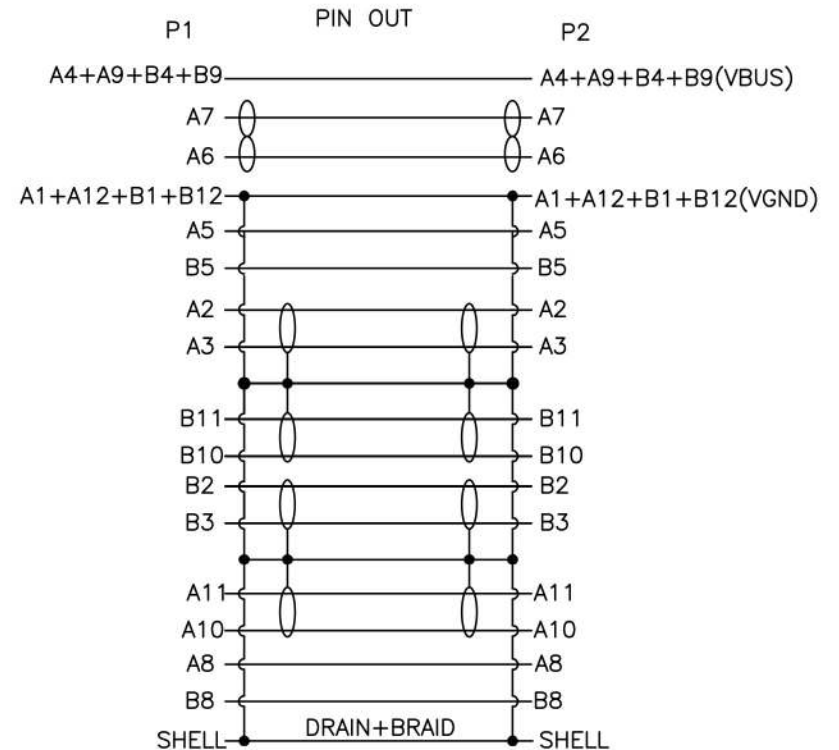

⑨	DUST COVER	P1:DVI 24+1/M;P2:USB3.1 Type-C	2	PCS
⑧	Double-sided copper foil	P1:W30*L120MM;P2:W5*L25MM	2	PCS
⑦	High-temperature Resistant Tape	P1:W20*L120MM;P2:W5*20MM	2	PCS
⑥	OUTER MOLDED	45P BLACK PVC		G
⑤	INNER MOLDED	LD-PE		G
④	THUMB SCREW	#40-40 B-L38 BLACK PVC	1	SET
③	CONNECTOR	USB3.1 TYPE-C/M,Black Insulator,Shell:Gold plated,Contact:Gold plated	1	PCS
②	CONNECTOR	DVI 24+1/M,Black Insulator,Shell:Gold plated,Contact:Gold plated with IC:PS171	1	PCS
①	CABLE	[[ (7/0.08TC)*1P+D(7/0.08TC)+AL+MY]*4C+(7/0.08TC)*1P+(7/0.08TC)*4C+(7/0.16TC)*2C+AB(16/6/0.08TC) BLACK PVC OD:4.5±0.2MM.Cable printing:E***** AWM STYLE 2725 80°C 30V VW-1 SUPER HIGH SPEED USB Revision 3.1	2000	MM
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT

Ltemref	Quantity	Title/Name,designation,material,dimension etc			Article No./Reference	
Designed by	Checked by	Approved by - date	File name	Date	Scale	
		29-05-2019		29-05-2019	FREE	
ANGLE:				Type-C to DVI D 2M		
UNIT:MM				26-2994	Edition 1	Sheet 1/1