

C3W (ezGuard)

## **Dual Sound and Light Protection**

An HD/Full HD Wi-Fi camera with active defense, two-way audio and a durable design for all-weather protection.

### **Key Features**



720p/1080p



Two-way audio. Pickup distance up to 5 meters.



Supports 2.4GHz Wi-Fi (IEEE802.11b, 802.11g, 802.11n)



True Day/Night camera with auto-switching. Infrared night vision up to 30 meters.



IP66 Dustproof and Waterproof



Active Defense



Supports MicroSD card slot Up to 256GB




### Active defense

Upon detection of suspicious activity, the C3W (ezGuard) activates a loud siren and strobe light to scare off intruders.

# Two-way audio

The camera comes with a built-in microphone and HiFi quality speaker, enabling two-way audio via the camera and your phone or tablet.

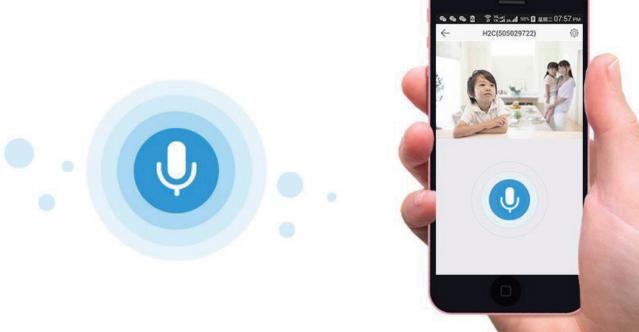

SEZVIZ

## Powerful, dual external antennas

It is equipped with powerful, dual external Wi-Fi antennas, for long-range transmission with strong penetration and anti-interference capabilities.



# Security for all seasons

With an IP66-rated weatherproof design, the C3W (ezGuard) is a reliable and durable guard that can protect you in all types of weather: rain, sunshine or even snow.




# 30m night vision

The integration of efficient infrared lighting, an anti-reflection panel and ICR infrared filter enables excellent night vision up to 30 meters.




# Instant alerts (manual activation required)

The C3W (ezGuard) watches for movement. It will take a picture and send alerts to your smartphone when it detects motions.

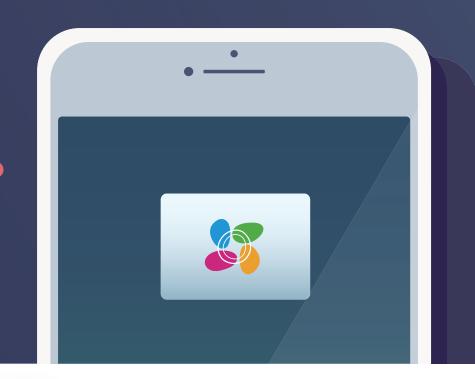

### 360° swivel and base

With a 360°swivel and base, the C3W (ezGuard) is ideal for both ceiling and wall-mounted installations.

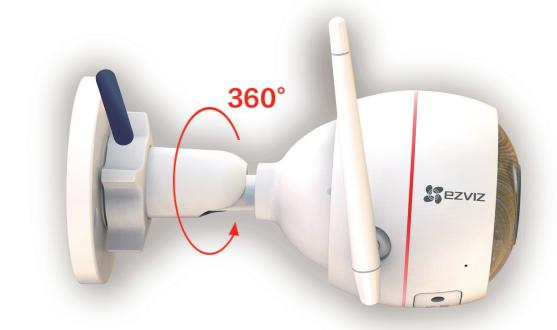

### Specifications Model CS-CV310-A0-1B2WFR/CS-CV310-A0-3B1WFR

#### Camera

Image Sensor 1/2.7" Progressive Scan CMOS/

1/4"Progressive Scan CMOS"

Minimum illumination 0.02 lux @(F2.0, AGC ON), 0 lux with IR

Shutter Speed Self-adaptive shutter

Lens 2.8mm@ F2.2: Horizontal angle: 103°/92°

Diagonal angle: 118°/108°

4mm@ F2.0: Horizontal angle: 87°/72°

Diagonal angle: 104°/86°

6mm@ F2.0: Horizontal angle: 54°/36°

Diagonal angle: 62°/42°

Lens Mount M12

Day & Night IR-cut filter

DNR 3D DNR

WDR Digital WDR

### Compression

Video Compression H.264

H.264 Type Main Profile

Video Bit Rate HD; Standard; Basic; Adaptive bit rate

### Wi-Fi

Standard IEEE802.11 b/g/n

Frequency Range 2.4GHz ~ 2.4835 GHz

Channel Bandwidth Supports 20MHz

Security 64/128-bit WEP, WPA/WPA2, WPA-PSK/WPA2-PSK

Transmission Rate 11b: 11Mbps, 11g: 54Mbps, 11n: 150Mbps

#### Network

Storage Supports MicroSD card (max. 256GB)

Smart Alarm Intelligent motion detection

Wi-Fi Pairing AP paring

Protocol EZVIZ Cloud proprietary protocol

Interface Protocol EZVIZ Cloud proprietary protocol

General Features Anti-Flicker, Dual-Stream, Heartbeat Messages, Mirror

Image, Password Protection, Watermark

Communication Interface RJ45 10M/100M self-adaptive Ethernet port\*1

Minimum Network Requirements

2Mbps

### **Image**

Max. Resolution 1920×1080 / 1280×720

BLC Support

#### General

Power Supply DC 12V±10%
Power Consumption Max. 6W

IP Grade IP66

IR Range MAX. 30meters

Product Dimensions 150.44 mm x 85.80 mm x 71.64 mm

Packaging Dimensions 252 mm x 110 mm x 92 mm

Weight 326g

## Package Contents:

- C3W (ezGuard) X 1
- Power Adapter with 1.5 Meters Power Cable X 1
- Mounting Template X 1
- Screw Kit X 1
- Waterproof Kit X 1
- Quick Start Guide X

### Certificates

FCC / UL / IC / NOM / CE / RoHS / WEEE / REACH

## Requirements

- Operating Conditions: -30°C ~ 60°C, Humidity 95% or less (non-condensing)