

300Mbps Wireless N PCI Express Adapter

N300 Desktop Wi-Fi with Proven 300Mbps Wi-Fi Reliablity










Highlights


N300 Stability for Your Daily Needs

With 2×2 MIMO for more efficient data transfer, the TL-WN881ND reaches Wi-Fi speeds of up to 300Mbps, ideal for streaming, gaming and internet calls.

Extra Low-Profile Bracket for Better Compatibility

The extra low-profile bracket provided allows for installation in slim desktop towers through the changing of the bracket.

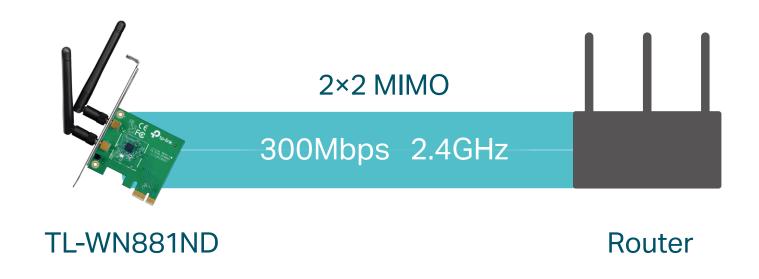

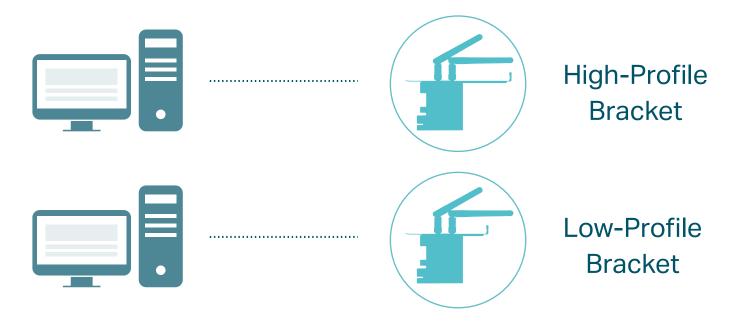

Features



· Fast Wi-Fi – Up to 300Mbps Wi-Fi speed for joyful surfing experience



Wi-Fi Range

 Better Coverage – Two detachable antennas provide wider wireless coverage, delivering a stable connection to your Wi-Fi network



Reliability

- 2X2 MIMO Establishes simultaneous connections, providing more stable connections and expansive coverage
- · Roaming Technology Guarantees efficient and reliable client wireless connections



- Easy Installation Simply insert the adapter into a free PCI-E slot in your desktop and connect to an available Wi-Fi network
- System Compatibility Supported operating systems include Windows 10/8.1/8/7, Linux Kernel 3.11 ~ 4.3.15



Security

· Encryptions for Secure Network – WPA/WPA2 encryptions provide active protection against security threats

Specifications

Wireless

· Wireless Standard: IEEE 802.11b/g/n

· Frequency: 2.4-2.4835GHz

· Signal Rate: 300Mbps at 2.4GHz

· Wireless Mode: Ad-Hoc/Infrastructure Mode

· Wireless Security: WEP, WPA/WPA2, WPA-PSK/WPA2-PSK

· Modulation Technology: DBPSK, DQPSK, CCK, OFDM, 16-QAM, 64-QAM

Hardware

· Interface: PCI Express

· Antenna: 2 Detachable External Antennas

· LED: Status

• Dimensions: 4.8 × 3.1 × 0.8 in. (120.8 × 78.5 × 21.5 mm)

Others

· Package Contents

300Mbps Wireless N PCI Express Adapter TL-WN881ND

Low-Profile Bracket

Quick Installation Guide

Resource CD

· Certification

FCC, CE, RoHS

· System Requirements

Windows10/8.1/8/7, Linux

Environment

Operating Temperature: $0^{\circ}\text{C} \sim 40^{\circ}\text{C}$ (32°F ~104°F)

Storage Temperature: -40°C~70°C (-40°F ~158°F)

Operating Humidity: 10%~90% non-condensing

Storage Humidity: 5%~90% non-condensing





For more information, please visit

http://www.tp-link.com/en/products/details/?model=TL-WN881ND

Specifications are subject to change without notice. TP-Link Technologies Co., Ltd. Other brands and product names are trademarks of their respective holders. Copyright ©2017 TP-Link Technologies Co., Ltd. All rights reserved.

www.tp-link.com