

Display any content in ultra-high definition with incredibly rich color on slim, efficient signage.

SHOP NOW

Through intelligent UHD upscaling technology, Samsung's QBR series performs edge restoration and noise reduction to deliver UHD picture quality even with lower resolution content. Backed by Tizen 4.0, the QBR series also provides reinforced capability with multiple web formats and secured protection. Additionally, its new slim design simplifies wall mounting and ensures seamless installation.

Highlights

WILL ATTACK

..........


- Engage customers with lifelike images through ultra high-definition resolution
- Deliver UHD-level picture quality even with lower resolution content through innovative UHD upscaling technology and unique picture-enhancing features
- Dynamic Crystal Color allows viewers to enjoy a wider spectrum of colors, up to one billion shades
- New symmetrical, slim design simplifies installation and complements any environment.
- Secure, PC-free operation through Knox and rigid three-layer protection

SAMSUNG


Industry trend

With visual display technology improving across devices, viewers have developed an ever-growing expectation for better picture quality. Additionally, the market has been flooded with a wide variety of color techologies and it's becoming increasingly important for businesses to have rich and vivid display capabilities. As UHD resolution continues to grow in popularity, it is essential for businesses to deliver superb picture quality for their customers. Low quality displays and signage can create negative perceptions of a business. While much content is still being produced at a lower resolution, through Intelligent UHD upscaling technology, Samsung's QBR series is able to upscale the low resolution content to UHD picture quality standards.

UHD resolution is must-have feature in the future

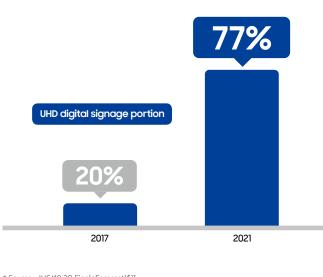

UHD sales forecasted to exceed FHD in 2019

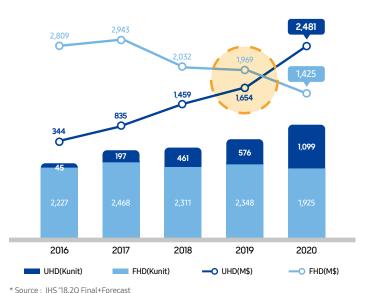

* Source : IHS '18.2Q Final+Forecast(\$)]

Consumer TVs, along with Commercial Lite and Hospitality TVs used for signage are excluded.

Why Samsung's QBR series?

Samsung's superior visual display technology has positioned them as the industry leader in the digital signage market for a decade¹ and Samsung brand having been No.1 in sales for12 consecutive years in TV by IHS Markit². As an expert in picture quality in the display industry, Samsung is able to deliver best-in-class picture quality through their new QBR series. The signage provides rich and flawless colors, sleek and durable design, powerful performance through SSSP 6 and secured protection. Samsung's QBR series is also able to upscale the low resolution content to UHD picture quality. For commercial displays, this technology advancement means highly visible signage with unmatched accuracy to help capture the attention of potential customers. It also means savings both in cost and time for businesses who can produce content more inexpensively at a lower resolution and still display it in stunning UHD quality.

1 Results based on IHS Technology report "Public Displays Market Tracker", 2009 – 2018.

Information is not an endorsement of Samsung. Any reliance on these results is at the third party's own risk.

2 Results based on IHS Markit, Technology Group, TV Sets Intelligence Service – Premium, Annual Unit and Annual Revenue Basis, 2006 – 2017.

Information is not an endorsement of Samsung. Any reliance on these results is at the third party's own risk. Visit www.technology.ihs.com for more details.









^{*} Note : Standalone digital signage only

Key features



Incredible 4K picture quality

Samsung's new QBR series is able to capture customer attention by providing an incredibly clear picture, showcasing lifelike images and intricate details better than ever before thanks to ultra high-definition 4K resolution.



Intelligent UHD upscaling

UHD Processor

Samsung's global leadership in display technology and picture quality spans more than a decade. Thanks to superior semi-conductor technology, Samsung has developed the powerful video processor available. Additionally, intelligent UHD upscaling technology is a cutting-edge solution based on Samsung's proprietary UHD Processor that allows content developed at a lower resolution to be elevated to UHD-level quality. It also performs edge restoration and noise reduction to optimize on-screen text and imagery with crisp edges and fine detail.

Noise Reduction



Dynamic Crystal Color

Dynamic Crystal Color is what brings the incredible, lifelike color to Samsung displays. Using 10-bit processing, the displays are able to showcase a wider spectrum of colors — up to a billion different shades — capturing subtle differences for flawless color expression, critical to businesses in ensuring brand consistency across communication channels. The QBR series also features HDR+ functionality that converts standard definition (SDR) content to HDR quality for sharper contrast and more vivid colors.

Edge Restoration

Key features





Slim and symmetrical design

The all-new slim and symmetrical design of the QBR series significantly simplifies wall mounting the display and ensures installation is a seamless process. The display's power inlet direction has been redesigned to sit flush against the wall. The new design sets guarantees a long life cycle ensuring the QBR series will stand the test of time.



Clean cable management

In a corporate or retail environment, the back of a display is often visible to customers. With the QBR series' new cable guide feature retailers can tuck messy cables away from view. This allows for a clean and more visually-appealing customer shopping experience.





The Samsung SMART Signage Platform (SSSP) is an open-source, all-in-one solution embedded in Samsung SMART signage that simplifies installation and maintenance. With SSSP, there is no need for any external devices to communicate with the server or play digital media enjoying easy development, reinforced capability with multiple web formats, and secured protection.



Wi-Fi and Bluetooth built-in

The QBR series features a nearly endless range of business use-cases thanks to built-in Wi-Fi and Bluetooth. Wireless connectivity allows for personalized and interactive services including enabling integration with beacon technology in store, while also simplifying how businesses showcase content.

* Image is for illustrative purposes only, specific application or program may have to be developed for the depicted usage scenario.

Specifications

Note Note A B A B A Not	Model		QB43R	QB49R	QB55R	QB65R	QB75R	
Notation		Diagonal Size		43	49	55	65	75
NumbiStatisticStatisticStatisticStatisticStatisticStatisticStatisticNumbiNumbiStatisticStatisticStatisticStatisticStatisticStatisticNumbiNumbiStatisticStatisticStatisticStatisticStatisticStatisticNumbiStatisticStatisticStatisticStatisticStatisticStatisticStatisticNumbiStatisticStatisticStatisticStatisticStatisticStatisticStatisticNumbiStatisticStatisticStatisticStatisticStatisticStatisticStatisticNumbiStatisticStatisticStatisticStatisticStatisticStatisticStatisticNumbiStatisticStatisticStatisticStatisticStatisticStatisticStatisticNumbiStatisticStatisticStatisticStatisticStatisticStatisticStatisticNumbiStatisticStatisticStatisticStatisticStatisticStatisticStatisticNumbiStatisticStatisticStatisticStatisticStatisticStatisticStatisticNumbiStatisticStatisticStatisticStatisticStatisticStatisticStatisticNumbiStatisticStatisticStatisticStatisticStatisticStatisticStatisticNumbiStatisticStatisticStatisticStatisticStatistic		Diagonal Size	Measured	42.5	48.5	54.6	64.5	74.5
Head Head <t< td=""><td>Туре</td><td></td><td>Edge LED BLU</td><td>Edge LED BLU</td><td>Edge LED BLU</td><td>Edge LED BLU</td><td>Edge LED BLU</td></t<>		Туре		Edge LED BLU	Edge LED BLU	Edge LED BLU	Edge LED BLU	Edge LED BLU
<table-container> Headsoft Headsoft Table-land Table-land Table-land State State State Headsoft -</table-container>		Resolution		UHD (3840 x 2160)	UHD (3840 x 2160)	UHD (3840 x 2160)	UHD (3840 x 2160)	UHD (3840 x 2160)
Head Head <t< td=""><td></td><td></td><td>0.2451 x 0.2451</td><td>0.093 x 0.279</td><td>0.105 x 0.315</td><td></td><td>0.42975 x 0.42975</td></t<>				0.2451 x 0.2451	0.093 x 0.279	0.105 x 0.315		0.42975 x 0.42975
NMM Quarteristics Quarteristics <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>								
Name Name Name Name Name Name Name Register No No No No No No No No No No No No No No No No No No No No No <td>Panel</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>	Panel							
Image Image <t< td=""><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></t<>								
Name Nome Nome Nome Nome Nome Nome Nome Nome Nome Nome Nome Nome Nome Nome Nome Nome Nome Nome Nome <td></td> <td></td> <td>G)</td> <td></td> <td></td> <td></td> <td></td> <td></td>			G)					
Image Image <t< td=""><td></td><td></td><td>0)</td><td></td><td></td><td></td><td></td><td></td></t<>			0)					
Network Mode Math								
<table-container> Hear <t< td=""><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></t<></table-container>								
Haming interaction No No Horizo		Haze		2%	2%	2%	2%	2%
Name Partial state Part of the state Part of		Dynamic C/R		MEGA	MEGA	MEGA	MEGA	MEGA
Maxman in service Md - 2xd2	Display	H-Scanning Frequen	су	30 ~ 81kHZ	30 ~ 81kHZ	30 ~ 81kHZ	30 ~ 81kHZ	30 ~ 81kHZ
Select Selec	bispility		-					
Non- Non-			uency					
Angle	Sound	SpeakerType	DCD					
Infraction Infraction <thinfraction< th=""> Infraction Infracti</thinfraction<>								
nerview (mathematical) nerview (mathematical) nerview (mathematical) See Minical (MIO) See Minical								
ProblemProbabilityAdd/Correni <td></td> <td>INPUT</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>		INPUT						
MarketMAMAMAMAMAMAMITHMAMAMAMAMAMAMITHMAMAMAMAMAMAAMAMAMAMAMAMAAMAMAMAMAMAMAAMAMAMAMAMAMAAMAMAMAMAMAMAAMAMAMAMAMAMAAMAMAMAMAMAMAAMA				Audio(Common)	Audio(Common)	Audio(Common)	Audio(Common)	Audio(Common)
Math Math <t< td=""><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></t<>								
NUMU MUMU MUMU Second status Sec	Connectivity							
Image: Process of the state of the								
Image: state		001101						
<table-container> DETEND SE3205(a) <th< td=""><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></th<></table-container>								
DTEMPAGENCY No. No. No. No. pipe - J NA NA NA NA pipe - J No. No. No. No. pipe - J No. No. No. No. pipe - J No. No. No. No. pipe - J No. No. No. No. No. pipe - J No. No. No. No. No. No. No.		EXTERNAL CONTROL						
Image: Part of the stand		EXTERNAL SENSOR			IR		IR	IR
Participant K000-000+-(-10) K000-200+-(-10) K000-200(-10) K000-200(-1		Tuner		N/A	N/A	N/A	N/A	N/A
Part Part Part Part Part Part Part Part		Туре		Internal	Internal	Internal	Internal	Internal
Parter Indefinition Indefinition Indefinition Indefinition Indefinition Indefinition Indefinition Network Indefinition Inde		Power Supply		AC100 - 240 V~ (+/-10 %), 50/60 Hz	AC100 - 240 V~ (+/-10 %), 50/60 Hz	AC100 - 240 V~ (+/-10 %), 50/60 Hz	AC100 - 240 V~ (+/-10 %), 50/60 Hz	AC100 - 240 V~ (+/-10 %), 50/60 Hz
Priori Benging Marging								
Pear Consumption Product manual Product Product P	Power							
Image: second	1000	Power Consumption						
Image: state in the								
Prescontion Set (95) 9955 x 527 x 48.3 (95) 10927 x 415 x 43.3 (92) 125 x 100 x 43.3 (92) 155 x 100 x 43.3 (92) 157 x 100 x 1000 x 100 x 1000 x 100 x 100 x 100 x 1000 x 100 x 100 x 100 x 100								
Detectories Description Description <thdescription< th=""> <thdescription< th=""></thdescription<></thdescription<>								
Nexter Notice Note 10 135 181 226 333 9 VEX.Nexter 100 103 18 226 333 9 Note 100 2001200 2001200 4001400 4001400 4001400 Note NA NA NA NA NA NA NA Description For Stand Diption For Stand Diption 92mmULUR,112mm8 92mmULR,112mm8 92mmULR,112mm8 92mmULR,112mm8		Dimension(mm)						
Methods Methods T33 18 2.2.5 3.3.3 09 VerSN beam VerSN beam NA NA NA NA NA Protection Gas NA NA NA NA NA NA Beam VerSN beam Protection Gas Protection Gas NA NA NA NA Beam VerSN beam Protection Gas			-					
Protection Glass NA NA NA NA NA NA NA Sand Type Fed Sand Qipticul Fed Sand Qipticul Fed Sand Qipticul No No No Operation Quereing Temperature 0"C-40°C	Mechanical	Weight (kg)	Package	13.3	18	23.6	33.3	49
Space Type Feed Stand Diptional) Feed Stand Diptional) Feed Stand Diptional) Feed Stand Diptional) Peed Stand Diptional) No No Operation Maintifyie - 0.9 <td>Spec</td> <td colspan="2">VESA Mount</td> <td>200 X 200</td> <td>200 X 200</td> <td>200 X 200</td> <td>400 X 400</td> <td>400 X 400</td>	Spec	VESA Mount		200 X 200	200 X 200	200 X 200	400 X 400	400 X 400
BestWein Tige Streem Space UUU (R) 12 mm(3) Space UUU (R) 12 mm(3) <td></td> <td colspan="2">Protection Glass</td> <td>N/A</td> <td></td> <td>N/A</td> <td>N/A</td> <td>N/A</td>		Protection Glass		N/A		N/A	N/A	N/A
$ \begin{array}{ $								
Operation Humidity View 10-80% 10-8								
kg/ kg/ Vibr Signage Display Bailt in Magicine S5, SSP 0.0 Bailt in Magicin SSP 0.0 Bailt in Magicin SSP 0.0 Bailt in Magicine S5	Operation		ure					
Key Similal joint Signage with Built Maginito Signage with Maginito Signage with Built Maginito Signage with Built Magini Signage with Built Maginito Signage with Built Magini Signage w		Humidity						
Feature HW Temperature Sensor/You Diplay, Cock Enter relations Sensor/You Diplay, Diversitions Sensor/You Diplay, Cock Enter relations School/You Diplay, Diversitions Sensor/You Diplay, Cock Enter relations School/You Diplay, Diversitions School/You Diplay, Cock Enter relations School/You Diplay, Cock Enter relation S		Key		Slim & Light Signage with	Slim & Light Signage with	Slim & Light Signage with	Slim & Light Signage with	Slim & Light Signage with
Preture Hvv Clock Battery/RBIN: Clock Keeping, UP Fright								
Special Image: specia			H/W	Clock Battery(168hrs Clock Keeping),	Clock Battery (168hrs Clock Keeping),	Clock Battery(168hrs Clock Keeping),	Clock Battery (168hrs Clock Keeping),	Clock Battery (168hrs Clock Keeping),
Feature S/W LCP Dimone UL Button Tack, Hote Way, option, PUg3RPM Unitial Setting) option, PUg3RPM Uniting Se	Feature	Special						
Feature Image: Control Program Control Program Option, Program Option			S/W					
Peakure On-Chip Cache Cache Memory Lilinstruction Cache : 48/8 Li Data Cache : 32/8 Li Data Cache :							option, Plug&Play (Initial Setting)	
Feature Heat Part Feature Heat Part Feature Heat Part Part Part Part Part Part Part Pa								
Feature Feature								
Feature Main Memory Interface Main Sector Main Memory Interface Main Sector Main Memory Interface Main Sector Main Sector Main Sector Main Sector Sector Se			Memory	L2 Cache : 2MB	L2 Cache : 2MB	L2 Cache : 2MB	L2 Cache : 2MB	L2 Cache : 2MB
ker Marmory Interface 25GB 25GB 25GB 12DDR415GH264bit 12DDR415GH26H26H26H26H26H26H26H26H26H26H26H26H26H				1.7GHz	1.7GHz	1.7GHz	1.7GHz	1.7GHz
InterfaceLPDUR4 LSM2 24010LPDUR4 LSM2 24010LSM2 24010L								
Internal Player (Embedded H/W) Graphics Output resolution: 3340x2160 (Scale up from graphic processing result) BGB (3.88GB Occupied by O/S, 4.12GB Available) SGB (3.88GB Occupied by O/S, 4.12GB Available)								
Image: constraint of the			Graphics					
Image: here [FDM] 4.12GB Available] 4.12GB Ava				up from graphic processing result.)	up from graphic processing result.)	up from graphic processing result.)	up from graphic processing result.)	up from graphic processing result.)
Image: series Multimedia *Video Decoder :MPEG-1/2/, H263, H264/AVC, UHD H264/AVC, VC-1, AVS, HEVC, JEEG, PNG, VP8, VP9 *Au- dio Decoder :AC3 (DD), MPEG *Video Decoder :MPEG-1/2/, H263, H264/AVC, UHD H264/AVC, VC-1, AVS, HEVC, JEEG, PNG, VP8, VP9 *Au- dio Decoder :AC3 (DD), MPEG *Video Decoder :MPEG-1/2/, H263, H264/AVC, UHD H264/AVC, VC-1, AVS, HEVC, JEEG, PNG, VP8, VP9 *Au- dio Decoder :AC3 (DD), MPEG *Video Decoder :MPEG-1/2/, H263, H264/AVC, UHD H264/AVC, VC-1, AVS, HEVC, JEEG, PNG, VP8, VP9 *Au- dio Decoder :AC3 (DD), MPEG *Video Decoder :MPEG-1/2/, H263, H264/AVC, UHD H264/AVC, VC-1, AVS, HEVC, JEEG, PNG, VP8, VP9 *Au- dio Decoder :AC3 (DD), MPEG *Video Decoder :MPEG-1/2/, H263, H264/AVC, UHD H264/AVC, VC-1, AVS, HEVC, JEEG, PNG, VP8, VP9 *Au- dio Decoder :AC3 (DD), MPEG *Video Decoder :MPEG-1/2/, H263, H264/AVC, UHD H264/AVC, VC-1, AVS, HEVC, JEEG, PNG, VP8, VP9 *Au- dio Decoder :AC3 (DD), MPEG *Video Decoder :MPEG-1/2/, H263, H264/AVC, UHD H264/AVC, VC-1, AVS, HEVC, JEEG, PNG, VP8, VP9 *Au- dio Decoder :AC3 (DD), MPEG *Video Decoder :MPEG-1/2/, H263, H264/AVC, UHD H264/AVC, VC-1, AVS, HEVC, JEEG, PNG, VP8, VP9 *Au- dio Decoder :AC3 (DD), MPEG *Video Decoder :MPEG-1/2/, H263, H264/AVC, UHD H264/AVC, VC-1, AVS, HEVC, JEEG, PNG, VP8, VP9 *Au- dio Decoder :AC3 (DD), MPEG *Video Decoder :MPEG-1/2/, H263, H264/AVC, UHD H264/AVC, VC-1, AVS, HEVC, JEEG, PNG, VP8, VP9 *Au- dio Decoder :AC3 (DD), MPEG *Video Decoder :MPEG-1/2/, H263, H264/AVC, UHD H264/AVC, VC-1, AVS, HEVC, JEEG, PNG, VP8, VP9 *Au- dio Decoder :AC3 (DD), MPEG *Video Decoder :MPEG-1/2/, H263, H264/AVC, UHD H264/AVC, VC-1, AVS, HEVC, JEEG, PNG, VP8, VP9 *Au- dio Decoder :AC3 (DD), MPEG *Video Decoder :AC3 (DD), MPEG *Video Decoder :AC3 (DD), MPEG								
Avs+, HEVC, JPEG, PNG, VPB, ViPP 4, dio Decoder: AC3 (DD), MPEG ido Decoder: AC3 (DD), MPEG				*Video Decoder : MPEG-1/2/4, H.263,	*Video Decoder : MPEG-1/2/4, H.263,	*Video Decoder : MPEG-1/2/4, H.263,	*Video Decoder : MPEG-1/2/4, H.263,	*Video Decoder : MPEG-1/2/4, H.263,
Image: Problem in the system in th			Multimedia					
Image: systemImage: systemImage			10.5	dio Decoder : AC3 (DD), MPEG	dio Decoder : AC3 (DD), MPEG	dio Decoder : AC3 (DD), MPEG	dio Decoder : AC3 (DD), MPEG	dio Decoder : AC3 (DD), MPEG
System Tigen 4.0 (VDLINDX) Tigen 4.0 (VDLINDX) Tigen 4.0 (VDLINDX) Tigen 4.0 (VDLINDX) Accession Safety 60950-1 60950-1 60950-1 60950-1 60950-1 EMC EMC Glass B Glass B Glass B Glass B Glass B Glass B ENERGY STAR 70 (USA), Epeat ENERGY STAR 70 (USA) PowerCord, Remote Controller, Batteries No No No No Apptional Mount				USB 2.0	USB 2.0	USB 2.0	USB 2.0	USB 2.0
$ \begin{array}{c c c c c c } \hline Safety & \hline titmed line line line line line line line line$				Tizen 4.0 (VDLinux)	Tizen 4.0 (VDLinux)	Tizen 4.0 (VDLinux)	Tizen 4.0 (VDLinux)	Tizen 4.0 (VDLinux)
Environment ENERGY STAR 7.0 (USA) ENERGY STAR 7.0 (USA) ENERGY STAR 7.0 (USA), Epeat Quick Setup Guide, Warranty Card, Power Cord, Remote Controller, Batteries Energy Star 7.0 (USA), Epeat Quick Setup Guide, Warranty Card, Power Cord, Remote Controller, Batteries Energy Star 7.0 (USA), Epeat Quick Setup Guide, Warranty Card, Power Cord, Remote Controller, Batteries Star 7.0 (USA) Quick Setup Guide, Warranty Card, Power Cord, Remote Controller, Batteries Quick Setup Guide, Warranty Card, Power Cord, Remote Controller, Batteries Quick Setup Guide, Warranty Card, Power Cord, Remote Controller, Batteries Quick Setup Guide, Warranty Card, Power Cord, Remote Controller, Batteries Quick Setup Guide, Warranty Card, Power Cord, Remote Controller, Batteries <t< td=""><td></td><td>Safety</td><td></td><td>60950-1</td><td>60950-1</td><td>60950-1</td><td>60950-1</td><td>60950-1</td></t<>		Safety		60950-1	60950-1	60950-1	60950-1	60950-1
Included Quick Setup Guide, Warranty Card, Power Cord, Remote Controller, Batteries Accessioning Mount WMN40705E WMN40705E WMN40705E WMN40705E Specialty CML400XK CML400XK CML450X CML450X CML450X	Certification	EMC		Class B	Class B	Class B	Class B	Class B
Included Power Cord, Remote Controller, Batteries Power Cord, Remote Controler, Batteries Power Cord, Remote Control		Environment						
Accessories Mount Étatteries Batteries Description		Included						
Accessories Mount WMN4070SE WMN4070SE WMN4070SE WMN4277SE WMN4277SE Specialty CML400XK CML400XK CML400XK CML450K CML450K		maada						
Mount Mount WMIN4070SE WMIN4070SE WMIN4070SE WMIN4277SE WMIN4277SE Specialty CML400XK CML400XK CML450K CML450K	Accessories		Stand	STN-L4355F	STN-L4355F	STN-L4355F	No	
Specialty CML400XK CML400XK CML450K CML450K	10005001105	Optional	Mount	WMN4070SE	WMN4070SE	WMN4070SE	WMN4277SE	
Media Player N/A N/A N/A N/A			Specialty	CML400XK	CML400XK	CML400XK	CML450K	
			Media Player	N/A	N/A	N/A	N/A	N/A

About Samsung Electronics Co., Ltd.

Samsung Electronics Co., Ltd. inspires the world and shapes the future with transformative ideas and technologies. The company is redefining the worlds of TVs, smartphones, wearable devices, tablets, cameras, digital appliances, medical equipment, network systems, and semiconductor and LED solutions. For the latest news, please visit the Samsung Newsroom at news.samsung.com.

SMART Signage

For more information about Samsung SMART Signage QBR Series Displays, visit www.samsung.com/business or www.samsung.com/displaysolutions

Copyright © 2019 Samsung Electronics Co. Ltd. All rights reserved. Samsung is a registered trademark of Samsung Electronics Co. Ltd. Specifications and designs are subject to change without notice. Non-metric weights and measurements are approximate. All data were deemed correct at time of creation. Samsung is not liable for errors or omissions. All brand, product, service names and logos are trademarks and/or registered trademarks of their respective owners and are hereby recognized and acknowledged.

Samsung Electronics Co., Ltd. 416, Maetan 3-dong, Yeongtong-gu, Suwon-si, Gyeonggi-do 443-772, Korea

2019-03

SAMSUNG