


HANNING

HX194DPB | US/EU

48.3cm / 19" Diagonal LED Monitor



- LED Backlight Monitor
- 1280 x 1024 SXGA Resolution
- 80,000,000:1 Active Contrast
- 5ms Response Time
- VGA + DVI (HDCP) Inputs
- Built-In Stereo Speakers
- Low Power Consumption
- Multi-Video Modes : PC / Movie / Game / ECO
- Tilt and Wall-Mountable (VESA)
- ECO Friendly

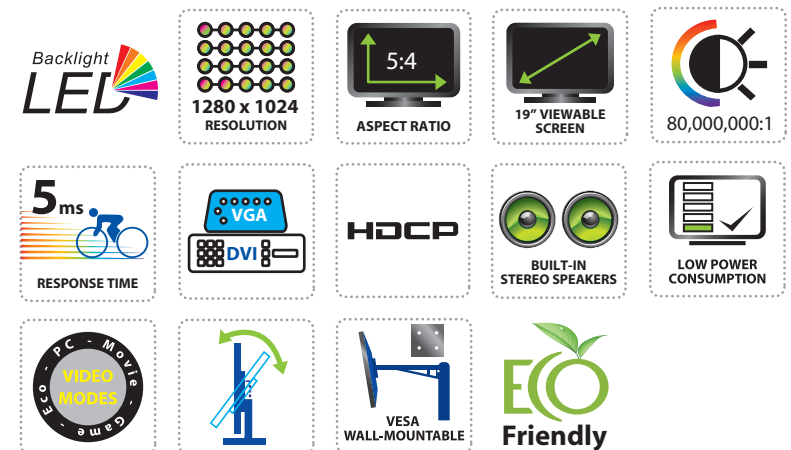

HX194DPB

US/EU

48.3cm / 19" Diagonal White LED-Backlight

HANNSPREE

| | | |
|---|----------------------------|--|
| LCD Panel | Display size | 48.3cm / 19" Diagonal White LED-Backlight |
| | Brightness | 250cd/m2 (Typical) |
| | Contrast | 1000:1 (Typical) 80,000,000:1 (Active Contrast) |
| | Pixel pitch | 0.294(H) x 0.294(V) |
| | Resolution (H x V) | 1280 x 1024 |
| | Aspect Ratio | 5: 4 |
| | Response time | 5ms |
| | View angles LR,UD | H/V 170°/160° |
| | Color | WARM,NATURE,COOL, User Mode |
| | Panel surface | Anti-glare |
| | Display colors | 16.7M Colors |
| | PC Input Range | Horizontal Freq. |
| Vertical Freq. | | 56Hz to 75Hz |
| Max. display frequency (Resolution H*V/Fv) | | 1280 x 1024 /75 Hz |
| Interface | Input | D-Sub x 1, DVI-D (HDCP)x1, Audio x 1 |
| Output Terminal | Earphone | N/A |
| | Speaker | 1Wx2 |
| Power | Consumption | On: 23 W; Standby<=0.5W, Off<=0.5W |
| | AC Power Range | AC 100 - 240V, 50 - 60Hz |
| | Power Mode Indicator Light | Power on : Green (LED) Power saving : Orange(LED) |
| Operating Condition | Temperature | 0°C ~ 40°C |
| | Humidity | 20% ~ 85%, non-condensing |
| Physical | Dimension (W*D*H) | 407.09 x 178 x 406.93mm |
| | Packing Dimension (W*D*H) | 460 x 118x 472mm |
| | Net weight | 3.0±0.2Kg |
| | Gross weight | 4.1±0.2Kg |
| | Tilt | 0°~ 20° |

| | | |
|------------------------------|--|---|
| Physical | Kensington Lock | Yes |
| | VESA mounting | 100 x 100mm |
| Controls | Front control | MENU ^ / * v i / E ⏻ |
| | On Screen Display | 12 language : EN, TC, DE, FR, ES, IT, PT, NL, SC, JS, KR, Russian |
| | Preset Mode | PC, Movie, Game, ECO Modes |
| Container Loading | 40'Standard / 20' Standard | EU: 1920 / 960 |
| | 40'(HQ) / 20' Standard | US: 2100/800 |
| Accessories | Power Cable(1.5m), VGA Cable(1.5m), Audio Cable(1.5m), User Manual (CD), Quick Start Guide (Paper) | |
| Color Plan | All black texture | |
| Carton box | Brown carton | |
| Green product (Jan. 2009) | Yes | |
| Window 8 | N/A | |
| Others | PC99 function(must) | |
| Certification | CE, CB, Nemko GS, TCO 6.0, EPA 6.0, FCC, UL or NRTL | |

Contact Information

Actual products may differ slightly from those illustrated on this promotion material. Please refer to actual samples for final selection. The products displayed on this promotion material may not be available for purchase in your particular country or locality. Please check with your local Hannspree authorized representatives for the availability of specific products in your area. Hannspree reserves the right to alter design and specifications as well as to change the accessories with equivalents without notice.