

Samsung OMD Series SMART Signage

Experience brilliant semi-outdoor signage with high visibility and simplified connections



Highlights

- Attract and engage audiences with superior visibility and high brightness in 2,500-nit, 5,000:1 contrast ratio LED displays.
- Cut operating costs with energy-efficient technology even with high brightness, using an Auto Brightness sensor and customizable brightness range.
- Install easily and operate remotely with 2nd Generation SSSP powered by built-in Wi-Fi.
- Display and manage content readily with MagicInfo mobile and server solution.
- Gain flexibility with a choice of kit-type or complete-product configurations.

Brighten in-window displays efficiently with proven LED BLU technology

Businesses need new strategies with lower total cost of operation (TCO) to attract customers' attention and convey information. When adopting in-window digital signage as a strategy, businesses need high brightness and visibility, along with digital merchandising and advertising content management. They also need easy installation with built-in Wi-Fi for remote, wireless control, collaboration with housing SI for mounting compatibility and the versatility of either a complete product or kit-type product.

Samsung OMD Series displays build on the success of Samsung in-window CCFL displays, with proven LED BLU technology that delivers even more efficiency to enliven business messaging.

OMD Series displays are brighter while reducing power consumption at

2,500 nit using 315 W compared to the SL46B at 1,500 nit using 356 W thus offering ultimate outdoor visibility at a great value.



Conventional at 1,500 nit
Using 356 W



OM46D at 2,500 nit
Using 220 W

Figure 1. Great advantages in energy savings

OMD Series displays deliver performance, quality and reliability for in-window displays. With innovative Samsung technology, the displays can outshine bright sunlight with 2,500 nit brightness, and automatic brightness control delivers optimal visibility in various lighting environments.

Wired and wireless connectivity, along with powerful remote system control through a mobile app, enables centralized, cable-free content management and device control. And the System-on-Chip (SoC) media player embedded within the in-window digital signage simplifies content management and provides a clutter-free configuration.

The displays are available in two configurations to suit the needs of any display environment. OMD-K displays are kit-type displays that can fit into customized housings to address a wide range of design and environmental requirements. OMD-W displays are standalone units with an aesthetic design and back cover.

Elevate business messaging with bright and visually appealing displays

Combine high brightness and low energy consumption for ideal digital messaging

With 2,500-nit brightness that outshines other in-window displays, OMD Series displays achieve an optimal blend of excellent visibility and brightness. As internal Samsung testing revealed, the displays are one of the brightest products on the market, with an obvious advantage in illumination.

OMD Series displays with LED backlight technology, emits less carbon dioxide (CO₂) compared with conventional cold cathode fluorescent lamp (CCFL) display, while lower power consumption.

Deliver high visibility in a bright, attractive display

Transitioning from CCFL to LED technology provides significant energy-saving advantages. An auto brightness sensor — another great feature for energy saving and panel life cycle extension — optimizes energy consumption by adjusting the display for optimal brightness in various ambient environments. The sensor regulates the display's brightness between 350 nit and 2,500 nit, automatically maintaining a level that is neither too dark nor too bright. The sensor's settings can be customized by the user to achieve the ideal balance of visibility and power consumption for any environment.

OMD Series displays have a high contrast ratio (5,000:1) that provides clear and vivid delivery of visual messaging. Unlike conventional in-window displays in which the contrast ratio dramatically decreases when exposed to brighter light sources, the OMD Series high-contrast ratio is maintained, even with a high brightness of 2,500 nit.

Another display issue is that light emitted from an LCD display is all polarized, so a customer wearing polarized sunglasses with right-angled polarized lenses perceives that the display is turned off. In order to display images to everyone, Samsung applied circular polarizing technology in OMD Series displays, which eliminates display blindness caused by polarized sunglasses.

BRIGHTER  than most conventional 2,000nit outdoor signages



Conventional outdoor signage 2,000 nit

OMD Series 2,500 nit


Auto Brightness Sensor



Minimum 400nit

Maximum 2,500nit

VIVID and CRISP IMAGE even in sunlight

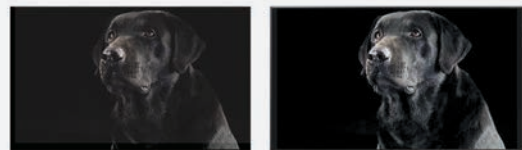

Lower contrast Ratio

5000:1 C/R OMD Series

Figure 2. Technologies for clear and dynamic messaging

Experience easy, clutter-free installation, operation and maintenance

MagiInfo E Author makes content creation through your PC straightforward. With over 200 pre-built design templates, you can create and insert professional promotions with text, images and videos to convey and emphasize messages, so you never have to start from a blank page. The templates include a range of high-quality, royalty-free (RF) images that can be immediately used by shop owners for professional-looking results. Templates are available for a variety of business and markets, such as individual retail stores, quick-service restaurants (QSRs) and other dining establishments, grocery stores, cosmetic stores, arts and entertainment venues, and healthcare facilities. Both portrait and landscape template layouts are available to suit your unique display needs.

Continuously display vibrant content with a sleek display that's ideally suited to the environment

Multiple connectivity options are available, including Wi-Fi connectivity and a mobile application which, together, support easier management. To maximize usage of the built-in Wi-Fi feature, Samsung provides the MagicInfo Mobile Application, which can be used on a tablet or other mobile device to easily deliver content to the display or to update the display's templates or content. The MagicInfo Server solution also enables professional management of multiple displays through a Wi-Fi network. In some cases, the available SD Card may be a better connectivity option than a USB memory stick because the card is designed for external environments in which the USB stick might be vulnerable to loss or theft.

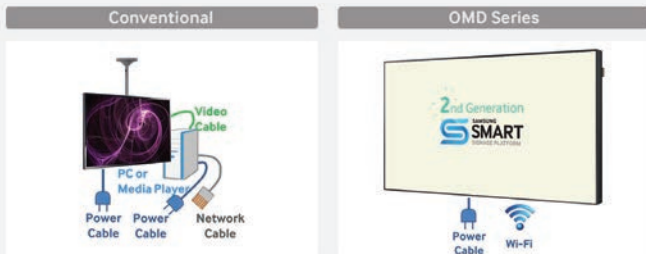


Figure 3. Clutter-free installation at window front

Present brilliant messaging in a slim, highly viewable and aesthetic design

A narrow, 9.3 mm bezel offers a slim, sophisticated appearance with minimal distraction. The slim bezel allows the OMD Series displays to be used in seamless video walls for stunning window and wall displays. In addition, the OMD Series slim-depth panel delivers an efficient use of space while reducing housing design costs.

Rely on OMD Series durability, even in demanding conditions

The OMD Series LCD cell can withstand temperatures as high as 110°C (230°F), ensuring the displays' durability in direct and indirect sunlight environments.

In-window digital displays with high brightness tend to generate more noise than ordinary displays and, because the displays are typically installed inside the store's front window, this noise can detract from the store's image. OMD Series signage controls noise at 30 dBA at a 1-meter distance, the equivalent of a whisper in a quiet library.



Figure 4. Heat endurance and low noise for semi-outdoor use

Choose the ideal display type for any business environment

OMD Series provides two models to fit any digital signage environment: OMD-K and OMD-W.

OMD-K is a kit-type panel that is specifically designed for use in various customized housings to serve a wide range of configurations and environmental needs. The OMD-K display has connectivity ports and labels that are exposed on the back side, so it is recommended for use in configurations that cover the rear portion of the display.

OMD-K is ideal for full outdoor environments because of its 2,500 nit brightness, provided the display's housing is designed with the outdoor environment in mind. This means that dust-proofing, water-proofing, cooling system and other considerations must be taken into account when designing the installation.

OMD-W is an aesthetically pleasing standalone panel with a back cover that hides its array of connectivity ports and openings.



Figure 5. Window type and kit type to fit any environment

* MagicInfo Mobile is compatible with :

1. Android 4.0 - 4.4.2 (Galaxy S3, S4, S5, Galaxy Note2, Note3)
2. iOS 6.0 - 8.0 (iPhone 4, 4S, 5)


Samsung OMD Series SMART Signage

OMD-W

46" / 55" / 75"



Connectors

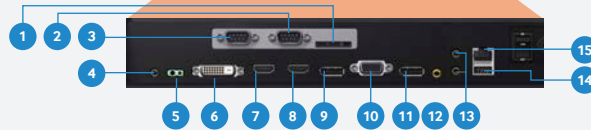



1. SD CARD
2. RS232C IN
3. RS232C OUT
4. IR OUT
5. CONTROL IN/ALU
6. DVI IN
7. HDMI IN 1
8. HDMI IN 2
9. DP IN
10. RGB IN
11. DP OUT (LOOP OUT)
12. AV/COMPONENT IN
13. AUDIO IN/OUT
14. USB
15. RJ45

OMD-K

46" / 55" / 75"



Connectors

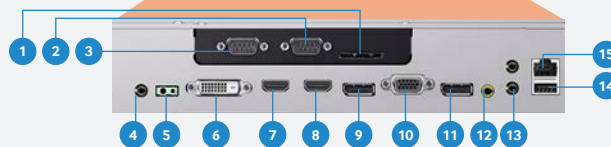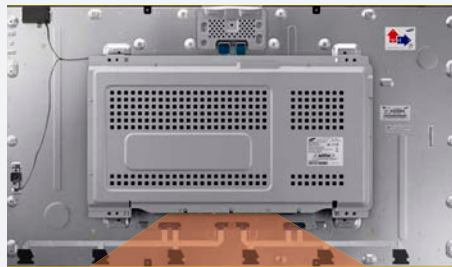

1. SD CARD
2. RS232C IN
3. RS232C OUT
4. IR OUT
5. CONTROL IN/ALU
6. DVI IN
7. HDMI IN 1
8. HDMI IN 2
9. DP IN
10. RGB IN
11. DP OUT (LOOP OUT)
12. AV/COMPONENT IN
13. AUDIO IN/OUT
14. USB
15. RJ45

Samsung OMD Series SMART Signage

OMD-W/K Specifications

		OM46D-W/K	OM55D-W/K	OM75D-W/K	
Panel	Diagonal Size	46"	55"	75"	
	Type	S-PVA			
	Resolution	1920 x 1080 (16:9)			
	Active Display Area (mm)	1018.08(H) x 572.67(V)	1209.6(H) x 680.4(V)	1650.24(H) x 928.26(V)	
	Brightness (Typ.)	2,500 cd/m2			
	Contrast Ratio	5,000:1			
	Viewing Angle (H/V)	178/178			
	Response Time (G-to-G)	6 ms			
	Display Colors	8 bit - 16.7 M			
	Color Gamut	72%			
Display	H-Scanning Frequency	30 - 81 kHz			
	V-Scanning Frequency	48 - 75 Hz			
	Maximum Pixel Frequency	148.5 MHz			
Sound	Speaker Type	Built-in Speaker (10 W + 10 W) / N/A			
Connectivity	INPUT	RGB	Analog D-SUB, DVI-D, DisplayPort® 1.2		
		VIDEO	HDMI®1, HDMI2, Component (CVBS Common)		
		AUDIO	Stereo Mini Jack		
	OUTPUT	RGB	DP1.2 (Loop-out)		
		VIDEO	N/A		
		AUDIO	Stereo Mini Jack		
		Power Out	N/A		
	EXTERNAL CONTROL	RS232C (In/Out), RJ45			
	EXTERNAL SENSOR	Detachable Type (IR, Ambient)			
	Power	Type	Internal		
Power Supply		AC 100 - 240 V~ (+/- 10 %), 50/60 Hz			
Power Consumption		Max [W/h]	395	495	935
		Typical [W/h]	220	300	550
		Sleep mode	less than 0.5 W		
	Off mode	less than 0.5 W			
Mechanical Spec	Dimensions (mm/in.)	Set	1,035.9 x 590.5 x 139.2 (40.7 x 23.2 x 5.4) / 1,035.9 x 590.5 x 142.9 (40.7 x 23.2 x 5.6)	1,227.4 x 698.2 x 139.5 (48.3 x 27.4 x 5.4) / 1,227.4 x 698.2 x 143.2 (48.3 x 27.4 x 5.6)	1,675.8 x 953.8 x 124.6 (65.9 x 37.5 x 4.9) / 1,675.8 x 953.8 x 123.1 (65.9 x 37.5 x 4.8)
		Package	1,123 x 686 x 236 (44.2 x 27 x 9.2)	1,335 x 808 x 265 (52.5 x 31.8 x 10.4)	1,815 x 1,075 x 415 (71.4 x 42.3 x 16.3)
	Weight (kg/lb)	Set	19.6 (37.2) / 18.7 (41.2)	24 (52.9) / 22.4 (49.3)	48 (105.8) / 42.2 (93)
		Package	25.1 (55.3) / 24.2 (53.3)	30 (66.1) / 28.4 (62.6)	60 (132.2) / 54.2 (119.4)
	VESA Mount (mm)	600 x 400			
	Protection Glass	N/A			
	Stand Type	N/A			
	Media Player Option Type	Embedded, SIM (Slide in Module)			
	Bezel Width (mm/in.)	9.3 (0.37) [L/R: 7.8 (0.3), Bottom: 6.5 (0.2)]			
	Operation	Operating Temperature	0°C~ 40°C (w/o Direct Sunlight) / 0°C~ 30°C (w/o Direct Sunlight)		
Humidity		10~80%			

Samsung OMD Series SMART Signage

OMD-W/K Specifications		OM46D-W/K	OM55D-W/K	OM75D-W/K	
Key		Extremely High Brightness, Outdoor Kit Solution	Extremely High Brightness, Semi-Outdoor Kit Solution	Extremely High Brightness, Semi-Outdoor Kit Solution	
Special		Plug and Play, MagicInfo S2, Slide in Module, Digital Daisy Chains (100ea), Lamp Error Detection, Anti Image Retention, Temperature Sensor, RS232C/RJ45 MDC, PIP/PBP, Video Wall (10 x 10), Portrait Installation Support, Button Lock, Smart Scheduling, Wi-Fi Embedded, Sunglasses Viewable, Built-in Speakers (10 W + 10 W, OMD-W only)			
Feature	Processor	Cortex [®] -A9 1 GHz Quad Core CPU			
	On-Chip Cache	L1 (I/D) : 32 KB / 32 KB L2 (Unified) : 1 MB			
	Memory				
	Clock Speed	1 GHz CPU Quad			
	Main Memory Interface	1.5 GB Dual 48 bit DDR3-933 (1,866 MHz)			
	Internal Player (Embedded H/W)	Graphics	2D & 3D Graphics Engine - Up to 1920x1080, 32 bpp - Supports OpenGL ES		
		Storage (FDM)	8 GB (2 GB Occupied by O/S, 6 GB available)		
	Multimedia	Video Decoder - MPEG-1/2, H.264/AVC (Dual) - VC-1, JPEG, PNG, VP8 Audio DSP (Decoder) - AC3 (DD), MPEG, DTS and etc.			
	IO Ports	USB 2.0			
	Operating System	Linux [®]			
Certification	Safety	UL (USA) : UL 60950-1 CSA (Canada) : CSA C22.2 No. 60950-1 TUV (Germany) : EN60950-1 NEMKO (Norway) : EN60950-1 KC (Korea) : K60950-1 CCC (China) : GB4943.1-2011 PSB (Singapore) : IEC60950-1 GOST (Russia) : IEC60950-1, EN55022 SIQ (Slovenia) : IEC60950-1, EN55022 PCBC (Poland) : IEC60950-1, EN55022 NOM (Mexico) : NOM-019-SCFI-1998 IRAM (Argentina) : IEC60950-1 SASO (Saudi Arabia) : IEC60950-1			
	EMC	FCC (USA) : FCC Part 15, Subpart B class B CE (Europe) : EN55022, EN55024 VCCI (Japan) : V-3 (CISPR22) KCC (Korea) : KN22, KN24 BSMI (Taiwan) : CNS13438 (CISPR22) C-Tick (Australia) : AS/NZS3548 (CISPR22) CCC (China) : GB 9254-2008, GB 17625.1-2003			
	Environment	N/A			
Accessories	Included	External IR/Brightness Sensor, Quick Setup Guide, Regulatory Guide, Warranty Card, D-Sub cable, Power Cord, Remote Controller, Batteries			
	Optional	Stand	N/A		
		Mount	N/A		
Media Player	CPU				
	N/B				
	S/B				
	GPU				
	FDM/HDD	SBB-C (Optional)			
	Memory				
	Ethernet				
Connectivity	USB				
	Output				
	Others				

Samsung OMD Series SMART Signage

About Samsung Electronics Co., Ltd.

Samsung Electronics Co., Ltd. is a global leader in technology, opening new possibilities for people everywhere. Through relentless innovation and discovery, we are transforming the worlds of TVs, smartphones, tablets, PCs, cameras, home appliances, printers, LTE systems, medical devices, semiconductors and LED solutions. We employ 286,000 people across 80 countries with annual sales of US\$216.7 billion. To discover more, please visit www.samsung.com.

For more information

For more information about Samsung OMD Series displays, visit www.samsung.com/business or www.samsung.com/displaysolutions.

Copyright © 2014 Samsung Electronics Co., Ltd. All rights reserved. Samsung is a registered trademarks of Samsung Electronics Co., Ltd. Specifications and designs are subject to change without notice. Non-metric weights and measurements are approximate. All data were deemed correct at time of creation. Samsung is not liable for errors or omissions. All brand, product, service names and logos are trademarks and/or registered trademarks of their respective owners and are hereby recognized and acknowledged.

DisplayPort is a registered trademark of the Video Electronics Standards Association.

HDMI, the HDMI logo, and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing, LLC in the United States and other countries.

ARM and Cortex are trademarks or registered trademarks of ARM Ltd. or its subsidiaries.

Linux is a registered trademark of Linus Torvalds.

Samsung Electronics Co., Ltd.
129 Samsung-ro,
Yeongtong-gu,
Suwon-si, Gyeonggi-do 443-742,
Korea

www.samsung.com

2015-01

