


# calculators & organizers

01:01:22

PLAY/ Can

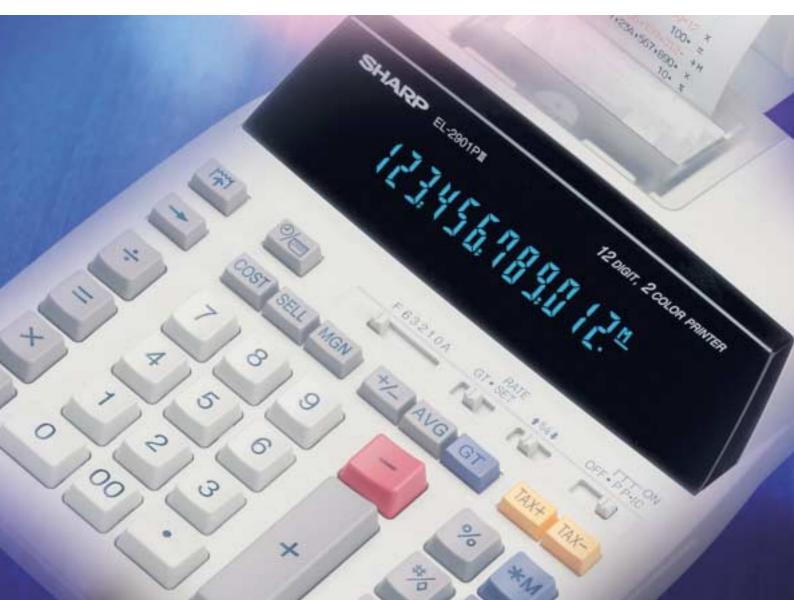

# handy and functional electronic devices



SHARP CALCULATORS & ORGANIZERS SOLUTIONS



### SHARP Innovations Continually Write New Chapters into the Pages of History.

1964

Forty years ago, SHARP gave the world its first electronic desktop calculator, now on display at the National Museum of Science & Industry as an innovative milestone. Succeeding generations carry on this trailblazing spirit, generating a remarkable stream of SHARP original creations.

Development of the world's first electronic desktop calculator incorporating ICs.






Since the introduction of the first electronic desktop calculator, SHARP has led the way in the field of calculator technology. A history of superior engineering, advanced functions, and innovative technologies has made SHARP calculators and organizers the choice in all fields, the world over. And this year, we celebrate 40 years since the development of one of our many original creations: the world's first alltransistor desktop calculator.

Development of the world's first COS electronic LCD calculator. Development and introduction of electronic organizer (Personal Information Tool). Development and introduction of graphing calculator with a touch screen for educational market.

Development and introduction of the world's first graphing calculator with a reversible keyboard.

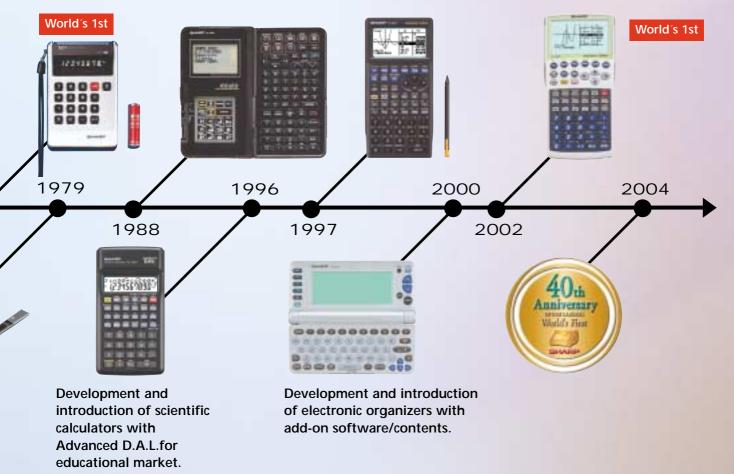

### Guide to Symbols Picts



#### Euro Convertion



Display illuminates for easy use in dark or poor lighting conditions.



Synchronisation of your organizer and PC PIM data allows for easy one-step integration



Displays information and guidance in one of several selectable languages.



The telephone file has a nameable directory. Stored telephone numbers are displayed with other information



The e-mail file has a nameable directory. Stored e-mail addresses are displayed with E-mail Address



See the entire week's scheduled activities. Enter appointments by day.



The memo function is ideal for structuring and organising ideas within an overview of topics.



The customisable clock displays home and world times, including daylight saving time (summer time) on a 12- or 24-hour basis.



The conversion mode lets you convert currencies or measurements by simply touching a button.



Store items and prioritise them on the To Do list.



Built-in games turn the pocket databook into an entertainment centre



Check the spelling of English words against suggested matches.



The Diet Function uses the built-in pedometer to keep track of calories burned. It also helps you to calculate your daily caloric intake.



Lets you conveniently select items from the menu screen.



Durable hard case protects calculator from damage.



Features easy key-in for algebraic equations.





answer at the same time

Allows users to check the equation and



Recalls any of the last 142 steps.



Eliminates the need to re-enter the constant when doing repeated calculations



Allows the previous answer to be used in the next calculation.



Allows you to easily find the answer to d/dX derivative calculations. merical





Allows you to easily find the answer to integral calculations.

■--F1 ■--F3 ■--F2 ■--F4

Formulas or equations can be stored to simplify calculations.



3-DIGIT Punctuation 3-Digit Punctuation

For easier reading of long, multi-digit numbers, "," or "'' is inserted for each group of three digits.



Enables quick input of a keystroke, even if you still have a finger on the previous key.



Batteries provide back-up to solar power **()** when light source is interrupted.



Includes handy wallet cover for extra protection and easy storage.



Easy-to-read large digital display reduces eye strain, preventing errors.



Automatically calculates the total sum of amounts generated.





Quick and convenient calculation of cost, selling price and margins; ideal for business transactions.





Long-life plastic buttons.

Off Function has taken effect. ne Function Resume Function plus Line Counter and Condition Symbol.

Resumes operations after the Auto Power-

Adjustable angle for personal

Fixed angle to ensure optimum

Raises calculator to an ideal

preference

readability.

**Kick Stand** Kalses calculator to un total operating angle for easier data entry.

**Resume Plus** Functio

RESUME PLUS

RESUME

Tilt Display

Slant Display

An "OK" sign appears when the ANSWER CHECK calculation being checked matches the Answer Check result of the first.



Calculates average of inputted data.

Calculates prices with or without taxes.



Tax Calculation

DAY/DATE Day/Date Calculation

Determines the number of days and a specific date from inputted dates.



Printed report is easy to read with red ink used for negative.

3 rates can be converted easily with the touch of a button.



Easy conversion of units such as currencies, based on an adjustable rate set by the user.



onverter

Fits easily in the palm of your hand.





Comes with attached hard cover for







www.sharp-cee.com

|                   | Product<br>Line-Up        | Index  |                            |
|-------------------|---------------------------|--|----------------------------|
| A HI CONSTRUCTION | Digital Voice<br>Recorder | Page 6<br>PA-VR5E<br>PA-VR10E PCE  | Didital Voice<br>Recorder  |
|                   | Electronic<br>Organizers  | Раде 7<br>zq-p20н<br>zq-p10  | Electronic<br>Organizer    |
|                   | Scientific<br>Calculators | Page 8 - 10<br>EL-501WWH, EL-506WWH,<br>EL-520WWH, EL-531WHWH,<br>EL-5250                                | Scientific<br>Calculators  |
|                   | Printing<br>Calculators   | Page 11<br>EL-2607P, EL-2901PIII<br>EL-1801C, EL-1611P   | Printing<br>Calculators    |
| Site site         | Office<br>Calculators     | Page 12 - 14<br>EL-2125C, EL-338G, EL-337C,<br>EL-421M, EL-334F, EL-332A,<br>EL-310A, EL-M700G, EL-M711G | Office<br>Calculators      |
|                   | Persomal<br>Calculators   | Page 15 - 16<br>EL-250S, EL-233S, EL-480SR<br>EL-W211G, EL-376S, EL-243S,                                | Personal<br>Calculators    |
|                   | Kids´<br>Calculators      | Page 17<br>EL-S10 BPK/BBL  | Kids'<br>Calculators       |
|                   | 14 Digit<br>Calculators   | Page 17<br>EL-145A<br>EL-144A<br>EL-143S   | 14 Digit<br>Calculators    |
|                   | Specifications &          | Page 18 - 25   | ations<br>ndising-<br>tion |

Merchandising Information

Specificatic Merchandi informatio



### Digital Voice Recorders

#### The Handy, High-Capacity Voice Recorder

Whether it's a week-long business trip or a weekend seminar, there's one personal assistant you can't afford to leave behind. One tool that frees you from constant note-taking, and allows you to get more involved in the discussion. Meet the slender, palm-fitting PA-VR10EPCE/5E digital voice recorder from SHARP. With the PA-VR10E PCE, you can record approximately 28 hours of meetings, lectures, or memos (approximately 14 hours for the PA-VR5E). Now bothersome, low-capacity cassettes are a thing of the past. Instead, you get reliable, extended voice recording and a host of practical conveniences. The PA-VR10EPCE/5E from SHARP — putting longer recording within your grasp.

### PA-VR10EPCE, PA-VR5E

- 28 (PA-VR10EPCE)/14 (PA-VR5E) hours (approx.) recording capacity (LP mode)
- 4 folders: up to 127 separate files
- Personalised alarm
- Timer recording
- Timer stamp
- 2 microphone sensitivity settings
- Dimensions: 31 (W) x 111 (D) x 16.8 (H) mm
- Weight: approx. 66 g (w/ batteries) (PA-VR10EPCE) approx. 65 g (w/ batteries) (PA-VR5E)



PA-VR5E

#### PA-VR10EPCE

### An Array of User-Friendly Features

#### Time Stamp & Event Marking

The Time Stamp feature automatically marks each recording with the time and date, so you can keep track of your recordings more effectively. Event Marking, meanwhile, lets you "bookmark" relevant moments during a meeting or presentation, so you can find them more easily when you later review the recording. Up to 50 Event Marking numbers can be inserted into each file.

#### Schedule Recording

You needn't worry about forgetting to press the record button for a lesson, meeting or presentation. Schedule Recording allows you to preset the unit to record for a specified time period. This way, you can leave the unit unattended in a classroom or meeting location and still get the recording you need.

#### Message Alarm

Stay on top of your busy schedule, with the PA-VR10EPCE/5E's customizable alarm. Instead of a generic alarm tone, you can record a message to be played back at the time of your choosing. A customized message gives you a more detailed reminder about that important event or appointment. As many as 3 different alarms can be set at one time.

#### USB Connectivity (PA-VR10EPCE only)

The PA-VR10EPCE comes with a handy USB port that enables connection to a PC. USB connectivity allows you to easily transfer recorded files to your PC for data back-up.\*

\* The PA-VR10EPCE supports IBM PC/AT-compatible computers using one of the following operating systems: Microsoft<sup>®</sup> Windows<sup>®</sup> XP Professional/XP Home/Me/2000 Professional/98/98SE. One USB port (version 1.1 or above) is required to connect your PC to the digital voice recorder. A commercially available USB (A) male-USB (Mini-B) male cable is supplied in the package.

Note: If your PC is running Windows 98 or 98SE, you will need to install a dedicated USB driver included.

#### Stylish Design

The see-through acrylic face of the PA-VR10EPCE/5E provides more than just robust protection for the LCD screen; it also provides an elegant finishing statement. The centrally-located scroll wheel, meanwhile, offers design simplicity as well as effortless one-handed operation.



#### Other Features

- Clock Mode Screen (M/D, h:m:s) File Skip FF/FR
- 3-Way Speed Control (Fast/Reg/Slow) Repeat Function Voice Activation Function
- 2 Microphone Sensitivity Settings (HIGH/LOW)\* Hold Function
- \* The high-sensitivity mode (HIGH) enables you to record peripheral sound in addition to your intended target sound. The normal sensitivity mode (LOW), meanwhile, is ideal for dictation.


### **Electronic Organizers**

### Pocket Computer



### ZQ-P10

- Power source: CR2032 x 1
- Dimensions: 64 (W) x 97 (D) x 14.8 (H) mm 2-17/32" x 3-13/16" x 19/32"
- Weight: approx. 72 g
- Memory at 96KB equivalent. approx. 1,500 telephone names & numbers (name, telephone and fax number are 14 characters per entry) can be stored by using compression technology. (Compression rate approx. 1.5:1)



ZQ-P10 (Blister Back) 4 974019 023632

12-Column

by 3-Line

1MB

**Flash Memory** 

🎼 BackLight

Multi-Language

ZQ-P20H (clamshell) 4 974019 024189





Synchronise with Microsoft<sup>®</sup> Outlook<sup>®\*</sup> (ZQ-P20H)

• Synchronise contact information with your PC.

### ZQ-P20H

- Power source: CR2032 x 2 (Main/Backlight)
- Dimensions: 69,8 (W) x 109,3 (D) x 16,3 (H) mm 11 2-3/4" x 4-5/16" x 21/32"
- Weight: approx. 104 g
- An English version of Microsoft° Outlook° 98/2000/ 2002/2003 must be installed to utilize the synchronisation software. \*\*The PC Software is intended to run on a PC with an Englisch version of Microsoft° Windows° 98/98SE/2000 Professional/Me/XP Home/XP Professional.



Includes PC-Link cable with serial port connector and software\*\* English model only


#### Diet Function (ZQ-P20H)

# 海道院

ZQ-P20H

Schedule To Do Memo Synchronisation USB PC-Link cable (included) (N.B. ZQ-P20H requires included PC-Link cable.)

Tel



### Multi-Language Guidance Message (ZQ-P20A, ZQ-P10A EL-6053S)

10-Language (ZQ-P20A, ZQ-P10A)

English, German, Spanish, French, Italian, Portuguese, Czech, Greek\*, Hungarian, Polish \* Only capitalized letters can be entered in Greek Mode.

- An English version of Microsoft® Outlook® 98/2000/2002/2003 must be installed to utilize the
- The PC software is intended to run on a PC with an English version of Microsoft® Windows® 98/98SE/2000 Professional/Me/XP Home/XP Professional.





- Use the built-in pedometer to keep track of calories burned by walking
- Record and calculate your daily intake of calories and carbohydrates, along with other nutritional data, using the
- downloadable food database on the included CD-ROM. (N.B. Only the ZQ-P20H handles other nutritional data.)
- Compare with previous records of calories taken in or burned.
- The unit may not count steps correctly if you:
- Walk at an irregular pace, or in a crowded place.
  Shuffle legs excessively.

- Are in a vehicle with vertical and horizontal motions.

<u>an</u>D 21-3-2005 CALORIE Kcal 12.773







- Attach the unit improperly (tilted, for example).
- 2nc



- · Wear sandals when walking.
  - Move up/down excessively.

ABC

D

+= ×

玂

C

 $\Box$ 


Built-in pedometer

### Glas Top Design

### Greater Efficiency and Ease of Use Advanced D.A.L.

#### Direct Algebraic Logic (D.A.L.) D.A.L.

Until the introduction of SHARP's D.A.L., keying in equations had been a complicated process making scientific calculators difficult to use. Introduced in 1992 and an industry-first, SHARP's D.A.L. allows symbols and numbers of an equation to be entered as they are written. Instead of wasting energy on difficult calculator operations, users are free to concentrate on mathematical concepts.

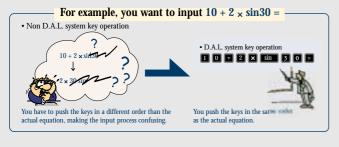


#### 2-Line Display **2-Line**

A 2-line display allows the users to check the equation and answer at the same time. Because the equation remains on display, it is easy to edit or make substitutions if necessary.



### Multi-Line Playback 🛛 🌀

SHARP's Multi-Line Playback function lets you recall any of the last 142 steps you have made. This feature is very useful for comparing formulas and recalculating equations.

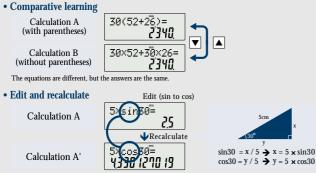


Change the previous equation and recalculat


#### Constant/Chain Calculations

Constant and Chain Calculation functions are popular in general electronic calculators as they allow equations to be entered without having to key repeatedly. Confusion may arise however, as not all scientific calculators show the equation being equal to the answer in the formula display. With SHARP's scientific calculators, the figures you omit are automatically shown as K (constant) or ANS (answer)\*. Contradictions between equations and answers are eliminated and calculations are easier and more logical to enter.

\* EL-500W and EL-510R do not display "K" or "ANS"



A portion of the equation is automatically memorised as a constant, thus omitting redundant input.




The answer can be used as is in the next calculation. (Example using EL-506W.)


SHARP

#### Numerical Derivative/Integral d/dX JdX

Simply enter numerical values following the interactive on-screen instructions, and you can find the answer easily of derivative and integral calculations. You don't have to re-enter the formula, and the calculation can be repeated as many times as needed.



#### • Numerical Derivative [2ndF] [d/dx]



You can calculate the same derivative calculation repeatedly without having to input the formula again.


#### • Numerical Integral $\int dx$



You can calculate the same integral calculation repeatedly without having to input the formula again.

#### Formula Memory

Frequently used formulas or complex equations can be stored as functions in Formula Memory\*. By recalling the formula, you can substitute new variables into the equation and recalculate it without having to enter the entire sequence again. Since you can do repeat equations, it's also convenient for simulations. \*Formulas up to 256 characters in length can be stored in F1-F4.

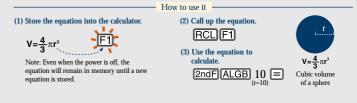

#### Solver Function


This function enables calculation of a variable x in a given equation. Other variables (a, b, c, etc.) must already be defined in order to calculate x.

Equation " $\sin x - 0.5$ " (DEG)



#### Matrix Function

In addition to the four basic arithmetic functions (excluding division between matrices),  $\chi^3$ ,  $\chi^2$ , and  $\chi^{-1}$ , users are provided with transpose and cumulative matrix functions, among others. Up to four matrices can be saved in memory, each up to four rows by four columns in size.

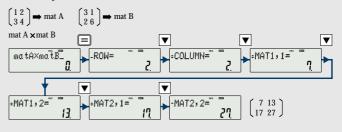

8

### Standard





### EL-506WWH

- Power source: Twin power (Solar & LR44 x 2)
   Dimensions: 79.6(W) x 154.5(D) x 13.2(H) mm
- 3-1/8" x 6-3/32" x 17/32"
- Weight: approx. 97 g

Matrix/list calculations Constant/chain calculations Multi-line playback Solver function Matrix function Sturdy, stylish design





### EL-520WWH

- Power source: Twin power (Solar & LR44 x 2)
- Dimensions: 79.6 (W) x 154.5 (D) x 13.2 (H) mm 3-1/8" x 6-3/32" x 17/32"
- Weight: approx. 97 g

Constant/chain calculations Multi-line playback Solver function Sturdy, stylish design






### EL-531WHWH

Power source: R6 (AA) x 1
 Dimensions: 79.6 (W) x 154.5 (D) x 18.2 (H) mm 3-1/8" x 6-3/32" x 23/23"

Weight: approx. 110 g

Constant/chain calculations Multi-line playback Sturdy, stylish design

SHARP



EL-531WHWH 4 974019 023984

### Glas Top Design



### EL-501WWH

Power source: LR44 x 2

Dimensions: 78.6 (W) x 144 (D) x 11.6 (H) mm 3-3/32" x 5-21/32" x 15/32"

Weight: approx. 75 g

Constant/chain calculations Stylish design





### EL-5250

- Programmable up to 4,096 steps
- Solver function
- Power source: CR2032 x 2
- Dimensions: 79.6 (W) x 154.5 (D) x 15.2 (H) mm 3-1/8" x 6-3/32" x 19/32"
- Weight: approx. 97 g

CS-2635RH

11

н÷.

Printing speed: 4.3 lines/sec.

Weight: approx. 2.000 g

Power source: AC only

| 1 | 14 + 2-Digit | 4,096 Steps   | D.A.L.             | 3    | a ÷K =X<br>b ∺K =Y<br>c ÷K =Z |
|---|--------------|---------------|--------------------|------|-------------------------------|
|   | by 3-Line    | 423 functions | A+B=C<br>√C=D      | d/dX | ∫dX                           |
|   |              |               | 2-KEY<br>Roll-over |      | P                             |

EL-5250 (Box + Strap) 4 974019 024677

### Printing Calculators



CS-2635RH 4 974019 023564



Dimensions: 250 (W) x 345 (D) x 78 (H) mm

Covenient 2-memory stystem (M&I memory)



### Printing Calculators

#### Desktop/ Semi Desktop



### EL-2607P

- Printing speed: Approx. 4.3 lines/sec.
- Power source: AC only
- Dimensions: 222 (W) x 327 (D) x 78 (H) mm 8-3/4" x 12-7/8" x 3-1/16"
- Weight: approx. 1,900 g

| 12-Digit      | 2-COLOUR PRINT |
|---------------|----------------|
| LARGE DISPLAY | AVG            |
| GTFUNCTION    | ±TAX           |

EL-2607P (Box) 4 974019 023663

12-Digit

GTFUNCTION

DISPLAY

2-COLOUR PRINT

**±TAX** 

Cost Sell Margin

AVG

DAY/DATE

Scientific Calculators

Printing Calculators

# EL-2901PIII

- Printing speed: 2.1 lines/sec.
- Power source: AC only
- Dimensions: 193 (W) x 256 (D) x 62.5 (H) mm 7-19/32" x 10-3/32" x 2-15/32"
- Weight: approx. 1,000 g

### EL-1801C

- Printing speed: 2.1 lines/sec.
- Power source: DC/AC
- (AA x 4, AC adapter optional) Dimensions: 170 (W) x 231 (D) x 57.5 (H) mm
- 6-11/16" x 9-15/16" x 2-1/4" Weight: approx. 580 g



## Semi Desktop



2-COLOUR PRINT

EL-1801C (Box + Strap) 4 974019 009247

### EL Pri Pri (/ D 3

Internal Paper-Roll Supply

External Paper-Roll Supply

### EL-1611P

- Printing speed: 1.6 lines/sec.
- Power source: DC/AC
- (AA x 4, AC adapter optional) Dimensions: 96 (W) x 191 (D) x 40 (H) mm 3-3/4" x 7-1/2" x 1-9/16"
- Weight: approx. 315 g



Only for Hungary, Czech

SHARP

Semi Desktop





EL-1611P (Box + Strap) 4 974019 009292 Office Calculators

Desktop Semi-Desktop



### EL-2125C

Power source: Twin power (Solar cell & LR44 x 1)

Dimensions: 140 (W) x 195 (D) x 22.5 (H) mm

5-19/32" x 7-21/32" x 29/32" Weight: approx. 215 g

🔅 EL-2125E

Only for Hungary, Czech



EL-2125C (Box+Strap) 4 974019 022772



### EL-338G

Twin power (Solar cell & LR44 x 1)

Dimensions: 135 (W) x 200 (D) x 17 (H) mm 5-5/16" x 7-7/8" x 21/32"

Weight: approx. 220 g

🔅 EL-338E

Only for Hungary, Czech



Easy Hold

EL-338G (Box+Strap) 4 974019 024462



#### Office **Calculators** Nice Size Nice Size EL-337C 12-Digit GTRUNCTION RESUME Power source: Twin power **Tilt Display** (Solar cell & LR44 x 1) Dimensions: 108 (W) x 175 (D) x 22 (H) mm DISPLAY 4-7/32" x 6-7/8" x 7/8" + TAX н÷. Weight: approx. 165 g PUNCTUATIO EL-337E EL-337C (Box + Strap) 4 974019 022758 Only for Hungary, Czech EL-421M 14-Digit ESHM Power source: Twin power ÷. DISPLAY Easy Ho (Solar cell & LR44 x 1) <u>t tax</u> Dimensions: 108 (W) x 170 (D) x 15 (H) mm 2-KEY Roll-over 🚰 Kick Stand \$/∉ 4-1/4" x 6-11/16" x 19/32" Weight: approx. 160 g EL-421M (Box + Strap) 4 974019 023175 **Convenient Functions Resume Function Answer Check** RESUME To resume operations after the Auto Power-Off Function has taken effect, An "OK" sign appears when the checking calculation matches the result press the Resume key. The display will return to the calculation that was in of the first. Function Symbol: indicates the last function used in the calculation. Resume Plus (Resume Function plus Line Counter and Condition Symbol) **ESUME** Adds the following indicators as well as Resume Function: **Tax Calculation** ±TAX · Line Counter: shows number of figures entered. Easily calculates prices with or without taxes. · Condition Symbol: indicates the next figure should be entered. Line Counter **Day/Date Calculation** DAY/DATE • Day Calculation: determines number of days between two dates. Condition 24567890 • Date Calculation: determines the date after a number of days and a starting date have been entered. Function Symbol Function Symbol

EL-334F Power source: Twin power

(Solar cell & LR44 x 1)

Dimensions: 108 (W) x 170 (D) x 15 (H) mm 4-1/4" x 6-11/16" x 19/32"

Weight: Approx. 160 g



SHARP



EL-334F (Box + Strap) 4 974019 022734 Office Calculators

### Office Calculators

Mini Nice Sice

They make life a lot simpler.



### EL-332A

- Power source: Twin power
- (Solar cell & LR44 x 1) Dimensions: 101 (W) x 142 (D) x 34 (H) mm 3-31/32" x 5-19/32" x 1-11/32"
- Weight: approx. 115 g



EL-332A (Box + Strap) 4 974019 022796



### EL-310A

- Power source: Twin power
- (Solar cell & LR1130 x 1)
- Dimensions: 87 (W) x 116 (D) x 20 (H) mm 3-13/32" x 4-9/16" x 25/32"
- Weight: approx. 76 g




EL-310A (Box + Strap) 4 974019 009490



### EL-M700G

- Power source: Twin power (Solar cell & LR44 x 1)
- Dimensions: 87 (W) x 116.5 (D) x 28.5 (H) mm 3-7/16" x 4-19/32" x 1-1/8"
- Weight: approx. 85 g



EL-M700G (Window box + Strap) 4 974019 023717



### EL-M711G


- Power source: Twin power (Solar cell & LR44 x 1)
- Dimensions: 100 (W) x 151.5 (D) x 33 (H) mm 3-15/16" x 5-31/32" x 1-5/16"




Only for Hungary, Czech



EL-M711G (Window box + Strap) 4 974019 023755

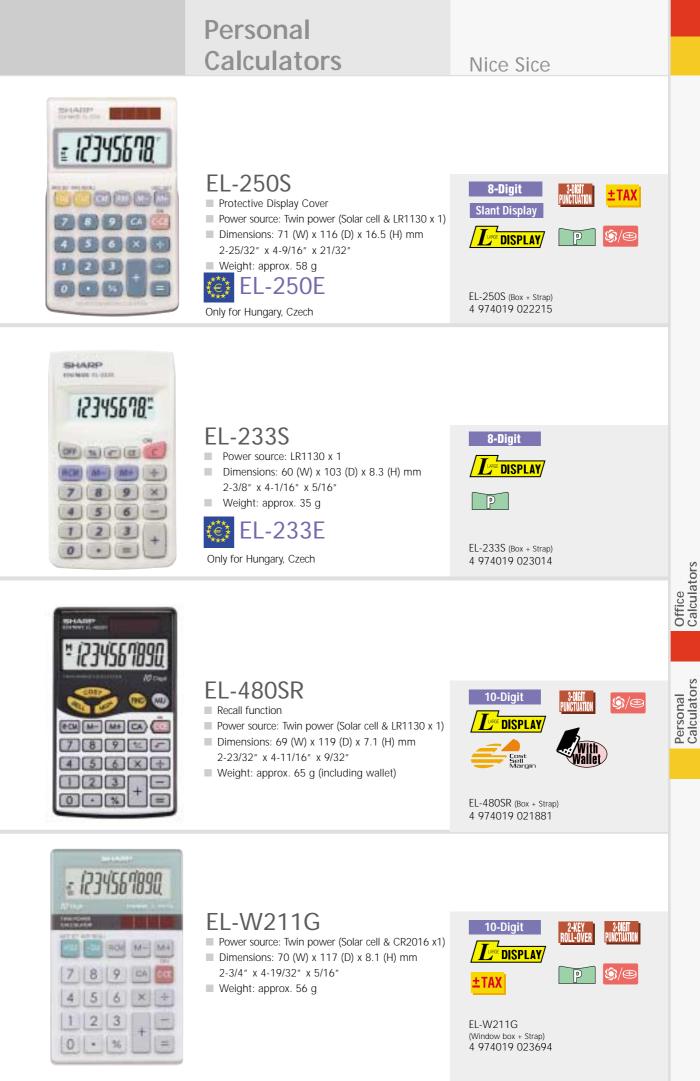

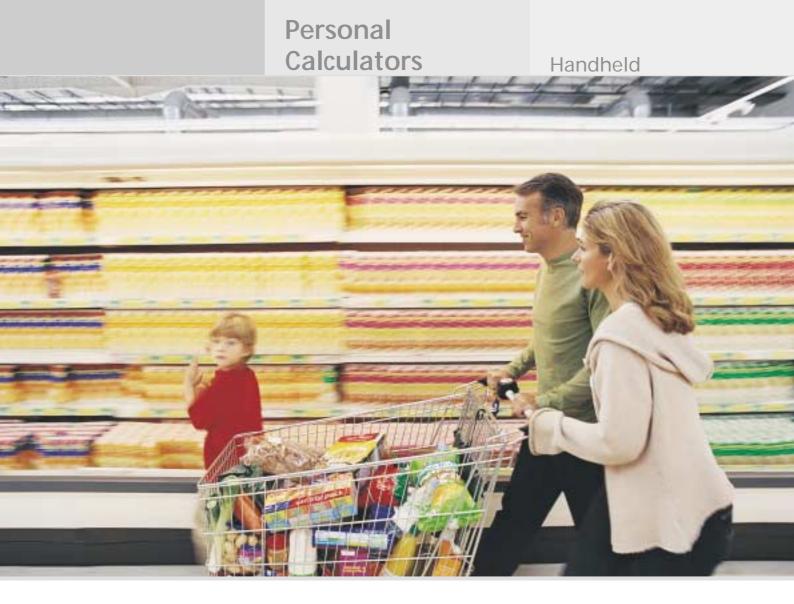



### **EL-376S**

Power source: Twin power (Solar cell & LR1130x1)

Dimensions (closed): 72 (W) x 115 (D) x 12 (H) mm 2-13/16" x 4-17/32" x 15/32"







EL-376E (Box + Strap) 4 974019 009537



### EL-243S

- Power source: Twin power (Solar cell & LR1130x1) Dimensions (closed): 64 (W) x 105 (D) x 11 (H) mm 2-1/2" x 4-5/32" x 7/16"
- Weight: approx. 51 g



EL-243S (Box + Strap) 4 974019 009575



**Kids**<sup>´</sup> **Calculators** 

### Handheld

#### For More Colourful Calculations


With basic arithmetical functions and large, easy-to-read displays, the EL-S10 is a joy to use. The light and compact EL-S10 has a protective cover, so you can take it anywhere. it features practical, easyto-click plastic keys and cute, colourful designs that are fun for everybody, not just for kids.





- Power source: LR1130 x 1
- Dimensions: 70 (W) x 107 (D) x 10.5 (H) mm (Closed)
- 2-3/4" x 4-7/32" x 13/32"
- Weight: approx. 54 g





14-Digit

Tilt Display

EL-145A (Box + Strap) 4 974019 024325

DISPLAY/

8-Digit



B

Easy Hold

\$/æ

<u>t tax</u>

<u>L TAX</u>



VES DEBENER

### **14 Digit Calculators**

### EL-145A

- Power source: Twin power (Solar cell & LR44 x 1)
- Dimensions: 110 (W) x 168 (D) x 15 (H) mm
- 4-11/32" x 6-5/8" x 19/32"
- Weight: approx. 160 g

### EL-144A

- Power source: Twin power (Solar cell & LR44 x 1)
- Dimensions: 102 (W) x 148 (D) x 15 (H) mm 4-1/32" x 5-13/16" x 19/32"
- Weight: approx. 125 g

SHARP

### Mini Nice Sice



EL-144A (Box + Strap) 4 974019 024332

14 Digit Calculators



#### Hand-held/Hard cover **EL-143S** 14-Digit 2-KEY Koll-Over Hard Power source: Twin power (Solar cell & LR1130 x 1) DISPLAY Dimensions (closed): 72 (W) x 115 (D) x 12 (H) mm NCTUATION 2-27/32" x 4-17/32" x 15/32" Weight: approx. 66 g P **(**)/9

#### 4 974019 024349

EL-143S (Box + Strap)

Voice **Recorders** 

### **Specifications**

| Model                       | PA-VR10EPCE                                     | PA-VR5E   |  |
|-----------------------------|---|---|--|
|                             | LP mode: 28 hours                               | LP mode: 14 hours                               |  |
| Recording Time              | SP mode: 8.5 hours                              | SP mode: 4 hours                                |  |
|                             | HQ mode: 4 hours                                | HQ mode: 2 hours                                |  |
| Internal Memory             | 64MB  | 32MB  |  |
| Message Alarm               | U   | 0   |  |
| Schedule Recording          | U   | 0   |  |
| Event Marking               | U   | 0   |  |
| Silence Skip Recording      | U   | 0   |  |
| Microphone Sensitivity      | High/Low  | High/Low  |  |
| LED Indicator               | U   | 0   |  |
| File Repeat                 | U   | 0   |  |
| File Skip                   | U   | 0   |  |
| Earphone/Microphone         | U/U   |   |  |
| Recording Method (Monaural) | U   | U   |  |
| USB Connection              | U   | -   |  |
| USB External Memory         | U   |   |  |
| Clock Accuracy              | Average $\pm 1$ min./month (at 25°C)            | Average ±1 min./month (at 25°C)                 |  |
| Power Source                | AAA-size alkaline batteries (LR03) x 2          | AAA-size alkaline batteries (LR03) x 2          |  |
| Dimensions (W x D x H)      | 31 x 111 x 16.8 mm<br>1-7/32" x 4-3/8" x 21/32" | 31 x 111 x 16.8 mm<br>1-7/32" x 4-3/8" x 21/32" |  |
| Weight (Approx.)            | 66 g  | 65 g  |  |

### **Electronic** Organizers

| Model                           | ZQ-P20H   | ZQ-P10  |  |
|---------------------------------|---|---|--|
| Display                         | 12-column x 3-line  | 12-column x 3-line                                |  |
| Backlight                       | 0   | -   |  |
| Memory Capacity                 | 1MB (Flash memory)*1  | 96KB equivalent*11                                |  |
| Max. Input Characters           | 36 + 72 + 36 + 36*10  | 36 + 36 + 36 + 36*10                              |  |
| Capacity Numbers                | 72*10   | 72*10   |  |
| Keyboard                        | _   | -   |  |
| Lowercase Letters               | O (Except Greek mode)   | O (Except Greek mode)                             |  |
| European Characters             | 0   | 0   |  |
| Schedule with Alarm             | 0   | 0   |  |
| Calendar                        | _   | -   |  |
| Telephone Directory             | 2-file  | 2-file  |  |
| E-mail Address                  | in Tel directory  | in Tel directory                                  |  |
| Web Address (URL)               | in Tel directory  | in Tel directory                                  |  |
| Memo                            | 0   | 0   |  |
| Home Clock with Alarm           | 0   | 0   |  |
| World Clock                     | 42-city   | 29-city   |  |
| Calculation                     | 10-digit  | 10-digit  |  |
| Currency/Unit Conversion        | 0   | 0   |  |
| Anniversary                     | -   | -   |  |
| Spell Checker                   | 0   | _   |  |
|                                 | (Approx. 10,000 English words)                                |   |  |
| English/Spanish Word Translator | —   | -   |  |
| Game                            | 0   | 0   |  |
| Secret                          | O*2   | O*2   |  |
| Diet Function                   | O*7   | -   |  |
| PC Link                         | Included<br>( Microsoft® Outlook®<br>(synchronise capability) | -   |  |
| Main (Approx. Life)             | CR2032 x 2<br>(5,000 hrs.*c, 2,000 hrs.*d, 6 mos.*e)*5        | CR2032 x 1 (2 yrs.*h)*5                           |  |
| ଞ୍ଚୁ Backup                     | Flash memory  | <u> </u>  |  |
| Backlight (Approx. Life)        | Uses main battery   | -   |  |
| Dimensions (Closed) (W x D x H) | 69.8 x 109.3 x 16.3 mm<br>2-3/4" x 4-5/16" x 21/32"           | 64 x 97 x 14.8 mm<br>2-17/32" x 3-13/16" x 19/32" |  |
| Weight (Approx.)                | 104 g   | 72 g  |  |
|                                 |   |   |  |

### **Specifications**

Certain functions will require a PC, optional PC software, add-on software, a cellular phone, a printer, and/or a wireless interface as demanded. Some services listed may not be available in some regions due to existing restrictions.

- T ZO-590A: 8MB (User area: approx. 8,000KB for data storage)
   ZO-290A: 1.5MB equivalent (User area: approx. 896KB for data storage)
   ZO-P20A: 1MB (User area: approx. 896KB for data storage)
   EL-6990P: 256KB (User area: approx. 250KB for data storage)
   \*\* Functions differ in each model.
   \*\* Concentration of the provided of t

- \*3 File attachments cannot be downloaded. Text viewer only. \*4 Downloadable from included CD-ROM.
- \*5 At an ambient temperature of 25°C (77°F). Actual battery life may vary depending on usage.
   \*a When data is continuously displayed without backlight.
   \*b When data is searched for 5 minutes and displayed for 55 minutes per hourly use, and backlight
  - is on for 2 minutes per hourly use. \*c When data is continuously displayed without backlight, with pedometer off.
- \*d When data is searched for 5 minutes and displayed for 55 minutes per hourly use, with pedo meter off.
- \*e While pedometer is on, with 5 minutes of data search, 55 minutes of data display, and 10,000 step counts per day.
- \*f When data is displayed for 30 minutes, alarm on for 20 seconds and key touch tone turned on/off 100 times per day. \*g When backlight is on for 10 seconds and off for 50 seconds.
- \*6 Memory at 1.5MB equivalent. Approx. 7,000 telephone names & numbers can be stored by using compression technology at a compression rate of approx. 1.5:1. (Names & numbers including home, office, fax, and mobile - are 14 characters per entry, and addresses are 38 characters per entry.)
- \*7 The Diet function features a built-in pedometer. It also enables calculation of the calories carbohydrates and other nutritional data for 800 different foods (200 foods for the ZQ-P20H, with no other nutritional data).
- Databases are downloadable from the included CD-ROM. 8 May not be available in some regions as stocks are very limited. 9 If operating batteries are replaced promptly when exhausted. \*10 Telephone directory mode.
- \*11 Memory at 96KB Equivalent. Approx. 1,500 telephone names & numbers (name, telephone and fax number are 14 characters per entry) can be stored by using compression technology. (Compression Rate Approx. 1.5:1)



### Specifications (Standard)

| Μ         | odel  | EL-506W(WH)   | EL-520W(WH)   | EL-531WH(WH)  | EL-501W(WH)   |
|-----------|---|---|---|---|---|
| ×         | Dot Matrix (Digit x Line)   | 12 x 1  | 12 x 1  | 12 x 1  |   |
| play      | Segment (Mantissa + Exponent)   | 10 + 2  | 10 + 2  | 10 + 2  | 10 (8 + 2)  |
| Displ     |   | 0<br>0  | <u> </u>  | 0<br>0  | 10 (8 + 2)  |
|           | 3-Digit Punctuation   | 10 + 2  | 10 + 2  | 10 + 2  | 8 + 2   |
| -         | Iculation Results (Mantissa + Exponent)   | 9   | 9   | 9   | 8+2   |
|           | emory   | 469   | 419   | -   | 131   |
| <u></u>   | Inctions  | 0   |   | <br>O   |   |
|           | FSE Display   | 0   |   | 0   | O (S only)  |
|           | Last Digit Correction   | 0   |   | 0   |   |
|           | Last Answer Memory  | 0   |   |   |   |
|           | $\pi$ , +/-, EXP  | -   |   | 0   | -   |
|           | $\frac{\mathbf{y}^{\mathbf{x}}, \sqrt[\mathbf{x}]{\mathbf{y}}, \mathbf{x}^2, \sqrt{\mathbf{x}^{-1}}, \sqrt[3]{\mathbf{x}^3}}{\mathbf{x}^3}$ | 0   |   | 0   | 0   |
|           |   | 0   |   | 0   |   |
|           | $\frac{\ln,\log,e^x,10^x}{10^x}$  | 0   |   | 0   | 0   |
|           | sin, cos, tan, sin <sup>-1</sup> , cos <sup>-1</sup> , tan <sup>-1</sup>  | 0   |   | 0   | 0   |
|           | sinh, cosh, tanh, sinh <sup>-1</sup> , cosh <sup>-1</sup> , tanh <sup>-1</sup>  | 0   | 0   | 0   | 0   |
|           | n!, nPr, nCr  | 0   | 0   | 0   | O (n! only)   |
|           | Random  | 0   | 0   | 0   | 0   |
|           | Random Dice   | 0   | 0   | 0   |   |
|           | Random Coin   | 0   | 0   | 0   | _   |
|           | Random Integer  | 0   | 0   | 0   | _   |
|           | Fraction Calculations   | 0   | 0   | 0   | _   |
|           | Reduction Study   |   |   |   | _   |
| ns        | Highest Common Factor/Lowest Common Multiple  | _   |   | _   | _   |
| Functions | Quotient and Remainder Calculation  |   |   | _   |   |
| Ű,        | $\rightarrow r\theta, \rightarrow xy, \rightarrow DEG, \rightarrow DMS$   | 0   | 0   | 0   | 0   |
| щ         | Physical Constants  | 52  | 52  | _   | _   |
|           | Metric Conversions  | 44  | 44  | _   | _   |
|           | Deg, Rad, Grad Modes  | 0   | 0   | 0   | 0   |
|           | Complex Number Calculation  | 0   | 0   | _   | 0   |
|           | 2-Var./3-Var. Linear Equations  | 0   | 0   |   | _   |
|           | Solving Quadratic/Cubic Equations   | 0   | 0   | _   | _   |
|           | Multi-Line Playback   | 0   | 0   | 0   |   |
|           | Playback  | 0   | 0   | 0   |   |
|           | Constant Calculation  | 0   | 0   | 0   | 0   |
|           | Chain Calculation   | 0   | 0   | 0   | 0   |
|           | Numerical Derivative  | 0   | 0   | _   | _   |
|           | Numerical Integral  | 0   | 0   | _   |   |
|           | Formula Memory  | 0   | 0   |   | _   |
|           | Algebraic Substitution  | 0   | 0   |   | _   |
|           | Matrix Calculation  | 0   |   | _   |   |
|           | Solver  | 0   | 0   | _   | _   |
| 3         | List Calculation  | 0   |   |   | _   |
| WIE A     | Bin/Pen/Oct/Hex   | 0   | 0   | 0   | O*10  |
| s BIN     | Logical Operation   | 0   |   | 0   | _   |
| tistic    | 1-Var./2-Var.Statistics   | 0   | 0   | 0   | O*9   |
| Sta       | Regression Calculations   | 6*6   | 6*6   | 6*6   |   |
| 2-        | Key Roll-Over   | 0   | 0   | 0   | _   |
| Po        | ower Source (Approx. Life)  | Solar/LR44 x 2<br>(5,000 hrs.)*7                    | Solar/LR44 x 2<br>(5,000 hrs.)*7                    | R6 (AA) x 1<br>(17,000 hrs.)*7                      | LR44 x 2<br>(3,000 hrs.)*7                          |
|           | imensions (W x D x H)   | 79.6 x 154.5 x 13.2 mm<br>3-1/8" x 6-3/32" x 17/32" | 79.6 x 154.5 x 13.2 mm<br>3-1/8" x 6-3/32" x 17/32" | 79.6 x 154.5 x 18.2 mm<br>3-1/8" x 6-3/32" x 23/32" | 78.6 x 144 x 11.6 mm<br>3-3/32" x 5-21/32" x 15/32" |
| W         | eight (Approx.)   | 97 g  | 97 g  | 110 g   | 75 g  |

### Specifications (Programmable)

| Mo  | odel   | EL-5250  |
|---|--|--|
| Do  | t Matrix Display (Digit x Line)  | 14 x 3   |
| Cal   | culation Results (Mantissa + Exponent)   | 10 + 2   |
| Me  | mory   | 27   |
| Fu  | nctions  | 423  |
| FSE Display   |  | 0  |
|   | Last Digit Correction  | 0  |
|   | Last Answer Memory   | 0  |
|   | π, +/–, EXP  | 0  |
|   | $y^x$ , $\sqrt[x]{y}$ , $x^2$ , $$ , $x^{-1}$                                  | 0  |
|   | ln, log, e <sup>x</sup> , 10 <sup>x</sup>                                      | 0  |
| 15  | sin, cos, tan, sin <sup>-1</sup> , cos <sup>-1</sup> , tan <sup>-1</sup>       | 0  |
| tio   | sinh, cosh, tanh, sinh <sup>-1</sup> , cosh <sup>-1</sup> , tanh <sup>-1</sup> | 0  |
| Functions   | n!, nPr, nCr   | 0  |
| Ē   | Random   | 0  |
| Fraction Calculations   |  | 0  |
| $\rightarrow$ r $\theta$ , $\rightarrow$ xy, $\rightarrow$ DEG, $\rightarrow$ DMS   |  | 0  |
|   | Deg, Rad, Grad Modes   | 0  |
| Numerical Integral  |  | 0  |
| Playback  |  | 0  |
|   | Solver   | 0  |
| )CT/  | 3 Bin/Oct/Hex Modes  | 0  |
| BIN   | 🗄 Logical Operation  | 0  |
| stics   | 1-Var./2-Var.Statistics  | 0  |
| Stati   | Regression Calculations  | 6*6  |
| Iode  | Max. Programmes  | 99   |
| me M  | Max. Steps   | 4,096  |
| Solver       Bin/Oct/Hex Modes       Logical Operation       1-Var./2-Var.Statistics       Regression Calculations       Max. Programmes       Max. Steps       Programme Titles       Subroutines, Branch       Power Source (Anoreon, Life) |  | 0  |
| Prof  | Subroutines, Branch  | 0  |
| Po  | wer Source (Approx. Life)  | CR2032 x 2 (1,800 hrs.)*1                          |
| Di  | mensions (W x D x H)   | 79.6 x 154.5 x 15.2 mm<br>3-1/8" x 6-3/32" x 19/32 |
| We  | eight (Approx.)  | 97 g   |

\*6 Linear: y = a + bx, Exponential: y = aebx, Logarithmic:  $y = a + b \ln x$ , Power: y = axb, Inverse: y = a + bx-1, Quadratic: y = a + bx + cx2

\*7 Continuous display. Actual battery life may vary depending on usage.

\*11When used continuously for 5 minutes and displayed for 55 minutes per hourly use withtemperature of approx. 25°C (77°F). Actual battery life may vary depending on usage.

SHARP

### Specifications (Desktop)

### Specifications (Desktop, Semi-Desktop, Hand-Held)

| Model   | EL-2607P   | Model  | EL-2901P III   | EL-1801C   | EL-1611P   |
|---|--|--|--|--|--|
| Display   | 12   | Display                                      | 12   | 12   | 12   |
| Memory  | 2 (GT)   | Backlight                                    | —  | -  | -  |
| Decimal Setting   | F-6-3-2-1-0  | Memory                                       | 2 (GT)   | 1  | 1  |
| Adding Mode   | U  | Decimal Setting                              | - F-6-3-2-1-0-A  | F-2-0-A  | F-3-2-1-0-A                                      |
| Constant  | U  | Adding Mode                                  | 1-0-3-2-1-0-A  | 1-2-0-A  | 1-5-2-1-0-A                                      |
| Triple Zero Key   | _  | Constant                                     | O  | 0  | 0  |
| Double Zero Key   | 0  | Double Zero Key                              | O  | 0  | 0  |
| Round Up/Off/Down   | Up/Off/Down  | Round Up/Off/Down                            | Up/Off/Down  | Off/Down   | -  |
| Item Counter  | 0  | Item Counter                                 | O  | 0  | -  |
| Grand Total   | 0  | Grand Total                                  | O  | _  | -  |
| Cost/Sell/Margin  | -  | Cost/Sell/Margin                             | O  |  |  |
| +Tax/-Tax Calculation   | 0/0  | +Tax/-Tax Calculation                        | υ/υ  | U/U  | υ/υ  |
| Mark Up   | 0  | Mark Up                                      | -  | 0  | -  |
| Conversion Function   | _  | Conversion Function                          | -  |  | _  |
| Average   | 0  | Average                                      | -  |  | _  |
| Printing Colours  | 2  | Printing Colours                             | 2  | 2  | 1  |
| Printing Speed  | 4.3 Lines/Sec.                                     | Printing Speed                               | 2.1 Lines/Sec.   | 2.1 Lines/Sec.   | 1.6 Lines/Sec.                                   |
| Lawrence of the second | *  | TRUCK TANK TANK TANK TANK TANK TANK TANK TAN | *  | *  | EA-7100P<br>(58 x ø25)★                          |
| NOLLA SS Ink Ribbon   | <b>☆</b>   |  | EA-772R  | EA-781R-BK (black)<br>EA-781R-RD (red)                 | EA-732R  |
| O DO Ink Roller   | -  | AC Adapter                                   | -  | EA-28A   | EA-28A   |
| Power Source  | AC   | Power Source                                 | AC   | AA x 4/AC*   | AA x 4/AC*                                       |
| Dimensions<br>(W x D x H)   | 222 x 327 x 78 mm<br>8-3/4" x 12-7/8"<br>x 3-1/16" | Dimensions<br>(W x D x H)                    | 193 x 256 x 62.5 mm<br>7-19/32" x 10-3/32"<br>x 2-15/32" | 170 x 231 x 57.5 mm<br>6-11/16" x 9-15/16"<br>x 2-1/4" | 96 x 191 x 40 mm<br>3-3/4" x 7-1/2"<br>x 1-9/16" |
| Weight (Approx.)  | 1,900 g  | Weight (Approx.)                             | 1,000 g  | 580 g  | 315 g  |

\* AC adapter (optional), H Part code: DPAPR1004CSZZ – 5 rolls/pack, 58 (W) x 80 (a) mm, I Part code: URBNT1007CCZZ – Ink ribbon (black/red)

### Personal Calculators

### Specifications (Hand-Held, Hard Cover, Card)

| Model                     | EL-480 SR   | EL-W211G  | EL-376S   | EL-243S   |
|---------------------------|---|---|---|---|
| Display                   | 8   | 10  | 8   | 8   |
| 3-Digit Punctuation       | 0   | 0   |   |   |
| Memory                    | 1   | 1   | 1   | 1   |
| Root                      | U   |   | U   | U   |
| Percent                   | 0   | 0   | 0   | 0   |
| Mark Up                   |   |   |   |   |
| Sign Change               | 0   |   | 0   | 0   |
| Constant                  | U   | U   | U   | U   |
| Metric Conversion         | U   |   |   |   |
| Cost/Sell/Margin          |   |   |   |   |
| Decimal Setting           |   |   |   |   |
| +Tax/-Tax Calculation     | /   | 0/0   | /   | /   |
| 2-Key Roll-Over           |   | U   |   |   |
| Auto Power Off            |   | 0   | 0   | 0   |
| Key Material              | Rubber  | Plastic   | Plastic   | Rubber  |
| Hard Cover                |   |   | 0   | 0   |
| Wallet Case               | U   |   |   |   |
| Power Source              | Solar 50 Lux                                      | Solar/CR2016 x 1                                  | Solar/LR1130 x 1  | Solar/LR1130 x 1  |
| Dimensions<br>(W x D x H) | 70 x 122 x 5.9 mm<br>2-3/4" x 4-13/16"<br>x 7/32" | 70 x 117 x 8.1 mm<br>2-3/4" x 4-19/32"<br>x 5/16" | 72 x 115 x 12 mm <sup>*5</sup><br>2-13/16" x 4-17/32"<br>x 15/32" | 64 x 105 x 11 mm <sup>*5</sup><br>2-1/2" x 4-5/32"<br>x 7/16" |
| Weight (Approx.)          | 80 g*/  | 56 g  | 66 g  | 51 g  |

\*1 Including wallet. \*2 Excluding wallet. \*3 Continuous LCD display. Actual battery life may vary depending on usage. \*4 When used for 1 hour per day. Actual battery life may vary depending on usage. \*5 When closed.

SHARP

### Specifications

| EL-250S  | EL-233S  |  |
|--|--|--|
| 8  | 8  |  |
| 0  |  |  |
| 1  | 1  |  |
|  | U  |  |
| 0  | 0  |  |
|  |  |  |
|  |  |  |
| U  | U  |  |
|  |  |  |
| F-2-0  |  |  |
| 0/0  | /  |  |
|  |  |  |
| U  | υ  |  |
| Plastic  | Plastic  |  |
|  |  |  |
| Solar/LR1130 x 1                                     | LR1130 x 1 (1 yr.)*4   |  |
| 71 x 116 x 16.5 mm<br>2-25/32" x 4-9/16"<br>x 21/32" | 60 x 103 x 8.3 mm<br>2-3/8" x 4-1/16"<br>x 5/16"                         |  |
| 58 g   | 35 g   |  |
|  | 8<br>()<br>1<br>()<br>()<br>()<br>()<br>()<br>()<br>()<br>()<br>()<br>() |  |

#### 20

### Office Calculators

### Specifications (Desktop, Semi-Desktop, Nice Sice)

| Model                      | EL-2125C   |
|----------------------------|--|
| Display                    | 12   |
| 3-Digit Punctuation        | 0  |
| Memory                     | 1 + GT   |
| Resume Function            | 0  |
| Line Counter               | -  |
| Answer Check               | O*1  |
| +Tax/-Tax Calculation      | 0/0  |
| Day/Date Calculation       | -  |
| Conversion Function        | 3-rate   |
| Root                       | -  |
| Percent                    | 0  |
| Sign Change                | 0  |
| Mark Up                    | -  |
| Grand Total                | O*2  |
| Constant                   | 0  |
| Time Calculation           | -  |
| Auto Power Off             | 0  |
| Double Zero Key            | 0  |
| Triple Zero Key            | -  |
| 2-Key Roll-Over            | 0  |
| Decimal Setting            | F-5-4-3-2-1-0-A  |
| Round Up/Off/Down          | Off/Down   |
| Right Shift                | 0  |
| Kick Stand                 | -  |
| Tilt Display/Slant Display | 0/-  |
| Power Source               | Solar/LR44 x 1   |
| Dimensions (W x D x H)     | 140 x 195 x 22.5 mm<br>5-19/32" x 7-21/32"<br>x 29/32" |
| Weight (Approx.)           | 215 g  |
|                            |  |

| Model                      | EL-338G   |
|----------------------------|---|
| Display                    | 12  |
| 3-Digit Punctuation        | 0   |
| Memory                     | 1 + GT  |
| Answer Check               | -   |
| Cost/Sell/Margin           | 0   |
| +Tax/-Tax Calculation      | 0/0   |
| Root                       | -   |
| Percent                    | 0   |
| Sign Change                | -   |
| Grand Total                | 0   |
| Constant                   | 0   |
| Time Calculation           | -   |
| Auto Power Off             | 0   |
| Double Zero Key            | -   |
| 2-Key Roll-Over            | 0   |
| Decimal Setting            | F-3-2-0-A   |
| Round Up/Off/Down          | Off/Down  |
| Right Shift                | -   |
| Kick Stand                 | -   |
| Tilt Display/Slant Display | 0/-   |
| Power Source               | Solar/LR44 x 1                                    |
| Dimensions (W x D x H)     | 135 x 200 x 17 mm<br>5-5/16" x 7-7/8"<br>x 21/32" |
| Weight (Approx.)           | 220 g   |

\*1 Includes "Round Off" mode. \*2 Includes "Round Off/Down" modes.

| Model                      | EL-337C   | EL-421M  | EL-334F  |  |  |
|----------------------------|---|--|--|--|--|
| Display                    | 12  | 14   | 10   |  |  |
| 3-Digit Punctuation        | 0   | 0  | 0  |  |  |
| Memory                     | 1 + GT  | 1  | 1 + GT   |  |  |
| Resume Function            | 0   | 0  | -  |  |  |
| Line Counter               | -   | -  | -  |  |  |
| Answer Check               | O*1   | -  | -  |  |  |
| Cost/Sell/Margin           | -   | _  | -  |  |  |
| +Tax/-Tax Calculation      | 0/0   | 0/0  | 0/0  |  |  |
| Day/Date Calculation       | -   | _  | -  |  |  |
| Conversion Function        | 3-rate  | _  | -  |  |  |
| Root                       | -   | -  | -  |  |  |
| Percent                    | 0   | 0  | 0  |  |  |
| Sign Change                | 0   | 0  | 0  |  |  |
| Mark Up                    | -   | _  | -  |  |  |
| Grand Total                | O*2   | _  | 0  |  |  |
| Constant                   | 0   | 0  | 0  |  |  |
| Auto Power Off             | 0   | 0  | 0  |  |  |
| Double Zero Key            | 0   | 0  | 0  |  |  |
| 2-Key Roll-Over            | 0   | 0  | 0  |  |  |
| Decimal Setting            | F-3-2-0-A                                       | _  | -  |  |  |
| Round Up/Off/Down          | Off/Down  | _  | -  |  |  |
| Right Shift                | _   | 0  | 0  |  |  |
| Kick Stand                 | _   | 0  | 0  |  |  |
| Tilt Display/Slant Display | 0/-   |  | _/_  |  |  |
| Power Source               | Solar/LR44 x 1                                  | Solar/LR44 x 1                                     | Solar/LR44 x 1                                     |  |  |
| Dimensions (W x D x H)     | 108 x 175 x 22 mm<br>4-7/32" x 6-7/8"<br>x 7/8" | 108 x 170 x 15 mm<br>4-1/4" x 6-11/16"<br>x 19/32" | 108 x 170 x 15 mm<br>4-1/4" x 6-11/16"<br>x 19/32" |  |  |
| Weight (Approx.)           | 165 g   | 160 g  | 160 g  |  |  |
|                            |   |  |  |  |  |

\*1 Includes "Round Off" mode. \*2 Includes "Round Off/Down" modes.



### Office **Calculators**

### Specifications (Mini Nice Sice)

| Model                      | EL-332A  | EL-310A  | EL-M711G  | EL-M700G   |
|----------------------------|--|--|---|--|
| Display                    | 10   | 8  | 10  | 8  |
| 3-Digit Punctuation        | 0  |  | 0   | 0  |
| Memory                     | 1  | 1  | 1   | 1  |
| +Tax/-Tax Calculation      | 0/0  | -/-  | 0/0   | 0/0  |
| Conversion Function        | -  | -  | 0   | -  |
| Root                       | -  | 0  | -   | _  |
| Percent                    | 0  | 0  | 0   | 0  |
| Sign Change                | 0  | 0  | 0   | _  |
| Constant                   | 0  | 0  | 0   | 0  |
| Auto Power Off             | 0  | 0  | 0   | 0  |
| Double Zero Key            | 0  | -  | 0   | -  |
| 2-Key Roll-Over            | 0  | _  | 0   | 0  |
| Decimal Setting            | -  | -  | -   | -  |
| Tilt Display/Slant Display | -/0  | -/0  | -/0   | -/0  |
| Power Source               | Solar/LR44 x 1   | Solar/LR1130 x 1                                   | Solar/LR44 x 1  | Solar/LR44 x 1   |
| Dimensions (W x D x H)     | 101 x 142 x 34 mm<br>3-31/32" x 5-19/32"<br>x 1-11/32" | 87 x 116 x 20 mm<br>3-13/32" x 4-9/16"<br>x 25/32" | 100 x 151.5 x 33 mm<br>3-15/16" x 5-31/32"<br>x 1-5/16" | 87 x 116.5 x 28.5 mm<br>3-7/16" x 4-19/32"<br>x 1-1/8" |
| Weight (Approx.)           | 115 g  | 76 g   | 130 g   | 85 g   |

### **Kids**<sup>´</sup> Calculators

### Specifications

### Specifications

| Model                       | EL-S10(PK/BL)   |
|-----------------------------|---|
| Display                     | 8   |
| 3-Digit Punctuation         | U   |
| Memory                      | 1   |
| Root                        | 0   |
| Percent                     | U   |
| Sign Change                 | U   |
| Constant                    | 0   |
| Decimal Setting             | -   |
| 2-Key Roll-Over             | -   |
| Auto Power Off              | U   |
| Slant Display               | -   |
| Key Material                | Plastic   |
| Hard Cover                  | U   |
| Power Source (Approx. Life) | LR1130 x 1 (1 yr.)* <sup>7</sup>                              |
| Dimensions (W x D x H)      | 70 x 107 x 10.5 mm <sup>*2</sup><br>2-3/4" x 4-7/32" x 13/32" |
| Weight (Approx.)            | 54 g  |

\*1 When used for 1 hour per day. Actual battery life may vary depending on usage. \*2 When closed.



### 14 Digit Calculators

### Specifications (Nice Sice, Mini Nice Sice, Hand-Held/Hard Cover)

| Model                      | EL-145A   | EL-144A  | EL-143S  |  |  |
|----------------------------|---|--|--|--|--|
| Display                    | 14  | 14   | 14   |  |  |
| 3-Digit Punctuation        | 0   | 0  | 0  |  |  |
| Memory                     | 1   | 1  | 1  |  |  |
| +Tax/-Tax Calculation      | 0/0   | 0/0  | -/-  |  |  |
| Root                       | _   |  | U  |  |  |
| Percent                    | 0   | 0  | 0  |  |  |
| Sign Change                | U   | _  | —  |  |  |
| Constant                   | U   | U  | U  |  |  |
| Auto Power Off             | U   | U  | U  |  |  |
| Double Zero Key            | U   | U  | U  |  |  |
| 2-Key Roll-Over            | 0   | 0  | 0  |  |  |
| Right Shift                | U   | U  | U  |  |  |
| Tilt Display/Slant Display | 0/-   | U/-  | -/-  |  |  |
| Hard Cover                 | _   |  | U  |  |  |
| Power Source               | Solar/LR44 x 1                                  | Solar/LR44 x 1                                   | Solar/LR1130 x 1                                 |  |  |
| Dimensions (W x D x H)     | 110 x 168 x 15 mm<br>4-11/32" x 6-5/8" x 19/32" | 102 x 148 x 15 mm<br>4-1/32" x 5-13/16" x 19/32" | 72 x 115 x 12 mm<br>2-27/32" x 4-17/32" x 15/32" |  |  |
| Weight (Approx.)           | 160 g   | 125 g  | 66 g   |  |  |



### Merchandising Information

### Quantity/CTN may differ depending on sales region.

|               |                    | INDIVII    | DUAL CAR        | TON         |             | IN       | NER CART  | ON        |          |           | MASTER          | CARTON |        |          |
|---------------|--------------------|------------|-----------------|-------------|-------------|----------|-----------|-----------|----------|-----------|-----------------|--------|--------|----------|
| MODEL         | PACKAGE            | G/W (kg)   | DIMENSIONS (mm) |             |             |          | G/W (kg)  |           |          | G/W (kg)  | DIMENSIONS (mm) |        |        |          |
|               | ТҮРЕ               | (Approx.)  | DEPTH           | WIDTH       | HEIGHT      | Q'ty/CTN | (Approx.) | M3        | Q'ty/CTN | (Approx.) | DEPTH           | WIDTH  | HEIGHT | M3       |
| Voice Record  | ers                |            |                 |             |             |          |           |           |          |           |                 |        |        |          |
| PA-VR10EPCE   | Box                | 0.15       | 175             | 98          | 32          | 10       | 1.60      | 0.007385  | 40       | 7.3       | 397             | 357    | 254    | 0.036000 |
| PA-VR5E       | Box                | 0.15       | 175             | 98          | 32          | 10       | 1.60      | 0.007385  | 40       | 7.3       | 397             | 357    | 254    | 0.036000 |
| Electronic Or | 8                  |            |                 |             |             |          |           |           |          |           |                 |        |        |          |
| ZQ-P20H       | Clamshell          | 0.45       | 263             | 196         | 52          | 10       | 4.80      | 0.023755  | 40       | 20.9      | 556             | 448    | 427    | 0.106361 |
| ZQ-P10        | Blister Pack       | 0.15       | 237             | 170         | 26          | 10       | 1.70      | 0.0125257 | 80       | 15.6      | 542             | 516    | 418    | 0.116903 |
| Scientific Ca |                    |            |                 |             |             |          |           |           |          |           |                 |        |        |          |
| EL-506WWH     | Box + Strap        | 0.19       | 161             | 83          | 30          | 10       | 2.00      | 0.004958  | 80       | 16.8      | 363             | 335    | 382    | 0.046454 |
| EL-520WWH     | Box + Strap        | 0.19       | 161             | 83          | 30          | 10       | 2.00      | 0.004958  | 80       | 16.8      | 363             | 335    | 382    | 0.046454 |
| EL-531WHWH    | Box + Strap        | 0.19       | 161             | 83          | 32          | 10       | 2.10      | 0.005266  | 80       | 17.7      | 363             | 355    | 382    | 0.049227 |
| EL-501WWH     | Box + Strap        | 0.13       | 150             | 82          | 24          | 10       | 1.50      | 0.004224  | 80       | 12.0      | 526             | 350    | 234    | 0.043080 |
| EL-5120       | Box + Strap        | 0.30       | 186+20          | 118         | 35          | 10       | 3.20      | 0.00969   | 40       | 13.8      | 414             | 386    | 300    | 0.047942 |
| Printing Calo | ulators (DES       | KTOP, SEMI | -DESKTOP        | , HAND-HE   | LD)         |          |           |           |          |           |                 |        |        |          |
| EL-2607P      | Box                | 2.47       | 438             | 265         | 136         |          | _         | _         | 6        | 16.4      | 548             | 456    | 433    | 0.108201 |
| EL-2901RH     | Box                | 1.36       | 362             | 228         | 110         | -        | —         | —         | 6        | 9.3       | 476             | 384    | 367    | 0.067082 |
| EL-2901PIII   | Box                | 1.3        | 342             | 239         | 85          | —        | —         | —         | 5        | 7.5       | 463             | 367    | 274    | 0.046558 |
| EL-1801C      | Box + Strap        | 0.80       | 297+30          | 218         | 78          |          |           | _         | 10       | 8.8       | 452             | 319    | 419    | 0.060415 |
| EL-1611P      | Box + Strap        | 0.37       | 265+35          | 125         | 55          |          | _         | —         | 10       | 4.4       | 298             | 285    | 286    | 0.024290 |
| CS-Z635RH     | Box                | 2.55       | 425             | 239         | 125         |          | _         | —         | 6        | 16.9      | 610             | 446    | 418    | 0.113721 |
| Office Calcul | ators (DESKT       | OP/SEMI-D  | ESKTOP, N       | ICE SIZE, N | IINI NICE S | IZE)     |           |           |          |           |                 |        |        |          |
| EL-2125C      | Box + Strap        | 0.26       | 199+20          | 144         | 27          | 10       | 2.70      | 0.010018  | 40       | 11.7      | 446             | 300    | 366    | 0.048971 |
| EL-338G       | Box + Strap        | 0.25       | 203+20          | 135         | 21          | 10       | 2.70      | 0.007598  | 40       | 11.3      | 454             | 240    | 348    | 0.037918 |
| EL-337C       | Box + Strap        | 0.20       | 180+20          | 112         | 26          | 10       | 2.20      | 0.007097  | 40       | 9.6       | 406             | 291    | 302    | 0.035680 |
| EL-421M       | Box + Strap        | 0.20       | 173             | 115         | 24          | 10       | 2.20      | 0.006387  | 40       | 9.6       | 388             | 270    | 308    | 0.032266 |
| EL-334F       | Box + Strap        | 0.20       | 173+20          | 115         | 24          | 10       | 2.20      | 0.006387  | 40       | 9.6       | 388             | 270    | 308    | 0.032266 |
| EL-332A       | Box + Strap        | 0.15       | 145 + 20        | 104         | 31          | 10       | 1.60      | 0.006492  | 40       | 7.2       | 340             | 338    | 286    | 0.032867 |
| EL-310A       | Box + Strap        | 0.10       | 116+20          | 90          | 23          | 10       | 1.10      | 0.003524  | 40       | 5.0       | 278             | 260    | 258    | 0.018648 |
| EL-M711G      | Window box + Strap | 0.24       | 219             | 142         | 36          | 10       | 2.67      | 0.015128  | 40       | 11.9      | 498             | 400    | 364    | 0.072509 |
| EL-M700G      | Window box + Strap | 0.17       | 183             | 128         | 32          | 10       | 1.81      | 0.010535  | 40       | 8.2       | 426             | 360    | 366    | 0.051529 |
| Personal Cal  | culators (WA)      | LLET/HAND  | -HELD, HA       | RD COVER    | CARD)       |          |           |           |          |           |                 |        |        |          |
| EL-250S       | Box + Strap        | 0.07       | 118+20          | 74          | 19          | 40       | 2.90      | 0.009955  | 160      | 12.4      | 422             | 326    | 354    | 0.048700 |
| EL-233S       | Blister Pack       | 0.05       | 180             | 122         | 14          | 40       | 2.60      | 0.012947  | 160      | 11.9      | 529             | 284    | 424    | 0.063700 |
| EL-480SR      | Box + Strap        | 0.11       | 128             | 78          | 18          | 40       | 4.60      | -         | 160      | 19.4      | 394             | 335    | 354    | 0.046724 |
| EL-W211G      | Window box + Strap | 0.12       | 183             | 106         | 16          | 40       | 4.92      | 0.018376  | 160      | 21.0      | 470             | 370    | 496    | 0.086254 |
| EL-376S       | Box + Strap        | 0.08       | 118+20          | 75          | 15          | 40       | 3.50      | 0.008087  | 160      | 14.9      | 342             | 330    | 354    | 0.039952 |
| EL-243S       | Box + Strap        | 0.07       | 108+20          | 67          | 15          | 40       | 2.20      | 0.006804  | 160      | 9.4       | 342             | 298    | 334    | 0.034040 |
| Kid´s Calcula |                    |            |                 |             |             |          |           |           |          |           |                 |        |        |          |
| EL-S10        | Blister Pack       | 0.08       | 191             | 122         | 22          | 10       | 0,95      | 0.005766  | 40       | 4.2       | 409             | 239    | 290    | 0.028348 |
| 14 Digit Calc |                    |            |                 |             |             |          |           |           |          |           |                 |        |        |          |
| EL-145A       | Box + Strap        | 0.18       | 169 + 20        | 108         | 23          | 10       | 1.90      | 0.005789  | 40       | 8.3       | 386             | 260    | 294    | 0.029506 |
| EL-144A       | Box + Strap        | 0.13       | 151+20          | 102         | 19          | 10       | 1.40      | 0.004158  | 40       | 6.0       | 350             | 220    | 282    | 0.021714 |
| EL-143A       | Box + Strap        | 0.08       | 118+20          | 75          | 15          | 40       | 3.50      | 0.008087  | 160      | 14.9      | 342             | 330    | 354    | 0.039952 |

# Merchandising Information

### Accessories and options

#### ■ AC ADAPTER Model

#### ■ HALF-SIZE RAM CARD with BATTERY Model CF-2H16M\*1

| Model               |   |  | EA- | 28A                 |   | Model CE-2H16M*1  |                                    |  |                      |                      |  |
|---------------------|---|--|-----|---------------------|---|---|------------------------------------|--|----------------------|----------------------|--|
| Applicable<br>model | EL-2626H EL-1801L<br>EL-1801C EL-1750P                  |  |     | L-1611L<br>L-1611P  |   | Applicable<br>model                                       | PC-E500S                           |  |                      |                      |  |
| INK RIB             | INK RIBBON PAPER ROLL                                   |  |     |                     |   |   |                                    |  |                      |                      |  |
| Model               | URBNT10   | 07CCZZ   |     | Model               |   | D   | DPAPR1004CSZZ <sup>*2</sup> EA-710 |  |                      |                      |  |
| Applicable<br>model | CS-4194<br>CS-4194H<br>CS-4194HC<br>CS-2195L<br>CS-2194 | EL-2631L<br>EL-2630L<br>EL-2630PII<br>EL-2615G<br>EL-2607P |     | Applicable<br>model | CS-4194<br>CS-4194H<br>CS-4194HC<br>CS-2195L<br>CS-2194 | EL-2910R<br>EL-2902C<br>EL-2901C<br>EL-2901RF<br>EL-2631L | EL-2615G                           | EL-1801C<br>EL-1801L<br>EL-1750P<br>EL-1611L<br>EL-1611P | EL-1607R<br>EL-1195L | EL-1611L<br>EL-1611P |  |

#### ■ INK ROLLER

| Model      | EA-732R           | EA-772R            | EA-781R-BK/EA-781R-RD*4             | EA-741R  |
|------------|-------------------|--------------------|-------------------------------------|----------|
| Applicable | EL-1801L EL-1611P | EL-2901RH EL-1750P | EL-2910R EL-2901C EL-1801C EL-1195L | EL-2607R |
| model      | EL-1611L          | EL-2626H           | EL-2902C EL-2195L EL-1607P          | EL-1607R |

#### ACCESSORY LINK KIT PC\_I ink Softwara & Cable

| PC-LINK SOITW       | are & Cable   |   |  |  |                                  |  |                  |       |                               |                |                  |  |
|---------------------|---|---|--|--|----------------------------------|--|------------------|-------|-------------------------------|----------------|------------------|--|
| Model               | ${f CE}{-}491 {f FD}$ (without cable) $^{*5}$   |   | CE-491W <sup>*5, 7</sup>                           |  |                                  |  |                  | CE-69 |                               |                | <b>CE-LK2</b> *5 | CE-LK1P*8                                |
| Applicable<br>model | EL-6890P <sup>*6</sup><br>EL-6790P <sup>*6</sup><br>ZQ-480P <sup>*6</sup><br>ZQ-190P <sup>*6</sup><br>ZQ-180P <sup>*6</sup> | EL-6850<br>EL-6750<br>EL-6690<br>EL-6660<br>ZQ-5900 | ZQ-5400<br>ZQ-470<br>ZQ-4600<br>ZQ-4500<br>ZQ-4400 | ZQ-4300<br>ZQ-4200<br>ZQ-4000<br>ZQ-3200<br>ZQ-3200<br>ZQ-3000 | ) ZQ-<br>) ZQ-<br>) ZQ-<br>) ZQ- | -2800<br>-2700<br>-2600<br>-2500<br>-170 | ZQ-160<br>ZQ-150 | )     | ZQ-8600<br>ZQ-6800<br>ZQ-6600 |                | EL-9900          | EL-9650<br>EL-9600<br>EL-9450<br>EL-9400 |
| Docking Statio      | n   |   |  |  | ]                                | Level (                                  | Converte         | er    |                               |                |                  |  |
| Model               | Model CE-60K*9/CE-61T*10  |   |  |  |                                  | Mode                                     | l                |       | CE-133T/CE-135T*11            |                |                  |  |
| Applicable<br>model |   | ZQ-640PC<br>ZQ-630                                  |  | C  |                                  | Applie<br>mode                           |                  |       | ZQ-8600<br>ZQ-6800            | ZQ-66<br>ZQ-62 |                  | Q-6000                                   |

#### Set-to-Set Communication Cable

| Model               |  | CE  | E-300L (4-pin)  |  | CE-451L (3-pin)                        | CE-450L (3-pin) | -450L (3-pin) CE-260L *7 (3              |  |                   |  |  |
|---------------------|--|---|---|--|--|-----------------|--|--|-------------------|--|--|
| Applicable<br>model | EL-6690<br>EL-6660<br>ZQ-650<br>ZQ-650PC<br>ZQ-640PC<br>ZQ-630 | ZQ-630PC<br>ZQ-6200<br>ZQ-5900<br>ZQ-5900<br>ZQ-570<br>ZQ-570PC | ZQ-5400<br>ZQ-470<br>ZQ-4600<br>ZQ-4500<br>ZQ-4400<br>ZQ-4300 | ZQ-4200<br>ZQ-4000<br>ZQ-3200<br>ZQ-3000<br>ZQ-2800<br>ZQ-2700 | ZQ-2600<br>ZQ-2500<br>ZQ-170<br>ZQ-150 | EL-9900         | EL-9650<br>EL-9600<br>EL-9450<br>EL-9400 | EL-6890P<br>EL-6850<br>EL-6790P<br>EL-6750<br>ZQ-480P<br>ZQ-190P | ZQ-180P<br>ZQ-160 |  |  |

\*1 CE-2H16M: 16KB \*2 5 rollk/pack, 58 (W) × 80 (ø) mm \*3 58 (W) × 25 (ø) mm \*4 EA-781R-BK: Black, EA-781R-RD: Red

 English version only.
 Use either CE-491W or CE-491FD.
 May not be available in some regions as stocks are very limited. \*8 English and French version only.

\*9 English version only. With PC Link & PIM software.

\*10 Without software. \*11 CE-133T: for IBM-PC (RS232C), CE-135T: for MAC (RS422)



# SHARP

Sharp Electronics Central & Eastern Europe, a division of Sharp Europe A-1020 Vienna, Handelskai 342, Phone: +43 / (0)1 / 7 27 19 - 0 Fax: +43 / (0)1 / 7 27 19 - 141, e-mail: marketing@scee.sharp-eu.com more info at: www.sharp-cee.com

- Design and specifications are current as of September 2005, but are subject to change without prior notice.
- All company and/or product names are trademarks and/or registered trademarks of their respective manufacturers. Sharp makes no warranties or representations of any . kind with respect to these products.
- Some peripheral products may not be available in some regions. Screen displays are simulated. Some models may not be available in some regions.
- •
- Please ask your Sharp dealer for details.

Distributed by: