



3M™ Nomad™ Entrance Matting Systems

3M™ Nomad™ Entrance Matting Systems







Table of Contents



- 3M™ Nomad™ Entrance Matting System Overview..... Page 3
- 3M™ Nomad™ Scraper Matting Page 7
- 3M™ Nomad™ Carpet Matting Page 12
- 3M™ Nomad™ Personalized Matting Page 17
- 3M™ Safety-Walk™ Wet Area Matting Page 19
- 3M™ Matting Accessory Items..... Page 20
- 3M™ Safety-Walk™ Work Area Flooring Products..... Page 22
- 3M™ Nomad™ Entrance Matting Systems Warranty Page 23



It's more than just a mat. It's a system.

The 3M™ Nomad™ Entrance Matting System is designed to stop dirt and moisture at the door, keeping floors throughout your facility clean. The system consists of several different types of mats, each doing a specific job. 3M™ Nomad™ Scrapper Matting—Vinyl Loop removes dirt and moisture from shoes before people even enter a building. 3M™ Nomad™ Scrapper Matting—Z-web collects more dirt as people pass through the foyer. Finally, 3M™ Nomad™ Carpet Matting captures dirt and moisture inside the doors. The result is cleaner-looking floors that are easier to maintain, safer for building occupants, and less likely to be damaged by tracked-in dirt.

Dirty Facts:

- It can cost more than \$500 to remove one pound of dirt after it has been tracked into a building
- Up to 24 pounds of dirt can be tracked in by just 1,000 people coming through an entrance every day over a 20-day work period



Key

ft. = mat length
% = dirt removed


Did you know...?

- Without adequate matting, 42% of a floor's finish can be removed within the first six feet of an entrance after only 1,500 people have walked in.
- 3M Nomad scrapper matting removes up to 72% more dirt than other types of entrance matting.
- The use of a 3M Nomad scrapper mat outside the door will capture up to 11 times more dirt and moisture than no mat.
- 3M Nomad carpet matting removes more combined dirt and water than other carpet matting.
- A 30-foot matting system is recommended to remove 100% of dirt from shoes.
- A combination scrapper mat and carpet mat entry system can remove up to 10 times more dirt than just a carpet mat alone.

Specific mats for specific jobs.


3M™ Nomad™ Scraper Matting—Vinyl Loop

- For placement outside entrances
- Resilient vinyl-loop construction
- Surface stays clean, minimizing tracking in of dirt and moisture
- Choice of backed or unbacked construction:
 - Backed keeps debris away from the floor in indoor areas
 - Unbacked allows dirt to flow through in outdoor areas

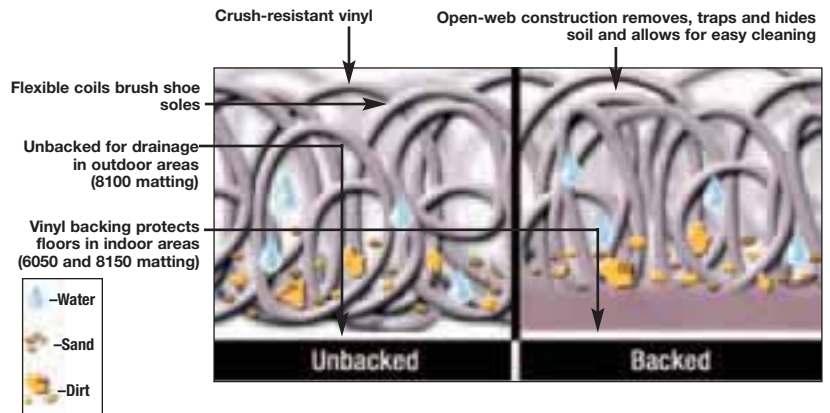


3M™ Nomad™ Scraper Matting—Z-Web

- For foyers and recessed wells
- Peaked edges scrape off dirt and debris
- Durable—won't flatten over time
- Choice of backed or unbacked construction:
 - Backed keeps debris away from the floor in indoor areas
 - Unbacked allows dirt to flow through in outdoor areas

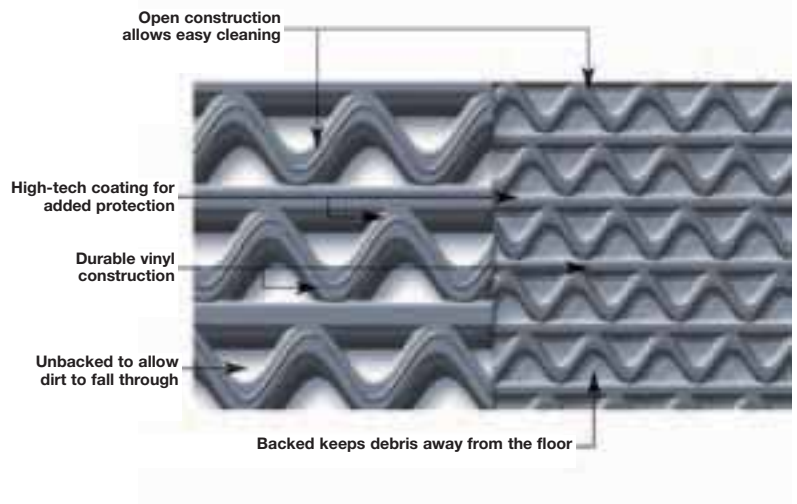

3M™ Nomad™ Carpet Matting—Dual Fiber

- For placement inside buildings
- Patented dual-fiber design:
 - coarse polypropylene fibers scrape, remove and hide small soil particles
 - fine looped nylon or polypropylene fibers wick away water
- Resists crushing and staining
- Vacuums clean
- Vinyl backing protects floors from dirt and helps reduce mat movement

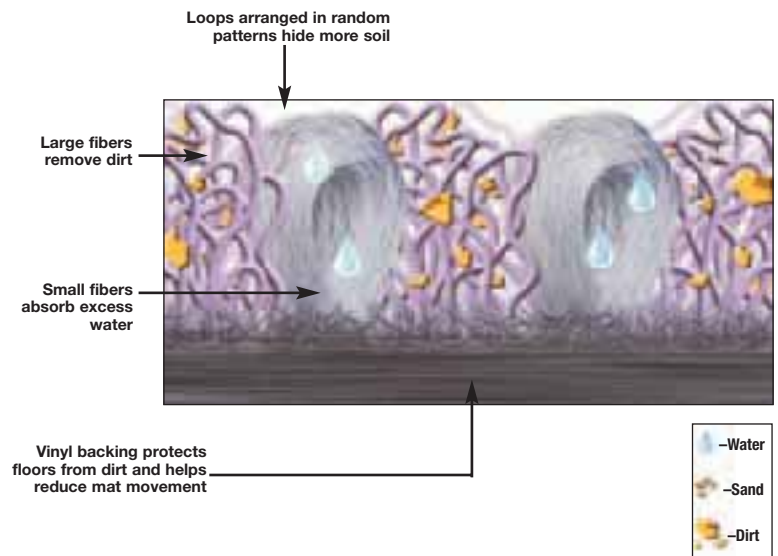

Up to 24 pounds of dirt can be tracked into a building over a 20-day period.

Most mats remove dirt and sand from shoes. However, the dirt often remains on the mat's surface where it can easily be tracked into the building. 3M™ Nomad™ Entrance Matting removes dirt and sand from shoes and hides it below the surface of the mat—so it never enters the building. Dirt that accumulates inside the mat can be

hosed off (scraper matting) or vacuumed away (carpet matting). Up to 11 times more dirt can be captured by using a 3M Nomad scraper mat outside the entrance.

Superior protection against dirt and sand.



With most mats, dirt and sand remain on the surface and can easily be tracked into the building.



The open construction of 3M™ Nomad™ Scraper Matting traps and hides dirt and sand below the surface.

Superior management of tracked in water.







Many carpet-type mats get waterlogged easily. The water that pools on the mat's surface can get tracked into the building, where it can damage floors or cause slips and falls.



The open construction of 3M™ Nomad™ Carpet Matting allows water to flow through the mat away from foot traffic.

Your traffic level will determine which matting to use.

	Light Traffic (up to 100,000 people/year)	Medium Traffic (up to 400,000 people/year)	Heavy Traffic (up to 1 million people/year)	Extreme Traffic (over 1 million people/year)
3M™ Nomad™ Scraper Matting—Vinyl Loop 		3M™ Nomad™ Medium Traffic Backed Scraper Matting 6050	3M™ Nomad™ Heavy Traffic Scraper Matting 8100/8150	
3M™ Nomad™ Scraper Matting—Z-web 		3M™ Nomad™ Medium Traffic Backed Z-Web Scraper Matting 6250		3M™ Nomad™ Extreme Traffic Z-Web Scraper Matting 9100 (recessed wells)
3M™ Nomad™ Carpet Matting 	3M™ Nomad™ Carpet Matting 4000	3M™ Nomad™ Medium Traffic Carpet Matting 6500	3M™ Nomad™ Heavy Traffic Carpet Matting 8850	3M™ Nomad™ Extreme Traffic Wall-to-Wall Carpet Matting 9800 (install)
3M™ Nomad™ Specialty Matting 		3M™ Nomad™ Printed Carpet Matting 6600		


Recommended placement of 3M matting within your building.

The strategic placement of mats is essential for maximum effectiveness. Consider both the traffic level and environmental exposure when selecting the best type of matting to use in a specific location.



For other suggested floor plans see Web site (www.3M.com/commcare) Entrance Matting, Virtual Product Selector


3M™ Nomad™ Scraper Matting

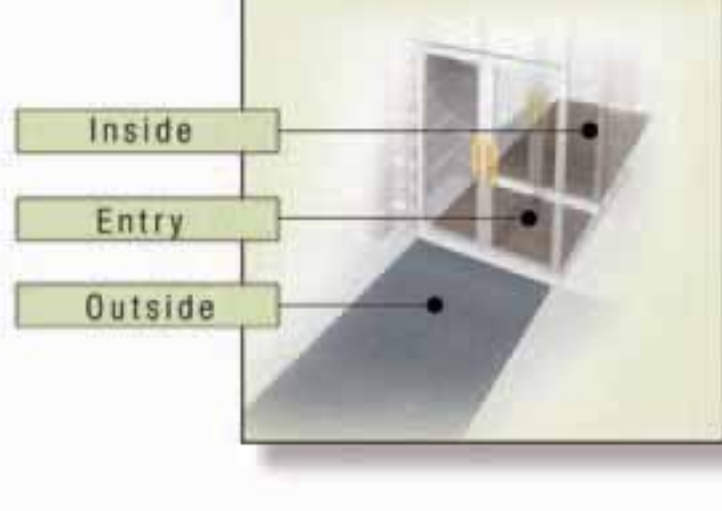

3M™ Nomad™ Scraper Matting—Vinyl-loop and 3M™ Nomad™ Scraper Matting—Z-web are the first two mats in the 3M™ Nomad™ Entrance Matting System. Their job is to trap dirt and moisture before it gets in the door. Vinyl-loop scraper matting is most effective when used outside entrances or in recessed wells. The backed products are also suitable for inside. Vinyl backing will not stain flooring. Z-web scraper matting is designed for foyers, recessed wells or interior spill areas. When used together, they can capture as much as 86% of tracked-in debris.

3M Nomad scraper matting systems:


- Continually provide a cleaner floor at the entrance and throughout the facility
- Help protect the floor from damage due to tracked-in soil so floors maintain their good looks longer
- Reduce the time and effort needed to clean and maintain floors
- Help eliminate dirt or water on hard floors so there is less chance of slips and falls
- Offer easy maintenance—clean by simply shaking the mat or washing off with a hose

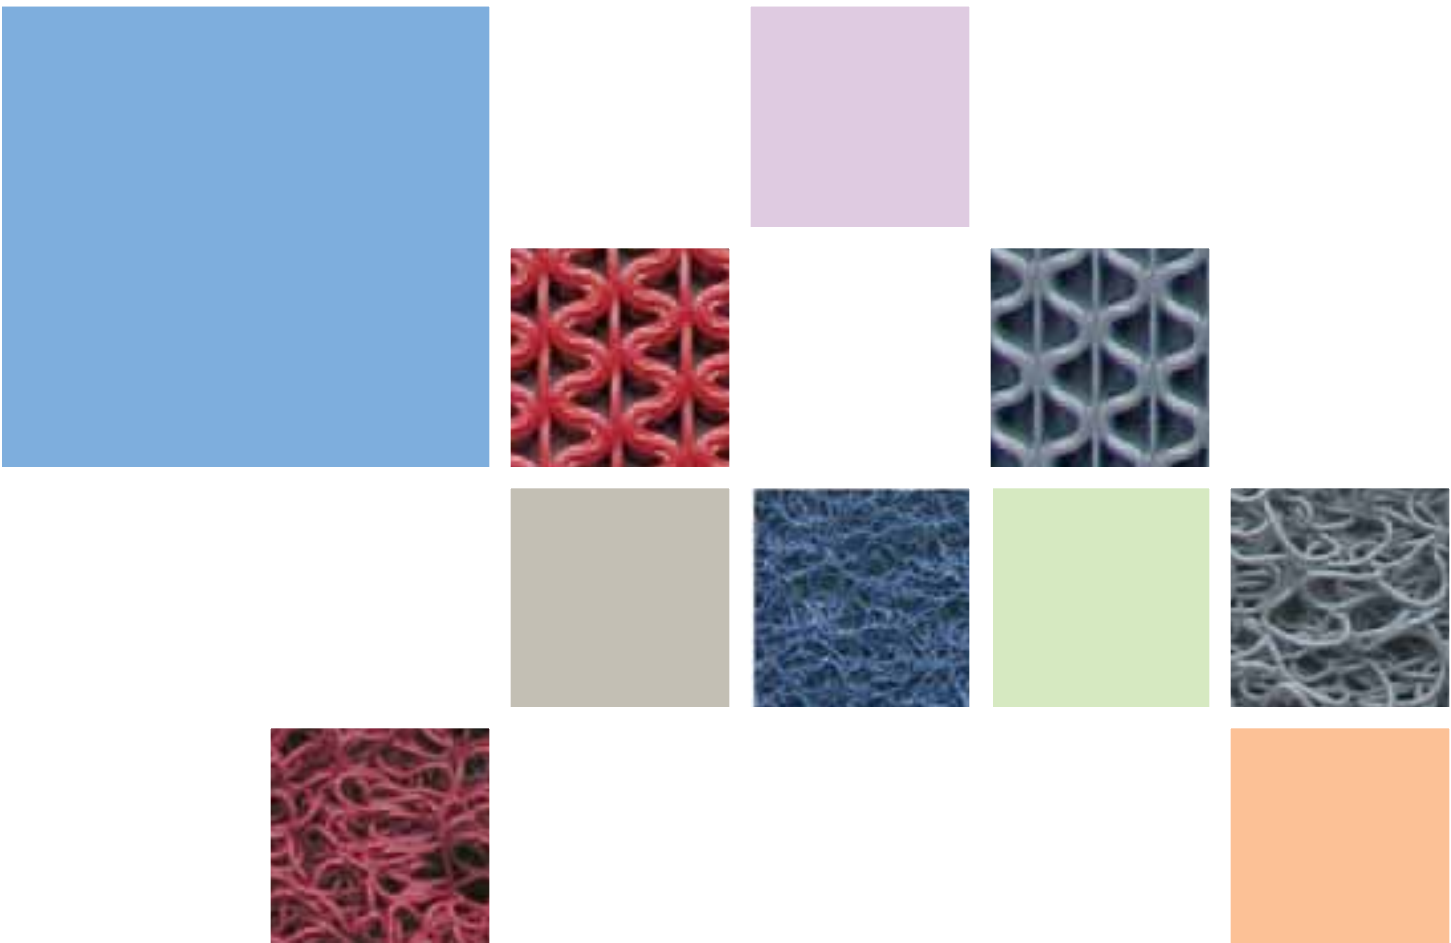

3M™ Nomad™ Medium Traffic Backed Scraper Matting 6050

Vinyl-loop, backed, medium-traffic scraper matting

- For placement outside or inside facility entrances
- Vinyl loops scrape dirt and moisture off shoes, allowing it to fall into the mat and not be tracked into the building
- Durable vinyl construction performs even in extreme temperatures from -100°F to 1500°F (-230°C to 650°C), will not fade when exposed to sunlight, and doesn't absorb water
- Suitable for medium traffic conditions

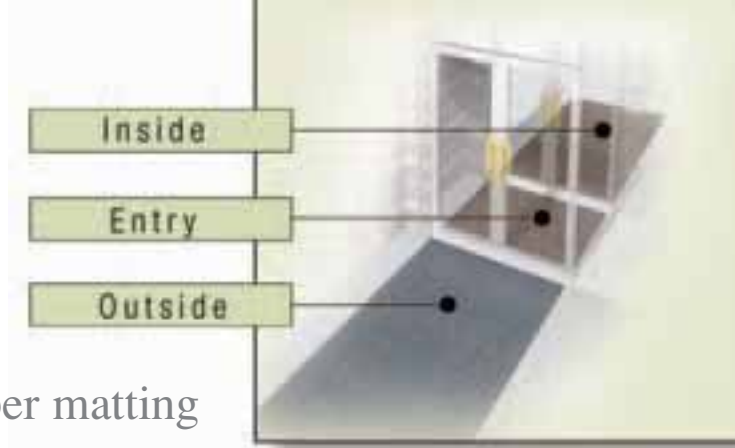

Product Specifications

Traffic Grade: Medium; up to 400,000 people per year—foot or lightweight-wheeled traffic (not large vehicles or heavy machinery)

Applications: Interior or exterior facility entrances

Material: Backed, vinyl coiled-web

Colors: Blue, Dark Brown (Chestnut), Ebony, Forest, Gray (Slate), Light Brown (Dove), Red

Sizes:

Small mats with 4-side edging:

22 inches x 34 inches, 3 feet x 5 feet and 4 feet x 6 feet (55cm x 86cm, 0.9m x 1.5m and 1.2m x 1.8m)

Standard mats with nosing on width ends only:

3 feet x 10 feet (0.9m x 3.0m): Gray (Slate) and Light Brown (Dove) only

Standard mats without nosing:

3 feet x 20 feet and 4 feet x 20 feet (0.9m x 6.0m and 1.2m x 6.0m): Blue, Ebony, Forest, Gray (Slate) and Light Brown (Dove) only

Custom lengths:

Widths: 3 feet or 4 feet (0.9m or 1.2m)

Lengths: 2 feet to 40 feet in 1-foot increments (0.6m to 12.1m in 0.3m increments)



Custom cuts:

Widths: 2 feet to 12 feet (0.6m to 3.6m)

Lengths: 2 feet to 60 feet (0.6m to 18.2m)

Thickness: 0.45 inches (11mm)

Fire Retardancy:

Test method

DOC FF 1-70

ASTM E-648

NFPA-253

Value

Passes

Passes

0.81 watts/cm² (no ignition)

Electrical Properties:

Test method

Static Propensity

AATCC-134

Value

1.5kV Neolite Soles





Microbial Properties:

Test method


ASTM G-21-96

Rating

Inhibiting to fungal growth



3M™ Nomad™ Medium Traffic Backed Z-Web Scraper Matting 6250

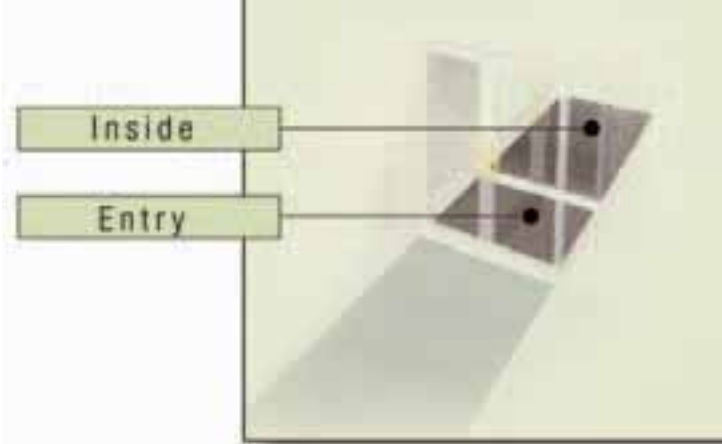

- Ideal for indoor entrance, foyer and spill areas
- Peaked edge design provides a skid-resistant surface while scraping dirt and debris from shoes. The design also allows the mat to trap moisture more effectively, making it ideal for drink stations and fountains
- Vinyl backing will not stain the floor and keeps dirt and moisture from falling through to the floor underneath
- Durable Z-web construction provides excellent support for light wheeled traffic such as carts and wheelchairs
- Suitable for medium traffic conditions

Product Specifications

Traffic Grade: Medium; up to 400,000 people per year – foot or lightweight wheeled traffic (not large vehicles or heavy machinery)

Applications: Interior facility entrances

Material: Backed, vinyl, Z-web

Colors: Granite, Mocha

Sizes:

Small mats with 4-side edging:
3 feet x 5 feet or 4 feet x 6 feet
(0.9m x 1.5m or 1.2m x 1.8m)

Custom Lengths:

Widths: 3 feet or 4 feet
(0.9m or 1.2m)

Lengths: 2 feet to 30 feet in 1-foot increments
(0.6m to 9.1m in 0.3m increments)

Thickness: 0.20 inches (5.0mm)

Fire Retardancy:


Test method	Value
DOC-FF-1	Passes
ASTM E-648	0.90 watts/cm ²

Microbial Properties:



Test method	Rating
ASTM G-21-96	Inhibiting to fungal growth

Electrical Properties:



Test method	Value
Static Propensity	1.6kV Neolite Soles
AATCC-134	



Granite




Mocha



3M™ Nomad™ Heavy Traffic Unbacked Scraper Matting 8100

3M™ Nomad™ Heavy Traffic Backed Scraper Matting 8150

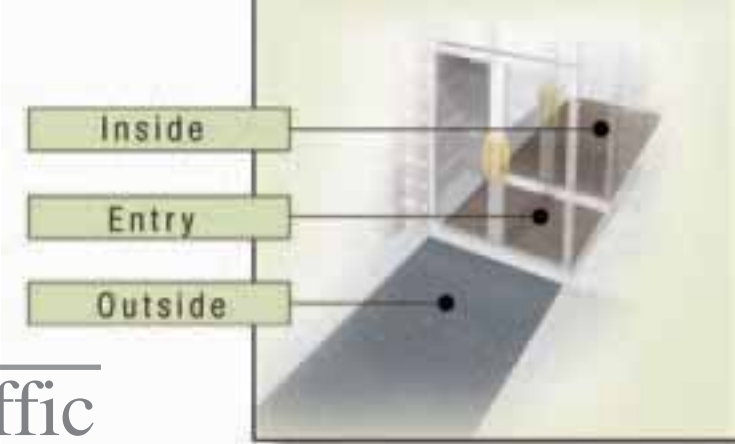

- *Unbacked Scraper Matting 8100* is designed for exterior facility entrances or recessed wells
- *Backed Scraper Matting 8150* is designed for exterior or interior facility entrances or recessed wells
- Vinyl loops scrape dirt and moisture from shoes and trap them in the mat so they're not tracked into the building
- Suitable for heavy traffic conditions
- Provides resistance to grease and oil
- Unique finish in a variety of popular colors

Product Specifications

Traffic grade: Heavy; up to one million people per year—foot or lightweight-wheeled traffic (not large vehicles or heavy machinery)

Applications: **8100**—Exterior facility entrances or recessed wells; **8150**—Interior or exterior facility entrances or recessed wells

Material: **8100**—Unbacked, vinyl, coiled-web; **8150**—Backed, vinyl coiled-web with oil and grease resistance

Colors: Blue, Dark Brown (Chestnut), Ebony, Forest, Gray (Slate), Light Brown (Dove), Red

Sizes:

8100—Small mats with nosing on width ends only:

3 feet x 5 feet or 4 feet x 6 feet (0.9m x 1.5m or 1.2m x 1.8m): All colors

8150—Small mats with 4-side edging:

3 feet x 5 feet or 4 feet x 6 feet (0.9m x 1.5m or 1.2m x 1.8m)

Standard mats without nosing 8100 & 8150:

3 feet x 20 feet or 4 feet x 20 feet (0.9m x 6.0m or 1.2m x 6.0m): Slate (gray) and Dove (brown) only

Custom lengths 8100 & 8150:

Widths: 3 feet or 4 feet (0.9m or 1.2m)

Lengths: 2 feet to 30 feet in 1-foot increments (0.6m to 9.1m in 0.3m increments)

8100—Custom cuts:

Widths: 2 feet to 12 feet (0.6m to 3.6m)

Lengths: 2 feet to 60 feet (0.6m to 18.2m)

Thickness: 0.55 inches (13.9mm)

Fire Retardancy:

Test method	Value
DOC FF 1-70	Passes
ASTM E-648	Passes
NFPA-253	Passes

Microbial Properties:

Test method	Rating
ASTM G-21-96	Inhibiting to fungal growth


Electrical Properties:

Test method	Value
Static Propensity	1.4kV Neolite soles
AATCC-134	


Chemical Resistance:*

Gasoline	Good
Motor Oil	Excellent
Transmission Fluid	Excellent


* Resists most chemicals. See technical data sheet for details.




Red




Light Brown (Dove)



Ebony



Forest



Dark Brown (Chestnut)




Gray (Slate)



Blue

3M™ Nomad™ Extreme Traffic Z-Web Unbacked Scraper Matting 9100

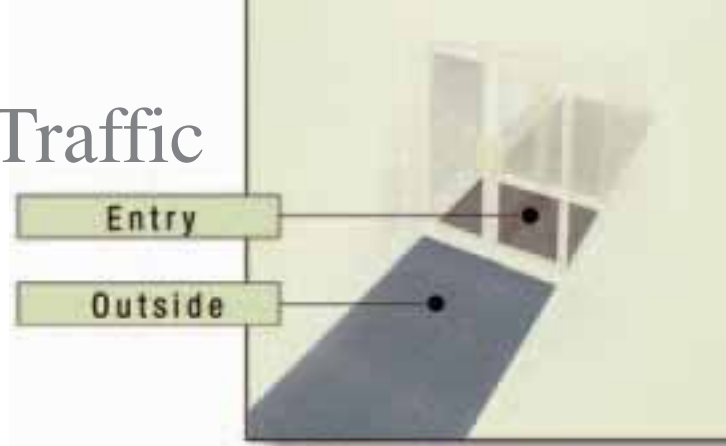

- Designed for outdoor and recessed well areas
- Peaked edge design provides a skid-resistant surface while scraping dirt and debris from shoes
- Unbacked construction allows dirt and moisture to fall through the mat, preventing them from being tracked into the building and making cleaning easier
- Durable, Z-web construction provides excellent support for light wheeled traffic such as shopping carts and wheelchairs
- Suitable for even the heaviest traffic conditions

Product Specifications

Traffic Grade: Extreme; any level of foot or lightweight wheeled traffic (not large vehicles or heavy machinery)

Applications: Exterior facility entrances or recessed walls

Material: Unbacked, vinyl, Z-web
Colors: Ebony, Granite, Mocha

Sizes:

Standard sizes without nosing:

2 feet x 10 feet, 2 feet x 20 feet, 3 feet x 5 feet and 3 feet x 20 feet (0.6m to 3.0m, 0.6m x 6.0m, 0.9m x 1.5m and 0.9m x 6.0m)

Custom lengths without edging (for recessed well applications):

Widths: 2 feet or 3 feet (0.6m or 0.9m)
Lengths: 2 feet to 30 feet in 1-inch increments (0.6m to 9.1m in 25mm increments)

Custom cuts with 4-side edging (for non-recessed well applications):

Widths: 2 feet to 12 feet (0.6m to 3.6m)
Lengths: 2 feet to 30 feet (0.6m to 9.1m)

Thickness: 0.45 inches (11.4mm)

Fire Retardancy:


Test method	Value
DOC-FF-1-70	Passes
ASTM E-648	0.82 watts/cm ²

Microbial Properties:



Test method	Rating
ASTM G-21-96	Inhibiting to fungal growth

Electrical Properties:



Test method	Value
Static Propensity AATCC-134	1.2kV Neolite soles



Granite




Mocha



Ebony

3M™ Nomad™ Carpet Matting

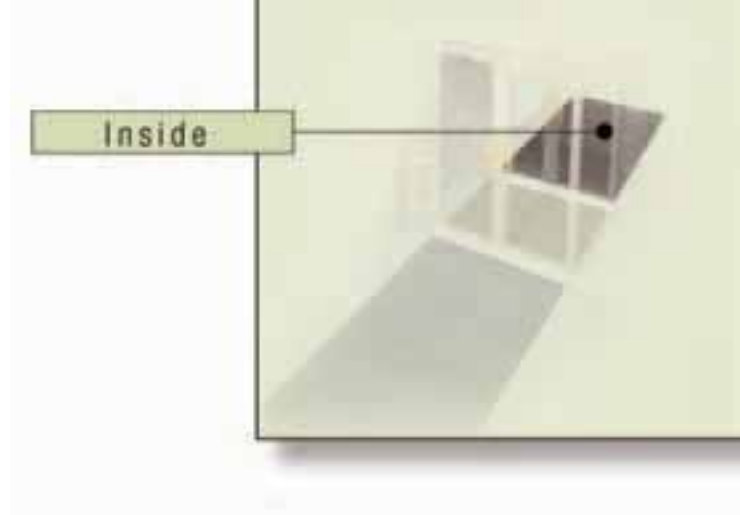

3M™ Nomad™ Carpet Matting features a patented dual-fiber design: large, crush-resistant polypropylene fibers scrape, remove and hide loose dirt; and small nylon fibers wick away water. It is best used as the last mat in a 3M™ Nomad™ Entrance Matting System. When used together with 3M™ Nomad™ Scraper Matting, 3M Nomad carpet matting can capture virtually 100% of tracked-in debris and moisture.


3M Nomad carpet matting:

- Continually provides a cleaner floor at the entrance and throughout the facility
- Captures up to 48% more dirt than conventional carpet mats
- Helps protect floors from damage due to tracked-in soil or debris
- Reduces time and effort needed to clean and maintain floors
- Helps eliminate dirt and water on hard floors so there is less chance of slips and falls
- Offers easy clean-up—vacuum, extract and maintain as you would any other carpet



3M™ Nomad™ Carpet Matting 4000

Inside

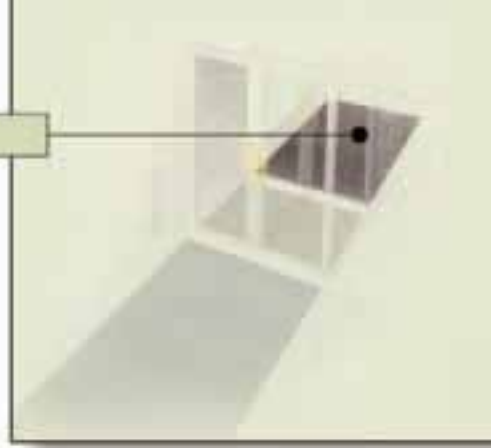

- Excellent all-purpose mat
- For placement inside entrances
- Vinyl backing will not stain the floor and prevents moisture from falling through the mat to the floor underneath
- Attractive ribbed design
- Suitable for light traffic conditions

Product Specifications

Traffic Grade: Light; up to 50,000 people per year—foot or lightweight wheeled traffic (not large vehicles or heavy machinery)

Applications: Interior facility entrances

Material: Backed, dual-fiber, ribbed design, polypropylene fibers

Colors: Brown, Charcoal, Cranberry, Hunter Green, Light Gray

Sizes:

Standard mats with 4-side edging:
2 feet x 3 feet, 3 feet x 5 feet, 3 feet x 10 feet, 4 feet x 6 feet and 4 feet x 10 feet
(0.6m x 0.9m, 0.9m x 1.5m, 0.9m x 3.0m, 1.2m x 1.8m and 1.2m x 3.0m)

Custom lengths with 4-side edging:



Widths: 3 feet, 4 feet or 6 feet
(0.9m, 1.2m or 1.8m)

Lengths: 2 feet to 60 feet in 1-foot increments (0.6m to 18.2m in 0.3m increments)

Thickness: 0.3 inches (7.8mm)

Fire Retardancy:


Test method	Value
DOC-FF-1-70	Passes



Brown



Light Gray




Hunter Green




Charcoal



Cranberry



3M™ Nomad™ Medium Traffic Carpet Matting 6500

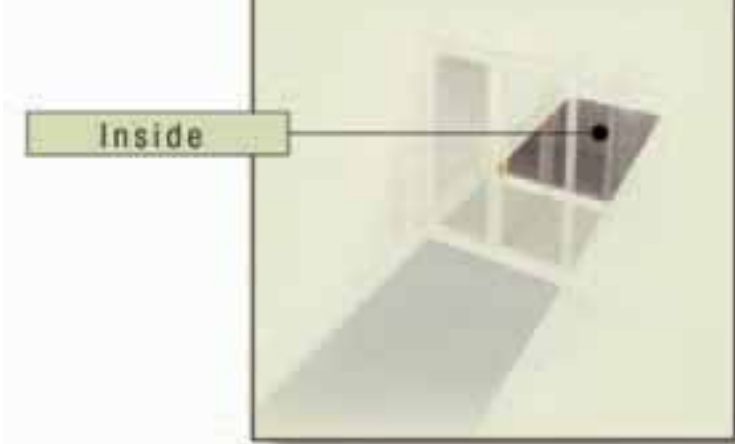

- For placement inside entrances
- Vinyl backing will not stain the floor and prevents moisture from falling through the mat to the floor underneath
- Checkerboard pattern provides an attractive appearance
- Suitable for medium traffic conditions

Product Specifications

Traffic Grade: Medium; up to 400,000 people per year—foot or lightweight wheeled traffic (not large vehicles or heavy machinery)

Applications: Interior facility entrances

Material: Backed, dual-fiber, square-pattern, polypropylene fibers

Colors: Brick, Light Brown (Dove), Ebony, Gray (Slate)

Sizes:

Small mats with 4-side edging:

2 feet x 3 feet, 3 feet x 5 feet and 4 feet x 6 feet (0.6m x 0.9m, 0.9m x 1.5m and 1.2m x 1.8m)

Custom lengths with 4-side edging:

Widths: 3 feet, 4 feet or 6 feet (0.9m, 1.2m or 1.8m)

Lengths: 2 feet to 60 feet in 1-foot increments (0.6m to 15.2m in 0.3m increments)







Thickness: 0.32 inches (8.1mm)

Fire Retardancy:

Test method	Value
DOC-FF-1-70	Passes


Electrical Properties:

Test method	Value
Static Propensity AATCC-134	0.5kV Neolite Soles



3M™ Nomad™ Heavy Traffic Carpet Matting 8850

Inside

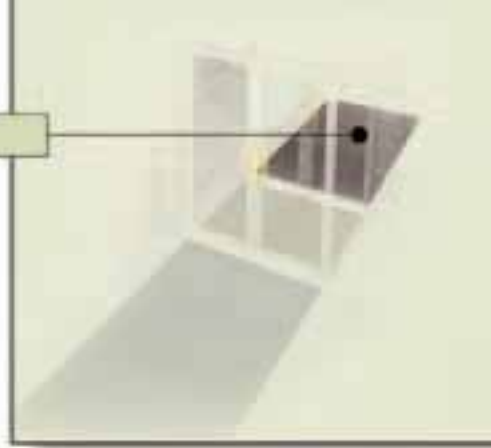

- For placement inside entrances
- Random pattern provides an attractive look and allows sand, salt and dirt to blend in until it can be removed
- Solution-dyed fibers resist fading and staining and keep the mat looking good longer
- Vinyl backing will not stain floor and prevents dirt and moisture from falling through the mat onto the floor underneath
- Low profile allows foot, cart and wheelchair traffic to move easily over the mat
- Suitable for even the heaviest traffic conditions

Product Specifications

Traffic Grade: Heavy; up to one million people per year—foot or lightweight wheeled traffic (not large vehicles or heavy machinery)

Applications: Interior facility entrances

Material: Backed, dual-fiber, random-pattern polypropylene and nylon fibers

Colors: Blueberry, Burgundy, Checkers (Gray/Red mix), Ebony, Gray (Slate), Light Brown (Dove), Spruce

Sizes:

Standard mats with 4-side edging:

2 feet x 3 feet, 3 feet x 5 feet, 3 feet x 10 feet, 4 feet x 6 feet, 4 feet x 8 feet, 4 feet x 10 feet and 6 feet x 10 feet (0.6m x 0.9m, 0.9m x 1.5m, 0.9m x 3.0m, 1.2m x 1.8m, 1.2m x 2.4m, 1.2m x 3.0m and 1.8m x 3.0m)

Custom lengths with 4-side edging:

Widths: 3 feet, 4 feet or 6 feet (0.9m, 1.2m and 1.8m)

Lengths: 2 feet to 60 feet in 1-foot increments (0.6m to 15.2m in 0.3m increments)

Custom cuts with 4-side edging:

Widths: 2 feet to 11-1/2 feet (0.6m to 3.5m)

Lengths: 2 feet to 60 feet (0.6m to 18.2m)







Thickness: 0.32 inches (8.1mm)

Fire Retardancy:


Test method	Value
DOC-FF-1-70	Passes

Electrical Properties:

Test method	Value
Static Propensity AATCC-134	1.9kV Neolite Soles



3M™ Nomad™ Extreme Traffic Wall-to-Wall Carpet Matting 9800

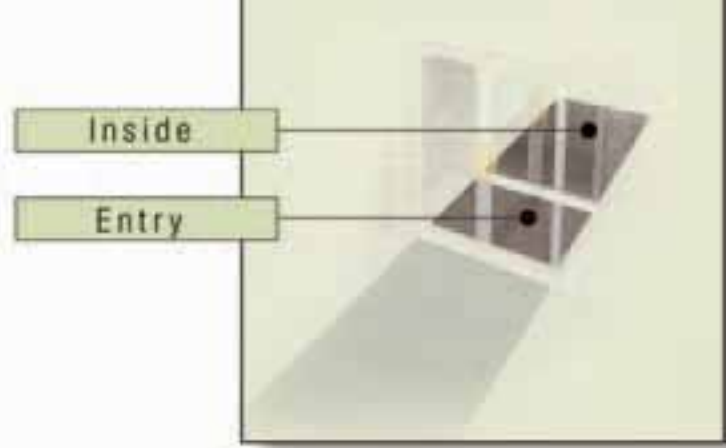

- Designed for large indoor entrance areas, including wall-to-wall applications
- Random pattern provides an attractive appearance and allows sand, salt and dirt to blend in until it can be removed
- Solution-dyed fibers resist fading and staining and keep the mat looking good longer
- Multicoated, fiberglass-reinforced vinyl backing provides a water barrier for the floor, helping prevent mold, mildew, fungus and water damage
- Low profile allows foot, cart and wheelchair traffic to move easily over the mat
- Suitable for even the heaviest traffic conditions

Note: This product comes in 74" wide rolls and is untrimmed. The useable width is 72". Professional installation is recommended.

Product Specifications

Traffic grade: Extreme; any level of foot or lightweight wheeled traffic (not large vehicles or heavy machinery)

Applications: Interior facility entrances

Material: Tufted construction with random design of two different-sized fibers for excellent dirt removal, water pickup and holding capacity

Large fibers: polypropylene

Small fibers: nylon

Backing: reinforced, solid vinyl

Color: Ebony

Pattern: Random

Sizes

Width: 72 inches (188cm) usable width, untrimmed

Length: 2 feet to 50 feet in 1-foot increments (0.6m to 15.2m in 0.3m increments)

Matting can be seamed.

Note: This product is 74 inches wide and untrimmed. It has a usable width of 72 inches. Professional installation is recommended.

Thickness: .32 inches (8.1 mm)

Fire Retardancy


Test method	Value
DOC-FF-1 (Pill Test)	Passes
ASTM E-648	Passes – Class I
NFPA-253	Passes – Class I
FTM-373	Passes – Class I

Moisture Penetration

Test method:	T-305
Cycles:	10,000 cycles with no penetration
Rating:	No transfer



3M™ Nomad™ Printed Carpet Matting 6600

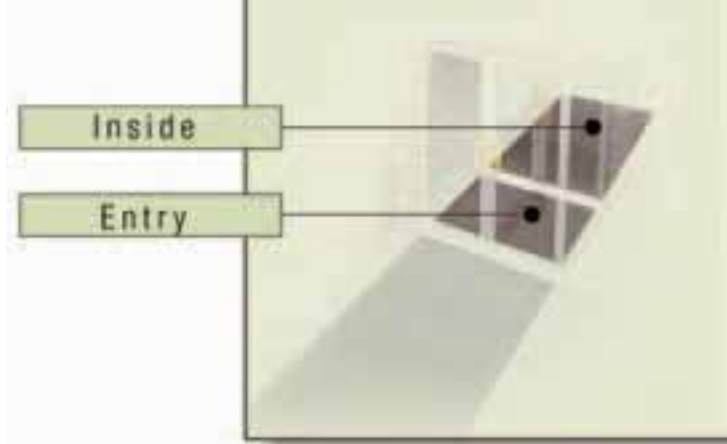

- Allows you to print your logo, a message or virtually any custom graphics on a high performing product
- Features a patented blend of different sized nylon fibers with a subtle ribbed background design that provides exceptional dirt and water removal
- Vinyl backing will not stain floor and prevents dirt and moisture from falling through the mat onto the floor underneath
- For placement inside entrances
- Suitable for medium traffic levels

Product Specifications

Available Mat Widths: 34 inches, 46 inches or 70 inches

Available Mat Lengths: 2 feet to 60 feet in 1-foot increments

Available Mat Colors: See order form grid for standard color selections.

Custom colors are available. Provide colors for custom color matching. Almost any color or color combinations can be used; however, we cannot guarantee exact color matching.

Printed Graphics Area: Printed area will be sized proportionally for requested mat size.

Edging: Four-sided integral edging.

Lead Time: Six (6) weeks from the time that final artwork is approved and the order is placed with 3M.


Artwork Requirements: To get artwork requirements faxed directly to you, call Fax-On-Demand at 1-800-978-9654 and request document #6021.



Almost any color or color combinations can be used. However, we cannot guarantee exact color matching.



3M™ Nomad™ Embossed Scraper Matting

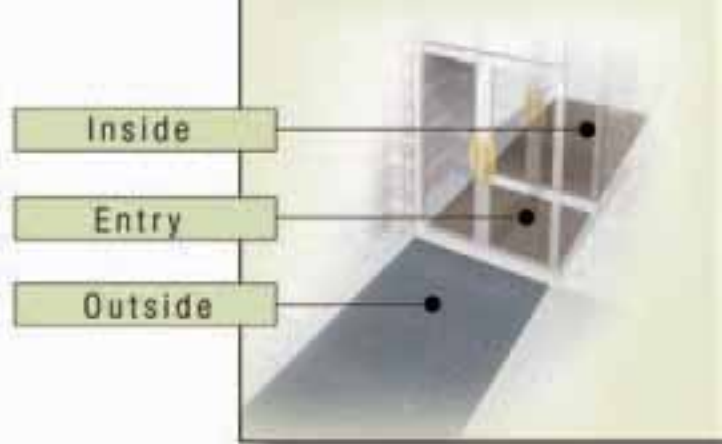

3M™ Nomad™ Scraper Matting
6050, 8100, 8150

3M™ Nomad™ Medium Traffic
Backed Scraper Matting 6250


- An economical personalization method to get your name, slogan or message in front of people
- The desired image is produced by melting the matting surface under heat and pressure—the resulting image is the same color as the mat
- Available in vinyl loop and Z-web scraper mats, backed and unbacked
- Mats available for medium and heavy traffic areas



Red



Light Brown
(Dove)



Ebony



Gray
(Slate)




Forest




Blue



Dark Brown
(Chestnut)



Mocha



Granite

Product Specifications

3M™ Nomad™ Scraper Matting 6050

Available mat widths: 3 feet or 4 feet

Available mat lengths: 2 feet to 10 feet in 1-foot increments

Available mat colors: Blue, Dark Brown (Chestnut), Light Brown (Dove), Ebony, Forest, Gray (Slate), Red

Available Embossing Graphics Colors: Image is same color as mat.

Standard Embossing Graphics Area: Maximum overall impression size is 22 inches x 27 inches; maximum amount of impression area (not overall dimension) is 120 square inches. Recommended impression widths for mat size: 2 foot mat length: 20 inch impression width; 3 foot mat or 4 foot mat width: 27 inch impression width.

Standard Embossing Logo Positions: Portrait or landscape positions are standard. Custom positions and designs are available if detailed artwork is provided.

Edging: Four-sided integral edging on 22 inch x 34 inch, 3 foot x 5 foot and 4 foot x 6 foot mats; for all other lengths, two-sided integral edging is available upon request on the short ends only. Specify two-sided integral edging on the short ends if desired.

Lead time*: Two (2) weeks for existing artwork. For new artwork, three (3) weeks from the time the final artwork is approved and the order is placed with 3M.

3M™ Nomad™ Scraper Matting 8100 and 8150

Available mat widths: 3 feet or 4 feet

Available mat lengths: 2 feet to 10 feet in 1-foot increments

Available mat colors: Blue, Dark Brown (Chestnut), Light Brown (Dove), Ebony, Forest, Gray (Slate), Red

Available Embossing Graphics Colors: Image is same color as mat.

Standard Embossing Graphics Area: Maximum overall impression size is 22 inches x 27 inches; maximum amount of impression area (not overall dimension) is 120 square inches. Recommended impression widths for mat size: 2 foot mat length: 20 inch impression width; 3 foot mat or 4 foot mat width: 27 inch impression width.

Standard Embossing Logo Positions: Portrait or landscape positions are standard. Custom positions and designs are available if detailed artwork is provided.

Edging: 8100 (Unbacked) Two-sided integral edging on short ends only of 3 foot x 5 foot and 4 foot x 6 foot mats; for all other lengths, two-sided integral edging is available upon request on the short ends only. Specify two-sided integral edging on the short ends if desired. **8150 (Backed)** Four-sided integral edging on 3 foot x 5 foot and 4 foot x 6 foot mats; for all other lengths, two-sided integral edging is available upon request on the short ends only. Specify two-sided integral edging on the short ends if desired.

Lead time*: Two (2) weeks for existing artwork. For new artwork, three (3) weeks from the time the final artwork is approved and the order is placed with 3M.

3M™ Nomad™ Scraper Matting 6250

Available mat widths: 3 feet or 4 feet

Available mat lengths: 2 feet to 10 feet in 1-foot increments

Available mat colors: Granite and Mocha

Available Embossing Graphics Colors: Image is same color as mat.


Standard Embossing Graphics Area: Maximum overall impression size is 22 inches x 27 inches; maximum amount of impression area (not overall dimension) is 120 square inches. Recommended impression widths for mat size: 2 foot mat length: 20 inch impression width; 3 foot or 4 foot mat width: 27 inch impression width.

Standard Embossing Logo Positions: Portrait or landscape positions are standard. Custom positions and designs are available if detailed artwork is provided.

Edging: Four-sided integral edging on 3 foot x 5 foot and 4 foot x 6 foot mats; for all other lengths, two-sided integral edging is standard on the long ends. Two-sided integral edging on the short ends is available upon request. Specify two-sided integral edging on the short ends if desired.

Lead time*: Two (2) weeks for existing artwork. For new artwork, three (3) weeks from the time the final artwork is approved and the order is placed with 3M.

3M™ Safety-Walk™ Wet Area Matting

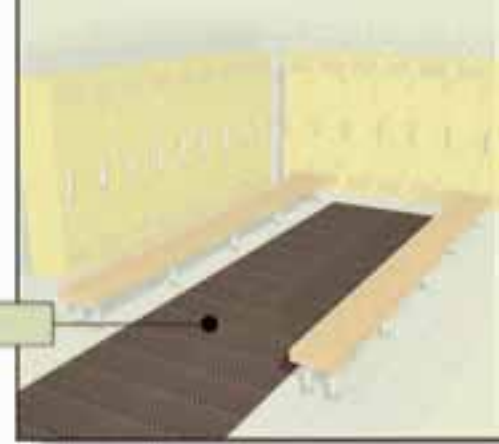

- Open construction allows water to drain through, helping keep surfaces drier
- Improves slip resistance, helping reduce falls around pools, whirlpools, locker rooms, saunas and shower areas
- Antimicrobial coating provides resistance to mildew, fungus and odors in the mat
- Easy to maintain—clean by shaking or washing with a hose or power washer

3M™ Safety-Walk™ Medium Traffic Wet Area Matting 1500

- Cushioned vinyl loops provide a comfortable surface for barefoot traffic
- Coiled vinyl loops reduce impact of dropped items that may otherwise shatter and be a danger to barefoot traffic

Colors: Blueberry, Spruce

Standard Sizes: 3' x 20'

Custom Sizes: Width: 3'

Length: 2' to 40' in 1' increments

3M™ Safety-Walk™ Heavy Traffic Wet Area Matting 3200

- Z-web design provides uniform foot support
- Durable—won't flatten over time

Colors: Horizon Blue, Wheat

Standard Sizes: 3' x 10', 3' x 20'

Custom Sizes: Width: 3'

Length: 2' to 30' in 1' increments

Product Specifications

3M™ Safety-Walk™ Wet Area Matting 1500

Property	Value (typical)
Weight (minimum) ASTM D-418-68	3.3 lb/yd ² (1.8 kg/m ²)
Thickness (minimum) ⁽¹⁾ ASTM D-418-68	0.41 inches (10.3mm)
Microbiological properties ASTM G-21-90	Inhibiting to fungal growth
Flammability DOC FF 1-70 (Pill Test)	Passes
Chemical Resistance: ⁽²⁾	
Water	Excellent ⁽³⁾
1% Soap	Excellent
60% Ethyl Alcohol	Good
Hydrocarbon Solvents ⁽⁴⁾	Poor
Chlorinated Hydrocarbon Solvents ⁽⁵⁾	Poor
Gasoline	Poor
Cooking Oil ⁽⁶⁾	Poor
5% Acetic Acid	Excellent
6% Sodium Hydroxide	Excellent

⁽¹⁾ Product may be compressed in package. Thickness is manufactured loft before packaging.

⁽²⁾ All tests seven (7) days @ 72°F (22°C) unless otherwise noted.

⁽³⁾ Excellent – slight effect on product, less than 1% weight loss.

Good – product stiffens or discolors slightly, less than 3% weight loss.

Poor – product becomes unsuitable for use. 3M™ Safety-Walk™ Wet Area Matting 1500 should not be used where it will regularly contact these chemicals.

⁽⁴⁾ Mineral Spirits

⁽⁵⁾ Methylene Chloride, Perchloroethylene, Chloroform

⁽⁶⁾ Peanut Oil

3M™ Safety-Walk™ Wet Area Matting 3200

Property	Value (typical)
Weight (minimum) ASTM D-418-68	6.25 lb/yd ² (3.4 kg/m ²)
Thickness (minimum) ⁽¹⁾ ASTM D-418-68	0.2 inches (5mm)
Width (minimum)	35.8 inches (0.91m)
Flammability DOC FF 1-70 (Pill Test)	Passes
ASTM E-648 Flooring Radiant Panel Test	>1.0 watts/cm ² (no ignition)
Microbiological properties ASTM G-21-90	Inhibiting to fungal growth
Electrical Properties: AATCC-134 Static Propensity	0.9kV ⁽²⁾
Extended Use Temperature	-20°F to 140°F (-29°C to 60°C)
Coefficient of Friction ASTM-D 1894 ⁽³⁾	
Dry Leather	1.2
Dry Rubber	1.1
Wet Leather	1.1
Wet Rubber	1.1
Oiled Leather	1.1
Oiled Rubber	1.0
Chemical Resistance: ⁽⁴⁾	
Degreaser Solution (non-chlorinated)	Excellent
Dishwashing Soap	Excellent
Ethylene Glycol	Excellent
Isopropyl Alcohol	Poor
Oil, Peanut	Excellent
Oil, Vegetable	Excellent
Soap Solution (1% Tide)	Excellent
Sodium Hydroxide	Excellent
Tri-Sodium Phosphate	Excellent
Water	Excellent
Water, 10% Salt	Excellent
Water 0.2% Chlorinated	Excellent


⁽¹⁾ Product may be compressed in package. Thickness is recovered loft.

⁽²⁾ Annoyance threshold is considered to be greater than 2.5kV.


⁽³⁾ Standard test method for static and kinetic coefficients of friction of plastic film and sheeting. Complete immersion for 30 days at 72°F (22°C).

⁽⁴⁾ Excellent – less than 3% dimension change and less than 5% hardness change.

Poor – more than 3% dimension change and more than 5% hardness change. Product not recommended for use.



Spruce



Blueberry



Wheat



Blue

3M™ Matting Accessory Items

3M™ Stay-in-Place Matting Tape

- Double-sided tape helps keep vinyl-backed matting in place
- Repositionable for moving or cleaning

3M™ Stay-in-Place Matting Tape 130

- Features a strong adhesive on one side that sticks to the mat backing, plus a low-tack adhesive on the opposite side
- The low-tack, repositionable adhesive keeps the mat in place on finished hard surface floors

3M™ Stay-in-Place Matting Tape 140

- Same as 130 tape, but features 3M™ Scotchmate™ Hook Fasteners that intertwine with looped carpet fibers to hold the carpet in place
- Not intended for cut-pile carpet

Product Specifications

Applications:

For 3M vinyl-backed matting in interior facility entrances that are protected from the weather; not intended for heavy cart traffic areas

Material:

130 tape—Double-coated tape. Strong adhesive (with liner) on matting side and repositionable adhesive on hard floor side

140 tape—Adhesive (with liner) on matting side and 3M™ Scotchmate™ Hook Fasteners on carpet side

Sizes:

2 inches x 10 feet (5cm x 304cm)
2 inches x 40 feet (5cm x 1219cm)

Thickness (typical):


Test method	Value
ASTM-D418	130 tape—0.011 inches (0.27mm)
	140 tape—0.038 inches (0.96mm)

Weight (typical):

Test method	Value
ASTM-D418	130 tape—13.3 oz/yd ² (450 g/m ²)
	140 tape—11.2 oz/yd ² (380 g/m ²)

Fire Retardancy:

Test method	Value
DOC-FF-1-70	130 tape—passes
	140 tape—passes

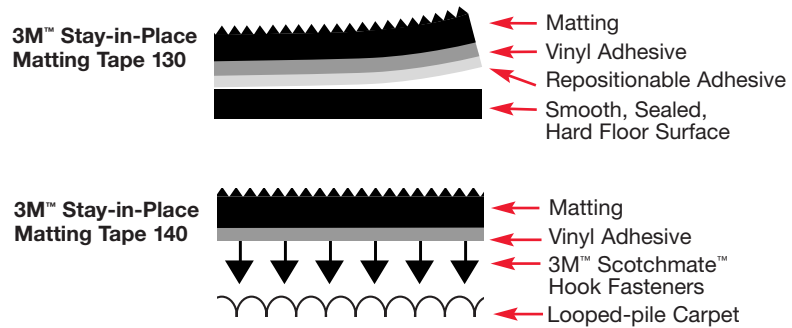

3M™ Matting Edging

- Tapered vinyl strips provide a transition from the floor to the mat
- Makes it easier for wheeled traffic

High Profile Edging

- Black, Granite, Safety Yellow
- 40' roll



Medium Profile Edging

- Black, Granite
- 75' roll



Low Profile Edging

- Black
- 75' roll



3M™ Mat Tack

- Helps keep mats in position on carpeting
- Spray or brush onto mat backing
- Not recommended for deep-pile carpeting



3M™ Blue Glue Multi-Purpose Carpet Adhesive

- For use with 3M™ Nomad™ Carpet Matting 9800
- Allows carpet to be repositioned or removed without damage
- Clean up with hot water and ammonia-base wax stripper



3M™ Matting Seaming Tape

- Use with 3M™ Matting Adhesive
- Brown
- 2" x 100' roll



3M™ Matting Adhesive

- For use with 3M™ Matting Tape and edging materials
- 3-oz. tube






3M™ Matting Seaming Kit

- Includes 2" x 10" roll of tape and 3-oz. tube of adhesive




3M™ Carpet Sweepers 4500 & 6000

- Whisks away dirt and debris from carpet, tile, linoleum or wood floor surfaces
- Features two rubber rotor blades that turn toward each other, efficiently collecting both large and small debris




3M™ Safety-Walk™ Work Area Flooring Products

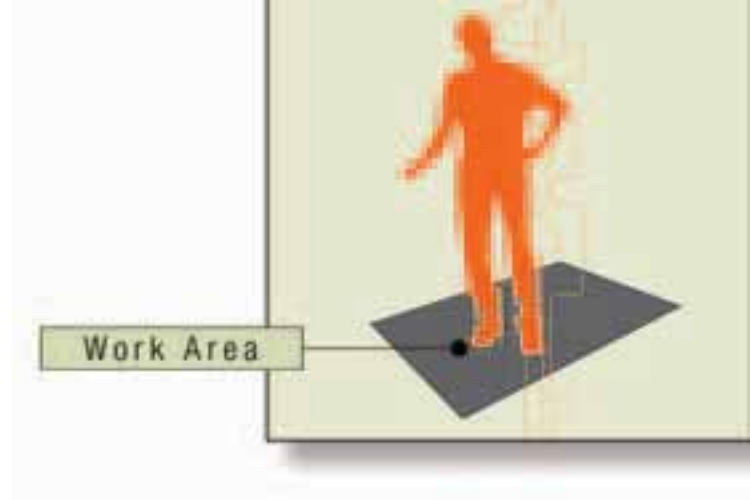



Featuring:
3M™ Safety-Walk™ Cushion
Matting 3270 and 3270E*

- Ideal for areas of the workplace where people stand for extended periods of time
- Solid topped surface provides a high coefficient of friction for more secure footing
- Spring-coiled vinyl compresses uniformly and continually for greater comfort
- Suitable for light to medium industrial use

* Denotes integral edging

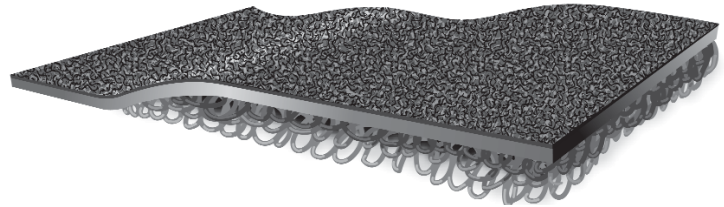

We also offer a complete line of 3M™ Safety-Walk™ Work Area Matting and slip-resistant tapes and treads. Ask your 3M sales representative for details.

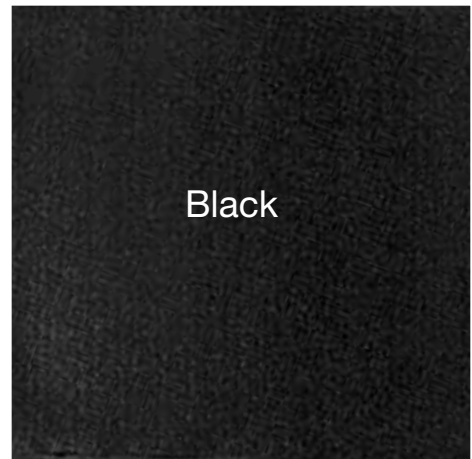

3M™ Nomad™ Entrance Matting Systems Warranty

Limited Warranty. 3M warrants that its 3M™ Nomad™ Entrance Matting Systems products (see below) will be free from defects in material and manufacture, and will give satisfactory performance for applications recommended in 3M’s literature for the period indicated below from date of purchase from 3M’s authorized distributor. 3M shall not be liable for any injury, loss or damage, direct, indirect, incidental, special or consequential arising out of the use of the matting. User is otherwise responsible for determining whether the product is fit for a particular purpose and suitable for user’s application. This warranty will not apply to damage incurred as a result of abuse or misuse (e.g., burns, cuts, or tears) or because of failure to properly install, clean or maintain the product. If this 3M product is defective within the stated warranty period, user must notify 3M’s authorized distributor and supply a dated, paid invoice for the product. Users exclusive remedy and 3M’s sole obligation shall be, at 3M’s option, to replace or refund the purchase price of the product based on the following schedule. Replacement or refund is one time only. Warranty time begins upon the date of the original purchase invoice.

Limitation of Liability. Except where prohibited by law, 3M will not be liable for any loss or damage arising from this 3M product, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted, including warranty, contract, negligence or strict liability. This warranty gives you specific legal rights, and you may have other rights which vary from state to state, or country to country.

Product	Warranty Period
3M™ Nomad™ Medium Traffic Backed Scraper Matting 6050	6 months: replacement 6 months-1 year: 25% off replacement matting
3M™ Nomad™ Medium Traffic Backed Z-web Scraper Matting 6250	6 months: replacement 6 months-1 year: 25% off replacement matting
3M™ Nomad™ Heavy Traffic Unbacked Scraper Matting 8100	1 year: replacement 1-2 years: 50% off replacement matting
3M™ Nomad™ Heavy Traffic Backed Scraper Matting 8150	1 year: replacement 1-2 years: 50% off replacement matting
3M™ Nomad™ Extreme Traffic Z-web Scraper Matting 9100	1 year: replacement 1-2 years: 50% off replacement matting 2-3 years: 25% off replacement matting
3M™ Nomad™ Carpet Matting 4000	6 months: replacement 6 months-1 year: 25% off replacement matting
3M™ Nomad™ Medium Traffic Carpet Matting 6500	6 months: replacement 6 months-1 year: 25% off replacement matting
3M™ Nomad™ Heavy Traffic Carpet Matting 8850	1 year: replacement 1-2 years: 50% off replacement matting
3M™ Nomad™ Extreme Traffic Wall-to-Wall Carpet Matting 9800	1 year: replacement 1-2 years: 50% off replacement matting 2-3 years: 25% off replacement matting
3M™ Nomad™ Printed Carpet Matting 6600	6 months: replacement 6 months-1 year: 25% off replacement matting

How to reach us

For more information or to place an order, call your local 3M distributor. Or, for the name of the 3M matting distributor nearest you, call 1-800-852-9722

To get technical information about 3M matting faxed directly to you, call Fax-On-Demand: 1-800-978-9654

To speak to a technical support person, call: 1-800-626-8578

For general assistance, call: 1-800-3M-HELPS

ALASKA
11151 Calaska Circle
Anchorage, AK 99515
907-522-5200
Fax: 907-522-1645





CANADA
1840 Oxford Street East
London, Ontario, Canada
N5V 3R6
Mail to: P.O. Box 5757
London, Ontario, Canada
N6A 4T1
519-451-2500
Fax: 519-452-6262

**CONTINENTAL
UNITED STATES**
Customer Service Department
3M Commercial Care Division
3M Center, Building 223-2N-21
St. Paul, MN 55144-1000
800-852-9722
Fax: 800-447-0408

GUAM
3M Company
Building 14
171 Guerrero Drive
Tamuning, Guam 96911
671-646-9161
Fax: 671-646-7114

HAWAII
4443 Malaai Street
Honolulu, HI 96818
Mail to:
P.O. Box 30048
Honolulu, HI 96820
808-422-2721
Fax: 808-422-9557

PUERTO RICO
3M Puerto Rico, Inc.
350 Chardon Avenue
Suite 1010
San Juan, PR 00918
787-620-3000
Fax: 787-620-3012



Commercial Care Division
St. Paul, MN 55144-1000
1-800-852-9722
www.3M.com/commcare



Minimum 10% Post-Consumer Fiber

3M, Nomad, Scotchmate and Safety-Walk are trademarks of 3M.

Printed in U.S.A.

© 3M 2004

78-8134-0073-2